
NOTE:
THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THESE PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM.
EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U. S. PATENT NO. 286509)

FED. SUP CLASS
:30

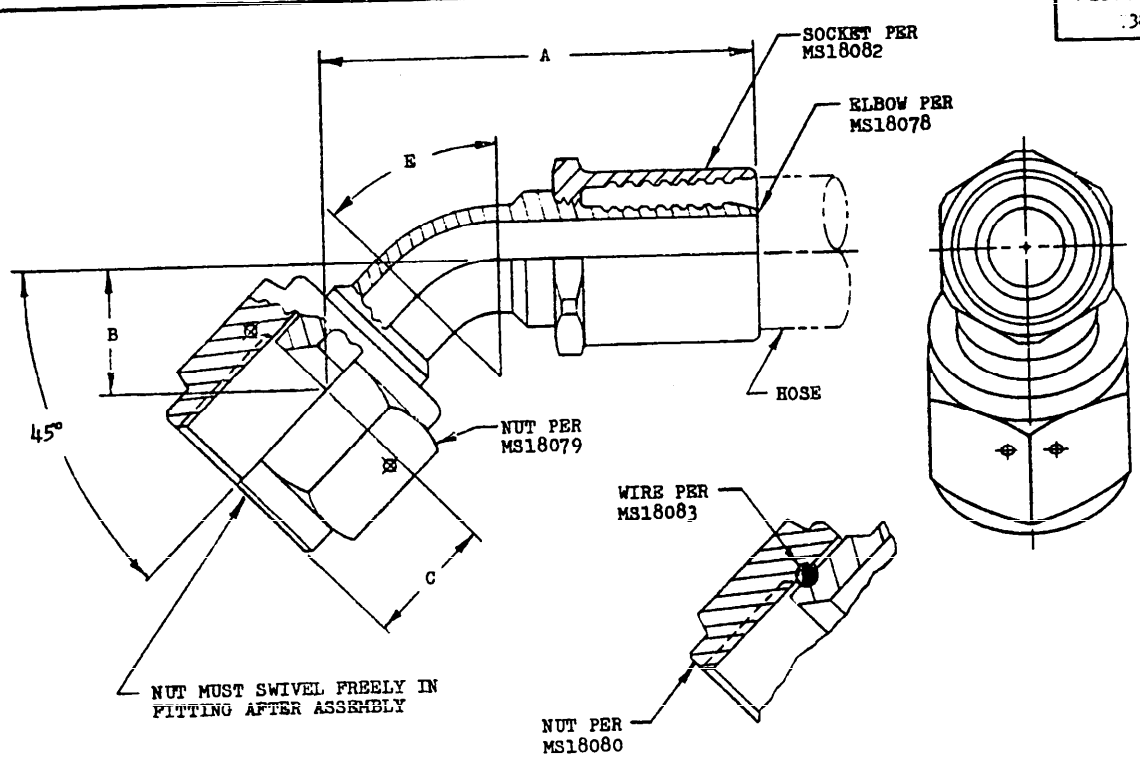

MS PART NO.	HOSE ID REF	HOSE OD REF	A MAX	B MAX	C REF	D MIN
MS 18086-03	.125	.250	1.731	.515	.337	.076
MS 18086-04	.188	.312	1.783	.504	.375	.125
MS 18086-05	.250	.375	1.838	.533	.375	.187
MS 18086-06	.313	.438	2.008	.552	.375	.250
MS 18086-08	.406	.562	2.185	.573	.438	.332
MS 18086-10	.500	.656	2.568	.654	.515	.421
MS 18086-12	.625	.781	3.010	.837	.562	.531
MS 18086-16	.875	1.109	3.230	.954	.620	.770
MS 18086-20	1.125	1.359	3.522	.965	.620	.996
MS 18086-24	1.375	1.672	3.931	1.167	.765	1.246

NOTES:

1. A NON-STANDARD SWIVEL NUT MAY BE USED PROVIDED THE HEX. DIMENSIONS AND THE THREAD DIMENSIONS ARE IN ACCORDANCE WITH MS18079 AND PROVIDED THE NUT CANNOT BE REMOVED FROM ASSEMBLY.
2. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES: ANGLES ±1°.
3. VENDOR NAME OR TRADEMARK AND MS PART NO. TO BE PERMANENTLY MARKED ON FITTING PER AS478-2C2.
4. THESE FITTINGS ARE TO BE ASSEMBLED AS SHOWN ON DRAWING MS18064.
5. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN ANGLE E; HOWEVER A BALL D DIA MUST PAST THRU.
6. THE INTERIOR SURFACE OF THE FITTING SHALL BE SMOOTH AND FREE FROM PROJECTIONS.

APPROVED 26 April 1965 REVISED

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Other Cust	TITLE FITTING END - TETRAFLUOROETHYLENE HOSE MEDIUM PRESSURE, 45° SWIVEL NUT, CORROSION RESISTANT STEEL	MILITARY STANDARD MS18086 (WP)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.