INCH-POUND
MS27308C
w/AMENDMENT 1
19 November 2019
SUPERSEDING
MS27308C
01 March 2011

PERFORMANCE SPECIFICATION SHEET

BUS CONDUCTOR, CONNECTOR, BATTERY CELL, OFFSET

INACTIVE FOR NEW DESIGN AFTER 2 JUNE 1995

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81757.

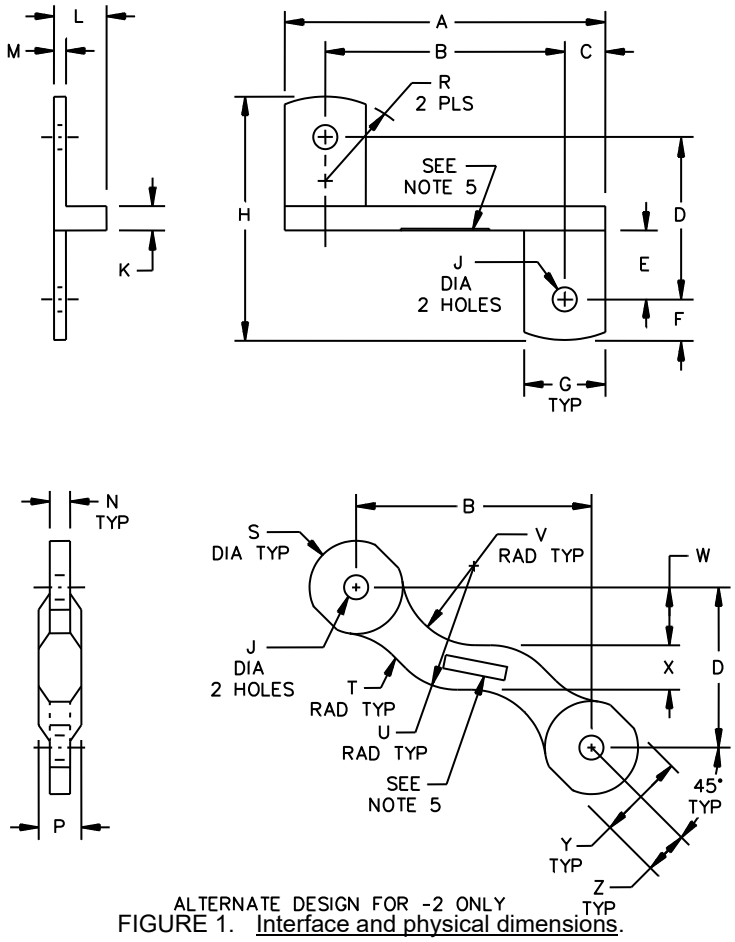


FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

Ltr	Dash no.	Inches		Millimeters		Ltr	Dash no.	Inches		Millimeters	
		Min	Max	Min	Max			Min	Max	Min	Max
A	-1	2.115	2.135	53.72	54.23	N	All	.177	.197	4.50	5.00
	-2	2.780	2.800	70.61	71.12						
B	-1	1.615	1.635	41.02	41.53	P	All	.365	.385	9.27	9.78
	-2	2.030	2.050	51.56	52.07						
C	-1	.240	.260	6.10	6.60	R	All	.719	.781	18.26	19.84
	-2	.365	.385	9.27	9.78						
D	-1	1.070	1.090	27.18	27.69	S	All	.800	.840	20.32	21.34
	-2	1.380	1.400	35.05	35.56						
E	-1	.468	.488	11.89	12.40	T	All	.609	.629	15.47	15.98
	-2	.560	.580	14.22	14.73						
F	-1	.302	.322	7.67	8.18	U	All	.984	1.004	24.99	25.50
	-2	.365	.385	9.27	9.78						
G	-1	.469	.531	11.91	13.49	V	All	.609	.629	15.47	15.98
	-2	.719	.781	18.26	19.84						
H	-1	1.689	1.719	42.90	43.66	W	All	.502	.512	12.75	13.00
	-2	2.125	2.155	53.98	54.74						
J	-1	.173	.183	4.39	4.65	X	All	.365	.385	9.27	9.78
	-2	.213	.223	5.41	5.66						
K	-1	.115	.135	2.92	3.43	Y	All	.750	.810	19.05	20.57
	-2	.240	.260	6.10	6.60						
L	-1	.240	.260	6.10	6.60	Z	All	.375	.405	9.53	10.29
	-2	.365	.385	9.27	9.78						
M	-1	.052	.072	1.32	1.83						
	-2	.115	.135	2.92	3.43						

FIGURE 1. Interface and physical dimensions - Continued.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.010 for inches and ±5° for angles.
3. Metric equivalents are given for general information only.
4. Remove all burrs and sharp edges.
5. Steel stamp Part or Identifying Number (PIN): .005 inch (0.13 mm) deep minimum using .125 inch (3.18 mm) high characters before plating.

REQUIREMENTS:

Material: Copper in accordance with ASTM-B187/B187M or ASTM B272.

Finish: Nickel plate in accordance with SAE-AMS-QQ-N-290, type V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

Qualification inspection: Qualification inspection is not required and shall be replaced by first article inspection per table III and IV of MIL-PRF-81757.

Referenced documents. In addition to MIL-PRF-81757, this document references the following:

ASTM-B187/B187M SAE-AMS-QQ-N-290 ASTM B272

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Air Force - 85
DLA - CC

Review activity:
Air Force - 71

Preparing activity:
DLA - CC

(Project number 6140-2020-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.