

FED. SUP CLASS
6240

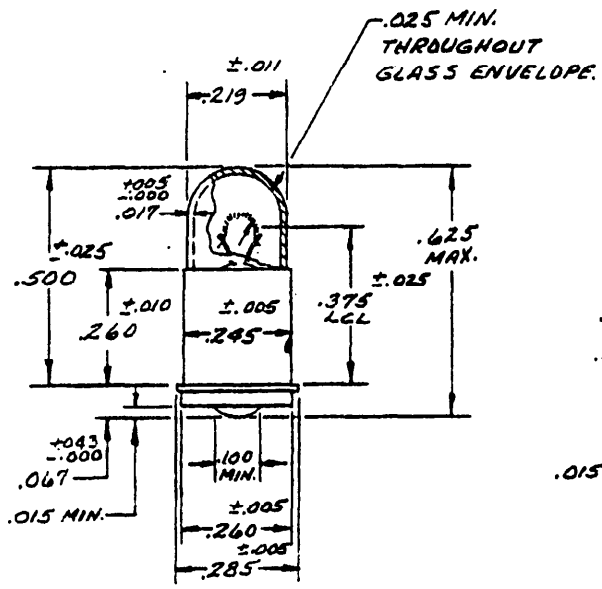

-339

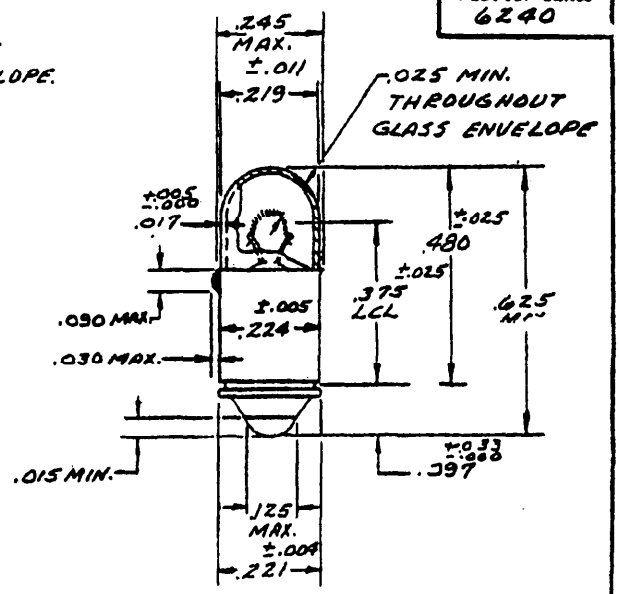

-341

DASH NO. **	FINISH	RATED VOLTAGE	RATED CURRENT	MEAN SPHERICAL CANDLE POWER	AVERAGE * LIFE (HRS.)
-339 AS15	CLEAR	5.0	.20 ± 10%	.34 ± 15%	15M
-341 AS15	CLEAR	5.0	.20 ± 10%	.34 ± 15%	15M

FILAMENT SHALL BE CENTERED.

** "AS" (AGED AND SELECTED) INDICATES THE LAMPS HAVE BEEN AGED FOR A MINIMUM OF 10 HOURS AT RATED VOLTAGE PRIOR TO SELECTION FOR MSCP.

MEAN SPHERICAL CANDLE POWER (MSCP) MUST BE OBTAINABLE AT RATED VOLTAGE.

MEAN SPHERICAL CANDLE POWER (MSCP) AT 1000 HOURS SHALL NOT BE LESS THAN 90% OF INITIAL MSCP WHEN MEASURED AT RATED VOLTAGE.

MSCP OF LAMP SHALL NOT BE LESS THAN 80% OF INITIAL MSCP AFTER BEING TESTED FOR 2000 HOURS OF OPERATION AT 5.0 VOLTS IN A 90% NITROGEN, 10% HELIUM ATMOSPHERE AT A TEMPERATURE OF 100°C AMBIENT.

* LAMP MANUFACTURER SHALL SUBMIT TEST CERTIFICATION DATA TO PROCURING AGENCY TO SUBSTANTIATE LAMP LIFE.

BASE SHELL MATERIAL SHALL BE BRASS.

DIMENSIONS IN INCHES

REVIEW ACTIVITIES
AIR FORCE-11, 82

APPROVED 21 JUNE 1967 REVISED

P.A. AIR FORCE-11 Other Cust	TITLE LAMP, INCANDESCENT-MINIATURE INTEGRAL LIGHTING, T-1 3/4 SIZE	MILITARY STANDARD MS 27569 (USAF)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

This standard has been approved by the Department of the Air Force and is mandatory for use by the activity. All other military activities are required to comply to the extent specified in their contracts.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:43Z
Check the source to verify that this is the current version before use.