INCH-POUND
MS27722E
7 August 2019
SUPERSEDING
MS27722D
7 May 2003

DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, ONE POLE, ENVIRONMENTALLY SEALED, INTEGRATED WIRE TERMINALS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-DTL-3950.


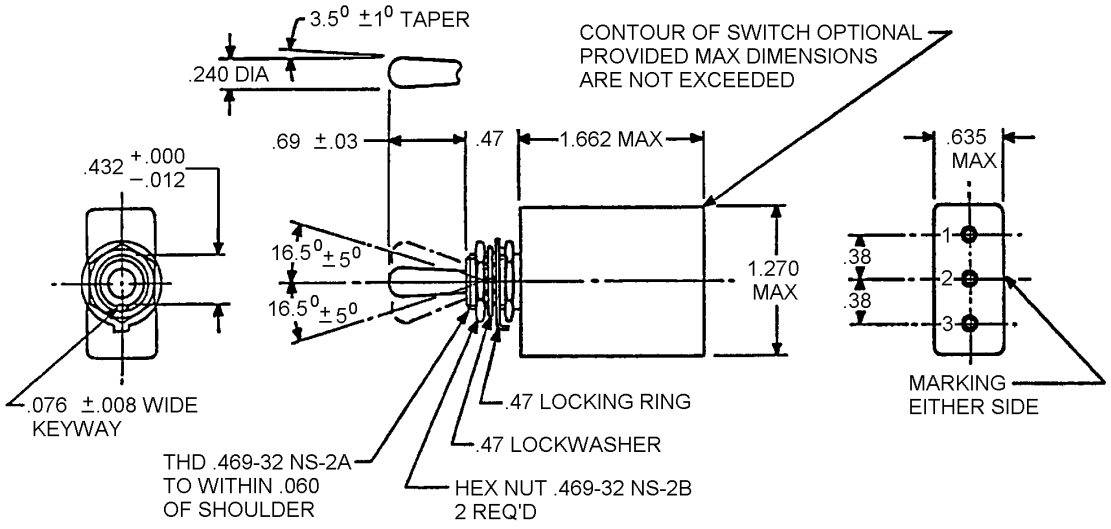


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

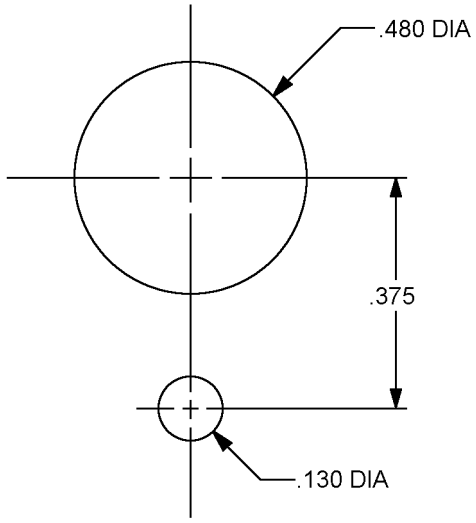

RECOMMENDED PANEL CUTOUT

Inches	mm	Inches	mm	Inches	mm
.008	0.20	.240	6.10	.47	11.90
.012	0.30	.375	9.52	.480	12.19
.03	0.8	.38	9.70	.635	16.13
.062	1.57	.432	10.97	.69	17.50
.076	1.93	..445	11.30	1.270	32.26
.130	3.30	.469	11.91	1.662	42.21

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. Contact installing and removal tool, M81969/14-03, in accordance with SAE-AS81969/14.
5. For hardware detail specifications, see appendix of MIL-DTL-3950
6. Grommet holes or access to grommet holes, on nonfunctional terminals, optional.
7. The terminal end of the switch shall be color coded blue to indicate contact size.
8. Sealing plugs may be used in nonfunctional grommet holes when applicable.

FIGURE 1. Dimensions and configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Switching characteristics: See table I. Direction of movement of internal mechanism is opposite to the direction of the toggle movement.

Maximum weight: .105 pound.

Grommet sealing plug: MS27488-16-1.

Sealing grommet: Sealing grommet shall seal on a smooth wire insulation of .068 (1.73 mm) to .103 (2.62 mm) diameters.

Part or Identifying Number (PIN): See table I.

Electrical ratings: See table I.

Hardware: For detailed specifications, see appendix of MIL-DTL-3950.

Tests shall be performed in accordance with MIL-DTL-3950 except:

a. During all tests, switches shall be fully wired with the appropriate wire and terminal contacts.

b. Contact Voltage drop: The contact voltage drop with two terminals and the switch contact in series shall not exceed 8 millivolts measured from one wire contact through the contact to the other wire contacts.

TABLE I. Switching characteristics and electrical ratings.

PIN's	Circuit with toggle lever in			Current capacity (amperes) 28 V dc			Current capacity (amperes) 115 V ac, 60 and 400 Hz		
	Keying side	Center	Opposite keying side	Lamp load	Resistive load	Inductive load	Lamp load	Resistive load	Inductive load
MS27722-21	1-2 On	Off	2-3 On	5	20	15	3	15	10
MS27722-22	Off	None	2-3 On						
MS27722-23	1-2 On	None	2-3 On						
MS27722-24	None	Off	2-3 On						
MS27722-25	None	Mom off	2-3 On	4	15	10	2	15	7
MS27722-26	1-2 Mom on	None	2-3 On						
MS27722-27	1-2 Mom on	Off	2-3 Mom on						
MS27722-28	1-2 Mom on	Off	None						
MS27722-29	Mom off	None	2-3 On						
MS27722-30	1-2 Mom on	None	Off						
MS27722-31	1-2 Mom on	Off	2-3 On						
MS27722-32	None	On 1-2	2-3 Mom on						
MS27722-33	None	On 1-2	2-3 On	5	20	15	3	15	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents:
MIL-DTL-3950
MS27488
SAE-AS81969/14

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2019-014)

Review activities:
Army - AR, AV, EA, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.