
USER SYMBOLS:
REVIEWER SYMBOLS:
ARMY - MI
DOD - CS

FED. SUP CLASS
1650

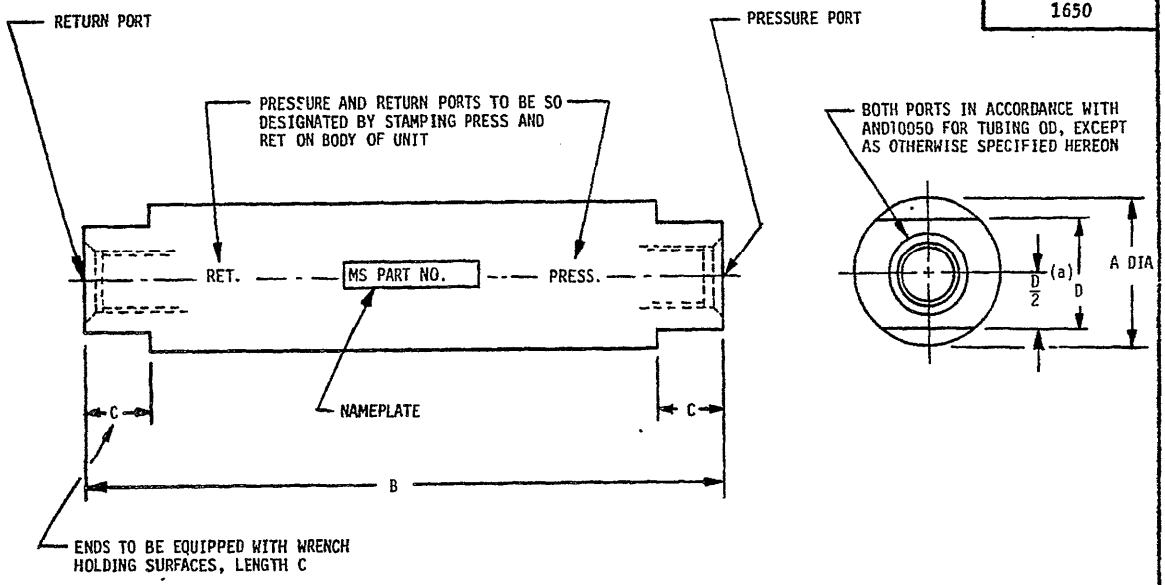

DASH NUMBER (b) RATED FLOW PRESSURE SETTING RANGE, PSI				TUBING OD	A MAX DIA	B	C MIN	(a) D	RATED FLOW GPM
500 TO 825	825 TO 1400	1400 TO 2300	2300 TO 3850						
-A4	-B4	-C4	-D4	1/4	1.000	4.000	.438	.688 +.002 -.011	2.5
-A6	-B6	-C6	-D6	3/8	1.188	5.000	.500	.813 +.002 -.012	7.0
-A8	-B8	-C8	-D8	1/2	1.375	6.000	.625	1.000 +.002 -.014	12.0
-A12	-B12	-C12	-D12	3/4	1.625	7.000	.750	1.375 +.002 -.010	32.0

DASH NO.	FIIN	DASH NO	FIIN	DASH NO	FIIN	DASH NO	FIIN
-A4		-B4		-C4		-D4	
-A6		-B6		-C6		-D6	
-A8		-B8		-C8		-D8	
-A12		-B12		-C12		-D12	

(a) HOLDING SURFACES AT WIDTH D MAY BE OPTIONAL, WRENCH FLATS OR HEX. ANGULAR POSITION IS OPTIONAL.

(b) PRESSURE VALUES REFER TO DIFFERENTIAL PRESSURE BETWEEN VALVE PORTS WITH 200 ± 25 PSI BACK PRESSURE AT RETURN PORT. VALVES MAY BE PURCHASED FOR ADJUSTMENT BY THE USER BY SPECIFYING THE FIRST DASH NUMBER ONLY OR PRE-SET TO A SPECIFIC PRESSURE BY ADDING THE REQUIRED PRESSURE SETTING AS A SECOND DASH NUMBER.
EXAMPLE OF PART NUMBER: MS28893-D6 = VALVE FOR PRESSURE RANGE 2300 TO 3850 PSI, 3/8 OD TUBING.
EXAMPLE OF PART NUMBER CODED FOR PRE-SET PRESSURE:
MS28893-D6-3400 = VALVE FOR PRESSURE RANGE 2300 TO 3850 PSI, 3/8 OD TUBING, RATED FLOW PRESSURE SETTING 3400 ± 25 PSI.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .031.

FOR INSTALLATION, CLEARANCE SHALL BE ALLOWED FOR THE MAXIMUM OVER-ALL DIMESIONS SHOWN ON THE DRAWING.

VALVES ADJUSTABLE TO THE RANGE OF MORE THAN ONE CLASS SHALL CARRY THE DESIGNATION OF THE LOWEST AND HIGHEST CLASS IN THE PART NUMBER. FOR EXAMPLE, A VALVE ADJUSTABLE FROM 1,400 TO 3,850 PSI FOR 3/8 TUBING WOULD BE MS28893-CD6

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCE INDUSTRY STANDARDS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

APPROVED 20 NOV 57 REVISED (A) 30 JULY 81

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

Approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

This military standard is

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE VALVE, HYDRAULIC RELIEF, CYLINDRICAL, TYPE II SYSTEMS	MILITARY STANDARD MS28893
PROCUREMENT SPECIFICATION MIL-V-8813	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.