
FED. SUP CLASS
5315

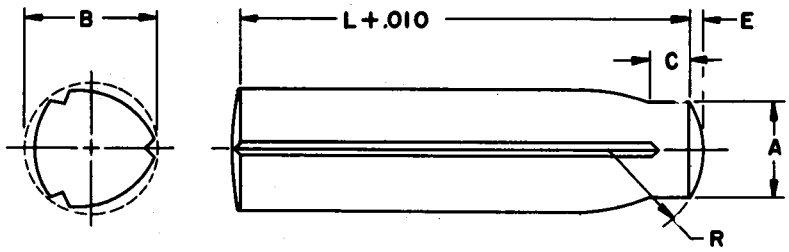

NOMINAL SIZE		1/16	5/64	3/32	1/8
A DIAMETER	MAX MIN	.0625 .0615	.0781 .0771	.0938 .0928	.1250 .1230
C PILOT LENGTH	REF	.031?	.0312	.0312	.0312
E *CROWN HEIGHT	REF	.0065	.0087	.0091	.0130
R RADIUS	MAX MIN	.0881 .0681	.1037 .0837	.1350 .1150	.1662 .1462
RECOMMENDED HOLE SIZE	MAX MIN	.0640 .0625	.0798 .0781	.0956 .0938	.1271 .1250
SINGLE SHEAR STRENGTH - LBS	MIN	20?	310	440	790

L LENGTH	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.002
1/4	1	.068	5	.084				
3/8	2	.068	6	.084	10	.101	14	.134
1/2	3	.068	7	.084	11	.101	15	.134
5/8	4	.068	8	.084	12	.101	16	.134
3/4			9	.084	13	.101	17	.134
1							18	.133
1-1/4							19	.132

For additional sizes see sheet 2.

MATERIAL: Steel, cold-drawn, B1112 or 1212, in accordance with the procurement specification.
PROTECTIVE COATING: Cadmium plate in accordance with the procurement specification.
APPLICATION: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS35674-1.
NOTES: (1) Dash numbers for cadmium plated pins as shown on this revised standard are the same as the dash numbers for the cadmium or zinc plated (optional) pins shown on the original standard.
(2) Diameter "B" is the expanded diameter as measured with a ring gage.
*(3) Ends of pins may be square with .01-inch to .02-inch radius on the edges.
(4) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(5) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 11 JAN 56 REVISED Ⓐ 17 MAR 1965

REVIEWER: MI,MO,MU,WC,SH,WP,69,IS
USER: MC,YD,NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust WP 69	TITLE PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE, CARBON STEEL	MILITARY STANDARD MS 35674
PROCUREMENT SPECIFICATION MIL-P-20700	SUPERSEDES: BFCX4 and in part AEGX2	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5315

NOMINAL SIZE		5/32	3/16	7/32	1/4
A DIAMETER	MAX	.1563	.1875	.2188	.2500
	MIN	.1543	.1855	.2168	.2480
C PILOT LENGTH	REF	.0625	.0625	.0625	.0625
E *CROWN HEIGHT	REF	.0170	.0180	.0220	.0260
R RADIUS	MAX	.1975	.2600	.2912	.3225
	MIN	.1775	.2400	.2712	.3025
RECOMMENDED HOLE SIZE	MAX	.1587	.1903	.2219	.2534
	MIN	.1563	.1875	.2188	.2500
SINGLE SHEAR STRENGTH - LBS	MIN	1230	1770	2400	3140

L LENGTH	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002
1/2	20	.166	25	.198				
5/8	21	.166	26	.198	32	.230	38	.263
3/4	22	.166	27	.198	33	.230	39	.263
1	23	.165	28	.198	34	.230	40	.263
1-1/4	24	.164	29	.197	35	.230	41	.263
1-1/2			30	.197	36	.229	42	.262
1-3/4			31	.197	37	.229	43	.262
2							44	.262

NOMINAL SIZE		5/16	3/8	7/16	1/2
A DIAMETER	MAX	.3125	.3750	.4375	.5000
	MIN	.3105	.3730	.4355	.4980
C PILOT LENGTH	REF	.0937	.0937	.0937	.0937
E *CROWN HEIGHT	REF	.0340	.0390	.0470	.0520
R RADIUS	MAX	.3850	.4787	.5412	.6350
	MIN	.3650	.4587	.5212	.6150
RECOMMENDED HOLE SIZE	MAX	.3166	.3797	.4428	.5060
	MIN	.3125	.3750	.4375	.5000
SINGLE SHEAR STRENGTH - LBS	MIN	4910	7070	9620	12600

L LENGTH	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002
5/8	45	.329						
3/4	46	.329	57	.394				
1	47	.329	58	.394	69	.459	81	.525
1-1/4	48	.329	59	.394	70	.459	82	.525
1-1/2	49	.329	60	.394	71	.459	83	.525
1-3/4	50	.328	61	.393	72	.459	84	.525
2	51	.328	62	.393	73	.458	85	.525
2-1/4	52	.328	63	.393	74	.458	86	.524
2-1/2	53	.327	64	.393	75	.458	87	.524
2-3/4	54	.327	65	.393	76	.458	88	.524
3	55	.327	66	.392	77	.457	89	.523
3-1/4							90	.523
3-1/2	56	.326	67	.391	78	.456	91	.522
3-3/4							92	.522
4			68	.390	79	.455	93	.521
4-1/4							94	.521
4-1/2					80	.454	95	.520

*See Note (3), sheet 1.
For illustration, material, protective coating, and other pertinent data see sheet 1.

REVIEWER: MI, MO, MU, WC, SH, WP, 69, IS
USER: MC, YD, NSA

APPROVED 11 JAN 56 REVISED (A) FOR CHANGES SEE SHEET 1.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	WP 69

TITLE: PIN, GROOVED, HEADLESS - LONGITUDINAL STRAIGHT GROOVE, CARBON STEEL

MILITARY STANDARD
MS 35674
SHEET 2 OF

PROCUREMENT SPECIFICATION: MIL-P-20700

SUPERSEDES: BFCX4 and in part AEGX2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.