
FED. SUP CLASS
5315

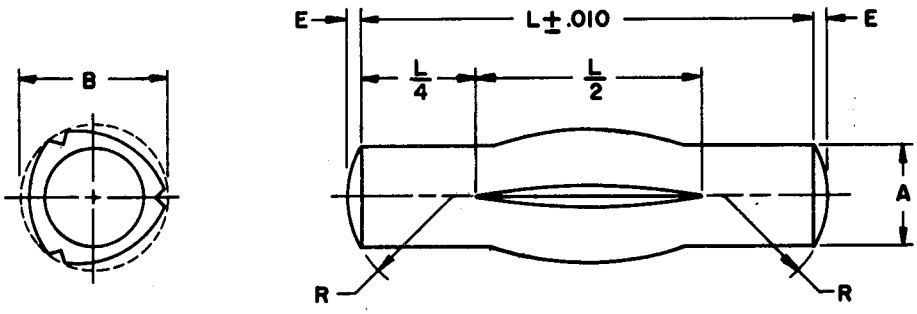

NOMINAL SIZE		1/16	5/64	3/32	1/8
A DIAMETER	MAX	.0625	.0781	.0938	.1250
	MIN	.0615	.0771	.0928	.1230
E *CROWN HEIGHT	REF	.0065	.0087	.0091	.0130
R RADIUS	MAX	.0881	.1037	.1350	.1662
	MIN	.0681	.0837	.1150	.1462
RECOMMENDED HOLE SIZE	MAX	.0640	.0798	.0956	.1271
	MIN	.0625	.0781	.0938	.1250
SINGLE SHEAR STRENGTH - LBS	MIN	120	190	270	490

L LENGTH	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.002
1/4	201	.068						
3/8	202	.068	206	.084	210	.101	215	.134
1/2	203	.068	207	.084	211	.101	216	.134
5/8	204	.068	208	.084	212	.101	217	.134
3/4	205	.068	209	.084	213	.101	218	.134
1					214	.101	219	.134
1-1/4							220	.134
1-1/2							221	.134

For additional sizes see sheet 2.

MATERIAL: Brass, bar or wire, 1/2 hard, in accordance with the procurement specification.
PROTECTIVE COATING: Black Oxide in accordance with the procurement specification.
APPLICATION: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS35679-201.
NOTES: (1) Diameter "B" is the expanded diameter as measured with a ring gage.
*(2) Ends of pins may be square with .01-inch to .02-inch radius on the edges.
(3) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(4) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 11 JAN 56 REVISED Ⓐ 17 MAR 1965

REVIEWER: MI,MO,MU,WC,SH,WP,69,IS
USER: MC,YD,NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	WP 69

TITLE
PIN, GROOVED, HEADLESS - LONGITUDINAL CENTER GROOVE, BRASS

MILITARY STANDARD
MS 35679
SHEET 1 OF 2

PROCUREMENT SPECIFICATION
MIL-P-20700

SUPERSEDES:
AEGX2 in part

DD FORM 1 SEP 67 672-1 (Copy furnished) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 20261023T17:26Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5315

NOMINAL SIZE		5/32		3/16		7/32		1/4
A DIAMETER	MAX MIN	.1563 .1543		.1875 .1855		.2188 .2168		.2500 .2480
E *CROWN HEIGHT	REF	.0170		.0180		.0220		.0260
R RADIUS	MAX MIN	.1975 .1775		.2600 .2400		.2912 .2712		.3225 .3025
RECOMMENDED HOLE SIZE	MAX MIN	.1587 .1563		.1903 .1875		.2219 .2188		.2534 .2500
SINGLE SHEAR STRENGTH - LBS	MIN	760		1100		1500		1960
L LENGTH		DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002
1/2		222	.166	228	.198				
5/8		223	.166	229	.198	236	.230	243	.263
3/4		224	.166	230	.198	237	.230	244	.263
1		225	.166	231	.198	238	.230	245	.263
1-1/4		226	.166	232	.198	239	.230	246	.263
1-1/2		227	.166	233	.198	240	.230	247	.263
1-3/4				234	.198	241	.230	248	.263
2				235	.198	242	.230	249	.263
2-1/4								250	.263

*See Note (2), sheet 1.
For illustration, material, protective coating, and other pertinent data see sheet 1.

INTERCHANGEABILITY TABLE

The pins covered by the dash numbers given in original issue of this standard are cancelled after the approval date on this document. Use the dash numbers given in the preceding sheet of this revision. The cancelled pins cannot always replace the new pins and should be used until existing stocks are depleted. Use only the new pins for design and replacement. Replacement shall be in accordance with this table.

PART NUMBERS	
CANCELLED	NEW
MS35679-1	MS35679-201
-2	-202
-3	-203
-4	-204
-5	-205
-6	-206
-7	-207
-8	-208
-9	-209
-10	-210
-11	-211
-12	-212
-13	-213
-14	-214
-15	-215
-16	-216
-17	-217
-18	-218
-19	-219
-20	-220
-21	-221
-22	-222
-23	-223
-24	-224
-25	-225

PART NUMBERS	
CANCELLED	NEW
MS35679-26	MS35679-226
-27	-227
-28	-228
-29	-229
-30	-230
-31	-231
-32	-232
-33	-233
-34	-234
-35	-235
-36	-236
-37	-237
-38	-238
-39	-239
-40	-240
-41	-241
-42	-242
-43	-243
-44	-244
-45	-245
-46	-246
-47	-247
-48	-248
-49	-249
-50	-250

APPROVED 11 JAN 56 REVISED (A) FOR CHANGES SEE SHEET 1.

REVIEWER: MI, MO, MU, WC, SH, WP, 69, IS
USER: MC, YD, NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC
Other Cust WP 69

TITLE
PIN, GROOVED, HEADLESS - LONGITUDINAL
CENTER GROOVE, BRASS

MILITARY STANDARD
MS 35679

PROCUREMENT SPECIFICATION
MIL-P-20700

SUPERSEDES:
AEGX2 in part

SHEET 2 OF

DD, FORM SEP 67 672-1 (Coordinating) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.