
FED SUP CLASS
4730

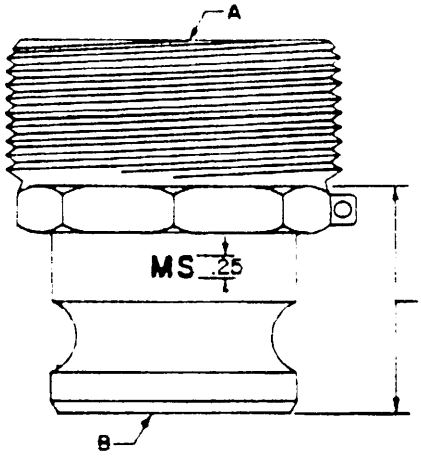

DASH NUMBER	CLASS (TYPE)		NOMINAL END SIZE	
	CLASS 1	CLASS 2	A	B
-1	X		4	3
-2		X		
-3	X		3	2
-4		X		
-5	X		2	1
-6		X		
-7	X		6	4
-8		X		
-9	X		1-1/2	2
-10		X		
-11	X		2	1-1/2
-12		X		
-13	X		3	4
-14		X		
-15	X		1	1-1/2
-16		X		

(D) DENOTES CHANGES

APPROVED 15 DECEMBER 1961 REVISED (A) 7 MARCH 1973 (3) 19 AUGUST 1975 (-) 16 JULY 1980 (D) 15 MAY 1989

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

User activities :
Navy - SH

Review activities :
Army - GL
Air Force - 82
DLA - CS

P.A. ARMY-ME
Other Cust
NAVY-YD
A F - 99

INTERNATIONAL INTEREST
STANAG NO.
2761
(STAG 240

TITLE
REDUCER, EXTERNAL PIPE THREAD BY QUICK DISCONNECT, CAM-LOCKING TYPE, MALE, TYPE XII

MILITARY STANDARD
MS 49001

PROCUREMENT SPECIFICATIONS
MIL-C-27487

SUPERSEDES

SHEET 1 OF 2

DD FORM 1 SEP 87 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

4730-0688

AMSC N/A

Source: https://assist.dla.mil - Downloaded: 2026-10-25T17:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

NOTES:

1. MATERIAL
   a. BODY
      CLASS 1 ALUMINUM - QQ-A-601, ALLOY 356, TEMPER T6 OR ALLOY 40E, TEMPER T5.
      CLASS 2 BRASS - QQ-C-390, ALLOY 836, 844, OR 922; OR BRASS, QQ-B-626, COPPER ALLOY 377.
2. FINISH
   a. BODY
      CLASS 1 ALUMINUM - MIL-A-8625, ANODIC COATING, CLASS 1, TYPE II, THICKNESS NOT LESS THAN 0.0004 IN.
      CLASS 2 BRONZE OR BRASS - PLAIN.

(D) 3. THREADS - IN ACCORDANCE WITH FED-STD-H28, SECTION VIII.

4. BURRS AND ALL FOREIGN MATTER SHALL BE REMOVED.

5. HYDROSTATIC TEST PRESSURE - 1 THROUGH 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I..

6. WORKING PRESSURE - 1 THROUGH 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I..

(D) 7. DIMENSIONS - IN INCHES. NOMINAL UNLESS OTHERWISE SPECIFIED. TOLERANCES ±.02.

8. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS49001-1.

(D) 9. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

(D) 11. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

NOTE: CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 15 DECEMBER 1961 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 2

(D) DENOTES CHANGES

P.A ARMY-MC Other Cust NAVY - YD AF - 99	INTERNATIONAL INTEREST STANAG NO. 2761 QSTAG 240	TITLE REDUCER, EXTERNAL PIPE THREAD BY QUICK DISCONNECT, CAM-LOCKING TYPE, MALE, TYPE XII	MILITARY STANDARD MS 49001
Procurement Specifications MIL-C-27487		SUPERSEDES	SHEET 2 OF 2

DD FORM (MAY 73) 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23117:52Z
Check the source to verify that this is the current version before use.