

FED. SUP CLASS
2330

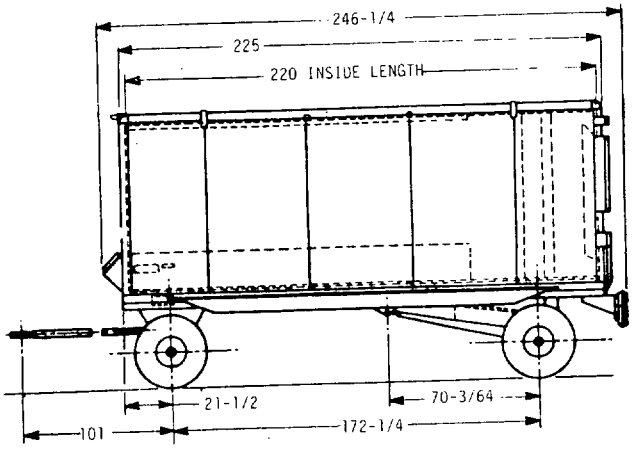

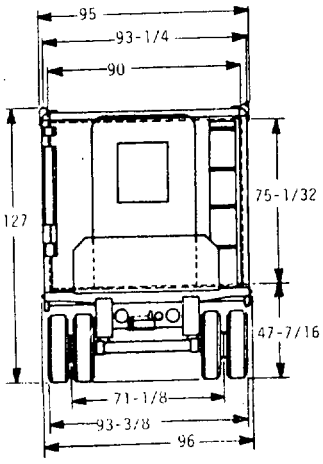

APPROVED 20 NOV 65 REVISED (A) 10 APR 85

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500 019-1	8523856

P.A. ARMY-AT Other Cust	TITLE TRAILER, VAN: LAUNCHING CONTROL, 4 WHEEL, M262AIC	MILITARY STANDARD MS500019(AT)
PROCUREMENT SPECIFICATION MIL-T-45393	SUPERSEDES:	SHEET | OF 2

DD FORM 1 SEP 57 672-1 LIMITED COORDINATION PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2020-10-29T20:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, 2-1/2 TON, 6 X 6

WEIGHTS:

FRONT DOLLY	1400	
REAR DOLLY	1500	
BODY	4020	
NET, EMPTY	6920	
PAYLOAD	5530	
GROSS VEHICLE WEIGHT	12450	LBS
BODY	4020	
PAYLOAD	5530	
TOTAL SPRUNG WEIGHT	9550	LBS

WEIGHT DISTRIBUTION:

LUNETTE EYE		
FRONT AXLE	6190	
REAR AXLE	6260	LBS

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

FORDING DEPTH: 47 INCHES

MAXIMUM TOWING SPEEDS:

HIGHWAY:	50 MPH
CROSS COUNTRY:	20 MPH

ELECTRICAL SYSTEM:

HEATER		9005301
208 VOLT, AC, 400 CYCLE, 3 PHASE		
INTERIOR, 120 VOLT, AC, 60 CYCLE		
EXTERIOR AND EMERGENCY LIGHTS,		
		24 VOLT, DC
CLEARANCE, SERVICE	2	MS35423-1
	2	MS35423-2
CLEARANCE, BLACKOUT	2	MS35424-1
	2	MS35424-2
TAIL LIGHT	1	MS51329
	1	MS51330

TRAILER DOLLIES:

FRONT M439A1K	9136235
SPRING, RIGHT	8001862
SPRING, LEFT	8001863
REAR M430A1K	9136236
SPRING, RIGHT	8001864
SPRING, LEFT	8001865

WHEELS: (DUAL)
DISK, 16 X 16-1/2, 5-7/8 OFFSET MS53044-3

TIRES: 9:00 X 16 - 8 PLY

TREAD DESIGN: REGULAR	MS35388-78
TUBES:	MS38307-10
PRESSURE:	22 PSI

SERVICE BRAKES:

DRUM SIZE:	13-1/2 X 2
ACTUATION: AIR-OVER-HYDRAULIC	
EMERGENCY RELAY VALVE:	MS53004-1
AIR RESERVOIR:	8017035
BRAKE ASSY: LEFT FRONT	8016969
RIGHT FRONT	8016970
LEFT REAR	8016971
RIGHT REAR	8016972

GENERAL:
THE M262A1C IS A VAN TYPE TRAILER WITH 4 DUAL WHEELS, DESIGNED TO HOUSE AND TRANSPORT LAUNCHING CONTROL GROUP EQUIPMENT, USED IN THE NIKE HERCULES SYSTEM FOR ACCOMMODATING THE NECESSARY EQUIPMENT FOR CONTROL OF THE LAUNCHING SECTIONS AND SUPPLYING TACTICAL LAUNCHING AREA INFORMATION TO THE GUIDANCE AND CONTROL AREA.

THE BODY IS INSULATED WITH BONDED HONEYCOMB TYPE INSULATION AND PROVIDED WITH HEATING AND VENTILATING DUCTS.

THE TRAILER IS PROVIDED WITH FOUR CORNER TIE-DOWNS, FOUR FRAME TIE-DOWNS, FOUR LIFTING EYES, WHEEL CHOCKS, REAR PLATFORM, REAR BUMPER, AND A GROUND ROD STUD.
IT HAS A PIVOTING FRONT DOLLY (APPROX. 85° EACH DIRECTION FROM CENTER) AND A FIXED REAR DOLLY WHICH ARE DETACHABLE FROM THE TRAILER BED.

THE FRONT DOLLY CONSISTS OF A CONE-SHAPED FIFTH WHEEL ASSEMBLY AND INCLUDES INDEPENDENT WHEEL SUSPENSIONS, TWO COIL SPRINGS, FOUR SHOCK ABSORBERS, TWO TIE RODS, TWO DUAL WHEELS, DRAWBAR WITH AIR RESERVOIR, SERVICE AND EMERGENCY AIR LINES, DETACHABLE INTERVEHICULAR CABLE, SAFETY CHAINS, SERVICE BRAKES, POWER CLUSTER, AND EMERGENCY RELAY VALVE.

THE REAR DOLLY IS AN "H" FRAME TYPE AND INCLUDES TWO COIL SPRINGS, TWO SHOCK ABSORBERS, TWO TIE RODS, TWO DUAL WHEELS, STABILIZER BAR, SWAY-BAR, SERVICE AND HAND BRAKE, ONE SPARE WHEEL, AND ONE WHEEL WRENCH.

THE TRAILER IS EQUIPPED WITH BLACK OUT AND SERVICE CLEARANCE LIGHTS, REFLECTORS AND TAIL LIGHTS WHICH ALSO SERVE AS STOP, BLACKOUT STOP, AND BLACKOUT TAIL LIGHTS.

MISCELLANEOUS EQUIPMENT:

FIRE EXTINGUISHER:	(2)	FREON, 2-3/4 LB. PORTABLE, 10916537
LEVELING JACKS:	(2)	8002383
	(2)	8004581
STAIR ASSY: PORTABLE, EXTENSIBLE,		8161317

REFLECTORS:

4 RED,	MS35387-1
4 AMBER,	MS35387-2

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

(A) ENTIRE STANDARD REVISED

APPROVED 20 NOV 65 REVISED (A) 10 APR 85

P.A. ARMY-AT Other Cust	TITLE TRAILER, VAN: LAUNCHING CONTROL, 4 WHEEL, M262A1C	MS PART NO. MS500 019-1	ENGINEERING DWG NO 8523856
		MILITARY STANDARD MS500019(AT)	
PROCUREMENT SPECIFICATION MIL-T-45393	SUPERSEDES:	SHEET 2 OF 2	

DD FORM 1 SEP 57 672-1 LIMITED COORDINATION [illegible]

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.