

FED SUP CLASS
5340

USER ACTIVITIES:
ARMY-ME
NAVY-AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY-CR
AIR FORCE-82
DLA-IS

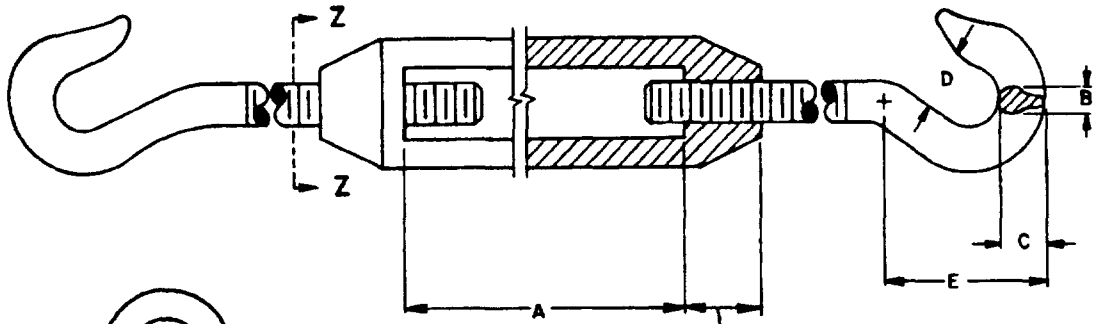



SECTION Z-Z

TURNBUCKLE ASSEMBLY

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	HOOK					
	NOMINAL THREAD SIZE	A MIN	B MIN	C MIN	D MIN	E MIN
1	.250-20	4	.187	.343	.437	1.000
2	.3125-18	4.5	.250	.437	.500	1.250
3	.375-16	6	.344	.437	.562	1.562
4 5 6	.500-13	6 9 12	.437	.625	.625	2.000
7 8 9 10	.625-11	6 9 12 18	.531	.750	812	2.437
11 12 13 14 15	.750-10	6 9 12 18 24	.625	.937	.968	2.937
16 17 18	875-9	12 18 24	.750	1.000	1.125	3.437
19 20 21 22	1.000-8	12 18 24 36	.812	1.187	1.250	3.875

APPROVED 10 FEB 1988 REVISED

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

PREPARING ACTIVITY: ARMY-AR Other Cust: NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: TURNBUCKLE, ROUND BODY, HOOK AND HOOK (TYPE I, FORM I, CLASS 5)	MILITARY STANDARD MS51564
PROCUREMENT SPECIFICATION: FF-T-791	SUPERSEDES:		PAGE 1 OF 3

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	HOOK					
	NOMINAL THREAD SIZE	A MIN	B MIN	C MIN	D MIN	E MIN
23 24 25 26	1 250-7	12 18 24 36	1 000	1 437	1.500	4 937
27 28 29 30 31	1.500-6	12 18 24 36 48	1.187	1.750	1 875	5.875
32 33 34 35	1 750-5	18 24 36 48	1.437	2.125	2.375	6 937
36 37 38	2.000-4.5	24 36 48	1.687	2 562	3.000	8 000
39 40 41	2 250-4 5	24 36 48	2 000	3 062	3 750	9.062
42 43 44	2.500-4	24 36 48	2.312	3 625	4.625	10.125

REQUIREMENTS

1. MATERIAL TURNBUCKLE BODY AND HOOK PULLS SHALL BE MANUFACTURED FROM STEEL OF A COMPOSITION CAPABLE OF WITHSTANDING THE SPECIFIED BREAKING STRENGTH IN THE PROCUREMENT SPECIFICATION

2 FABRICATION METHOD THE TURNBUCKLE BODY AND HOOK PULLS SHALL BE HOT FORGED

3. FINISH.

RUST INHIBITOR - TURNBUCKLE BODY AND HOOK PULLS SHALL BE TREATED WITH RUST INHIBITOR IN ACCORDANCE WITH MIL-C-05054 OR EQUIVALENT.

ZINC COATING - TURNBUCKLE BODY AND END PULLS SHALL BE ZINC COATED AS SPECIFIED IN PROCUREMENT SPECIFICATION, ASTM B633, TYPE II, Fe/Zn 13.

4 THREADS: ONE END PULL AND THE CORRESPONDING HEAD BODY SHALL HAVE RIGHT THREAD AND THE OTHER LEFT HAND THE THREAD SHALL BE MACHINED AFTER FABRICATION OF END PULL AND HEAD BODY

5. LENGTH OF HEAD: THE LENGTH OF THE HEAD OF THE TURNBUCKLE BODY SHALL BE NOT LESS THAN 1 1/2 TIMES THE NOMINAL THREAD SIZE FOR SIZES UP TO 1 250, AND 1 1/4 TIMES FOR SIZES GREATER THAN 1.250 NOMINAL THREAD SIZE.

6. BREAKING STRENGTH THE BREAKING STRENGTH OF THE TURNBUCKLE SHALL BE NOT LESS THAN THE VALUE SPECIFIED IN THE PROCUREMENT SPECIFICATION FOR TYPE I, FORM 1, WITH HOOK END PULLS

7. BENDING STRENGTH THE BENDING STRENGTH SHALL BE AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.

8 LENGTH OF THREAD THE LENGTH OF THE THREAD ON THE TWO END PULLS SHALL BE GREAT ENOUGH SO THAT THE ENDS OF THE END PULLS CAN BE BROUGHT INTO CONTACT WITH EACH OTHER AT THE MIDDLE OF THE BODY LENGTH

9 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE 1 AND THE FINISH CODE BELOW.

FINISH CODE

F - RUST INHIBITOR TREATMENT
Z - ZINC COATED

EXAMPLE MS51564-7Z

- FINISH CODE
- DASH NUMBER
- BASIC MS NUMBER

MS51564-7Z INDICATES TURNBUCKLE, ROUND BODY, HOOK END PULLS, 625-11 THREAD, 6-INCH CLEAR OPENING BETWEEN HEADS; ZINC COATED

APPROVED 10 FEB 1988 REVISED

USER ACTIVITIES
ARMY-ME
NAVY-AS,MC,OS,YD

REVIEWER ACTIVITIES
ARMY-CR
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for applications when shall be made from this document, when applicable

P.A. ARMY-AR Other Cust NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, ROUND BODY, HOOK AND HOOK (TYPE I, FORM I, CLASS 5)	MILITARY STANDARD MS51564
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES:		PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. TOLERANCES SHALL BE IN ACCORDANCE WITH STANDARD MANUFACTURING PRACTICES FOR TURNBUCKLES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. DIMENSION "A" IS THE TAKE UP LENGTH OR CLEAR OPENING OF THE BODY

USER ACTIVITIES:
ARMY-ME
NAVY-AS, MC, OS, YD

REVIEWER ACTIVITIES:
ARMY-CR
AIR FORCE-82
DLA-IS

APPROVED 10 FEB 1988 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. ARMY-AR Other Cust NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, ROUND BODY, HOOK AND HOOK (TYPE I, FORM I, CLASS 5)	MILITARY STANDARD MS51564
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES:		PAGE 3 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.