DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REVIEWER ACTIVITIES:
ARMY-AT
AIR FORCE-82
DLA-IS

USER ACTIVITIES:
NSA-NS

DD FORM 1426, MAY 89 **672-1** (COMPUTER GENERATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. ARMY-AR | INTERNATIONAL INTEREST: Other Cust | PROCUREMENT SPECIFICATION: NONE | SUPERSEDES: AIR FORCE-99

TITLE: BOLT, WELDING - COARSE THREAD, BAWX1 IN PART AND BAWX2 IN PART

MILITARY STANDARD


MS 51934

PAGE 1 OF 2

5306-1103

FED SUP CLASS 5306

Ⓐ ENTIRE STANDARD REVISED

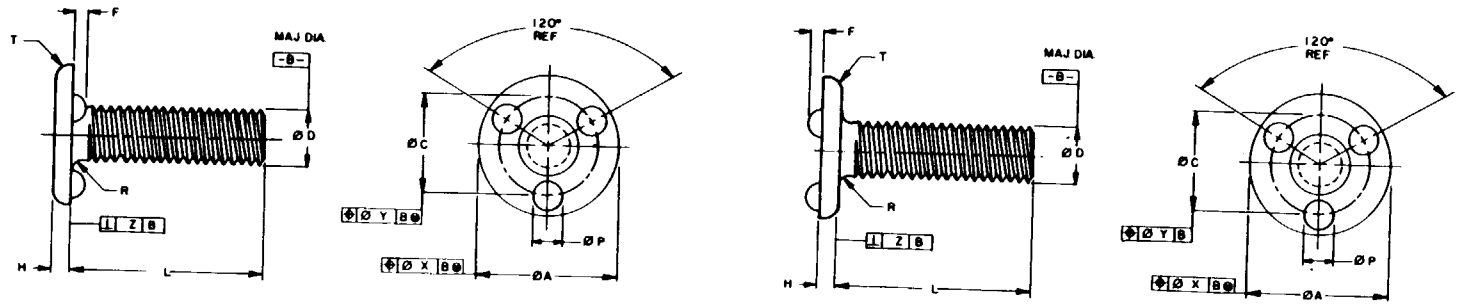

TYPE A

TYPE B

TABLE I. DASH NUMBERS AND DIMENSIONS

ØD	TYPE A							TYPE B						
	.138	.164	.190	.250	.3125	.375	.500	.138	.164	.190	.250	.3125	.375	.500
THREADS PER INCH	32 UNC-2A	32 UNC-2A	24 UNC-2A	20 UNC-2A	18 UNC-2A	16 UNC-2A	13 UNC-2A	32 UNC-2A	32 UNC-2A	24 UNC-2A	20 UNC-2A	18 UNC-2A	16 UNC-2A	13 UNC-2A
MAJOR MAX	.1372	.1631	.1890	.2489	.3113	.3737	.4985	.1372	.1631	.1890	.2489	.3113	.3737	.4985
DIAMETER MIN	.1312	.1571	.1818	.2408	.3026	.3643	.4876	.1312	.1571	.1818	.2408	.3026	.3643	.4876
ØA 1/	.3125	.3750	.4375	.5625	.7500	.8750	1.000	.2500	.3125	.3750	.5000	.6250	.7500	1.000
H 1/	.0469	.0625	.0625	.0781	.0937	.1094	.1406	.0310	.0470	.0620	.0780	.0940	.1090	.1410
ØC	.2260	.2680	.3125	.4060	.5310	.6250	.7500	.1560	.2030	.2500	.3120	.3900	.4850	.6600
ØP MAX	.0550	.0750	.0850	.1050	.1250	.1350	.1550	.0550	.0750	.0850	.1050	.1250	.1350	.1550
MIN	.0450	.0650	.0750	.0950	.1150	.1250	.1450	.0450	.0650	.0750	.0950	.1150	.1250	.1450
F MAX	.0220	.0270	.0320	.0420	.0470	.0520	.0620	.0220	.0270	.0320	.0420	.0470	.0520	.0620
MIN	.0180	.0230	.0280	.0380	.0430	.0480	.0580	.0180	.0230	.0280	.0380	.0430	.0480	.0580
T MAX	.0250	.0350	.0400	.0500	.0550	.0650	.0850	.0250	.0350	.0400	.0500	.0550	.0650	.0850
R MAX	.0200	.0250	.0300	.0400	.0450	.0500	.0600	.0200	.0250	.0300	.0400	.0450	.0500	.0600
X	.0090	.0110	.0130	.0170	.0230	.0260	.0300	.0080	.0090	.0110	.0150	.0190	.0230	.0300
Y	.0070	.0080	.0090	.0120	.0160	.0190	.0230	.0050	.0060	.0080	.0090	.0120	.0150	.0200
Z	.0110	.0130	.0150	.0200	.0260	.0310	.0350	.0090	.0110	.0130	.0170	.0220	.0260	.0350
L LENGTH 2/	DASH NUMBERS							DASH NUMBERS						
.250	-1	—	—	—	—	—	—	-37	—	—	—	—	—	—
.375	-2	-7	-14	-19	—	—	—	-38	-44	-51	-56	—	—	—
.500	-3	-8	-15	-20	—	—	—	-39	-45	-52	-57	—	—	—
.625	—	-9	-16	-21	-24	—	—	—	-46	-53	-58	-62	—	—
.750	—	-10	-17	-22	-26	-29	—	—	-47	-54	-59	-63	-66	-70
1.000	—	-11	-18	-23	-27	-31	-35	—	-48	-55	-60	-64	-67	-71
1.250	—	—	—	—	-28	-32	-36	—	—	—	—	-65	-68	-72
													-69	-73

1/ TOLERANCE + .015, -0
2/ TOLERANCE +0, -.031 THRU 1"; +0, -.125 OVER 1".

APPROVED 5 APR 63 REVISED Ⓐ 17 AUG 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: BOLT SIZES .138; 164 AND .190 SHALL BE STEEL GRADE C1010 (UNS G10100), IN ACCORDANCE WITH ASTM A545.
   BOLT SIZES .250 AND LARGER SHALL BE STEEL GRADE C1015 (UNS G10150), IN ACCORDANCE WITH ASTM A108.

2. PROTECTIVE COATING AND SURFACE TREATMENT: UNCOATED. (NONE)

3. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED STD H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD H28/20, SYSTEM 21. BOLT SHALL BE THREADED AS CLOSE TO THE HEAD AS PRACTICABLE.

4. TENSILE STRENGTH: TENSILE STRENGTH SHALL BE 60,000 PSI MINIMUM.

5. MARKING: MANUFACTURER'S IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS51934-23

- 23 — DASH NUMBER
- MS51934 — BASIC MS NUMBER

MS51934-23 INDICATES: BOLT, WELDING-COARSE THREAD; .250-20 UNC-2A, TYPE A; LENGTH 1 INCH.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. SLIGHT RADIUS IS PERMISSABLE AT JUNCTION OF PROJECTIONS AND WELDING SURFACE.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 5 APR 63 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES: NSA-NS

REVIEWER ACTIVITIES: ARMY-AT, AIR FORCE-82, DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY-AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AIR FORCE-99		BOLT, WELDING-COARSE THREAD	MS 51934
PROCUREMENT SPECIFICATION NONE	SUPERSEDES BAWX1 IN PART AND BAWX2 IN PART		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1103

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:13Z
Check the source to verify that this is the current version before use.