
FED. SUP CLASS
2330

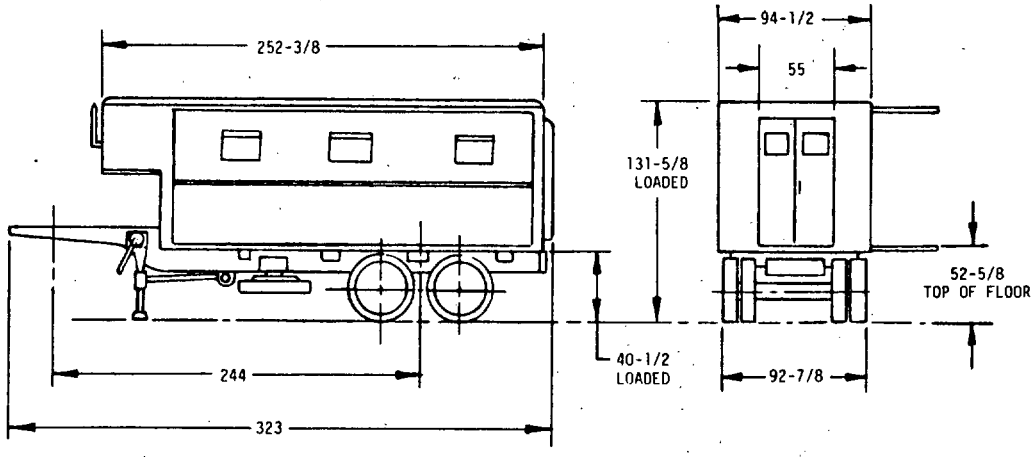

APPROVED 28 SEPT 1976 REVISED (B) 20 MAY 85

MS PART NO.	ENGINEERING DRAWING NO.
MS52133-1	8736759

(B) ENTIRE STANDARD REVISED

P.A. ARMY -AT Other Cust	TITLE SEMITRAILER, VAN: REPAIR PARTS STORAGE, 6 TON, 4 WHEEL, M750.	MILITARY STANDARD MS52133(AT)
PROCUREMENT SPECIFICATION MIL-S-62049	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR 5 TON, 6 X 6
M52 OR M818

WEIGHTS:	EMPTY	LOADED
PAYLOAD		5,000
ON WHEELS	9,160	17,220
ON KING PIN	6,150	11,010
TOTAL - LBS	15,310	33,230

CHASSIS: (REF) M295A1 MS35020 8358987

FORDING DEPTH: 44 IN

MAXIMUM TOWING SPEED: LOADED 20 MPH
(HWY) 50 MPH

KING PIN: 2 IN DIA 7067973 MS53036-1

LANDING GEAR: 11681520

LEVELING JACKS: (4) 7534672

LADDER: (REF) 8759434 (2) MS500062-F2

GENERAL:
THE M-750 SEMITRAILER IS USED FOR HOUSING AND TRANSPORTING REPAIR PARTS AND OTHER SUPPLIES. THE BODY FRAMING HAS AN INSULATED STEEL STRUCTURE WITH ALUMINUM SKINS ON THE OUTSIDE, AND ALUMINUM CLAD PLYWOOD PANELS ON THE INSIDE.
INTERFACE PROVISIONS ARE PROVIDED FOR TWO 60,000 BTU MULITFUEL HEATERS LOCATED IN THE FRONT BONNET WHICH EXTENDS OVER THE STORAGE COMPARTMENT. AN ALUMINUM EXTRUSION BOARD FLOOR, COVERED WITH NONSKID PAINT, PROVIDES HEAT DUCTS IN THE VAN BODY FLOOR AND LOWER SIDE DOORS. THIS CONFIGURATION PROVIDES A HOT AIR HEATING SYSTEM.
STATIONARY WINDOWS ARE MOUNTED, IN BOTH REAR DOORS. ADDITIONAL WORKING FLOOR AREA IS PROVIDED WHEN THE LOWER HALF OF THE SIDE PANELS ARE OPENED DOWNWARDS TO MAKE THE STORAGE BINS ACCESSIBLE FROM BOTH SIDES. PROTECTION FROM THE WEATHER IS ACHIEVED WHEN WEATHER PROOF CANVAS SIDE CURTAINS ARE ATTACHED IN THE EXPANDED PANEL POSITION. THE VAN BODY IS EQUIPPED WITH ELECTRIC LIGHTS AND 110 VOLT RECEPTACLES. POWER CABLE, (4) WIRE, 220 VOLT, 3 PHASE POTENTIAL, CABLE REEL AND COVER, AND OTHER ITEMS AS OUTLINED IN THE APPLICABLE OVE LISTS 8358987 FOR CHASSIS AND 8736759 FOR VAN.

COUNTER BALANCE: INST'N (4) 8758909
INST'N (4) 8758977

SPLASH GUARD: WHEEL (2) MS51331-4
RETAINER (2) 10869623

CARRIER ASSY: SPARETIRE 7521160

PLATFORM ASSY BODY:		INST'N 8758758
STOWAGE BOX		INST'N 8759481
JACK BOX		INST'N 8759372
CLOSURE ASSY		INST'N 10901036
APRON ASSY		INST'N 8759426
SUSPENSION: TANDEM		INST'N 8758757
AXLES REF MS35866A2	(2)	8758911
SPRINGS MAIN	(2)	7368629
SPRINGS AUX	(2)	8753890
WHEEL BEARINGS:	OUTTER	MS19081-112
	INNER	MS10981-112
WHEELS: ASSY DUAL		MS53044-5
SIZE 20 X 7-1/2 OFFSET 6-3/16		
RING WHEEL		MS53045-3
TIRES: 9 X 20 (8) PLY		MS35388-16
TREAD NDCC		
TUBES		MS35392-13
BRAKES:		
BRAKE ASSY (L H) A/H		8336701
BRAKE ASSY (R H)		8336702
SIZE 15 X 3 11/32		
FUEL TANK:		INST'N 8758759
FUEL LINE		INST'N 10919728
ELECTRICAL: SEMITRAILER		INST'N 8759445-1
HEATERS MULITFUEL		INST'N 10919630
POWER CABLE REEL		INST'N 8758762
OVE ELECTRICAL CABLE 39"		INST'N 7059246
OVE ELECTRICAL CABLE 100 FT		INST'N 7045796
ELECTRICAL: CHASSIS		INST'N 8758754
POTENTIAL 24 VOLTS		
COMPOSITE TAIL LAMP	(2)	11614157
TURN & STOP, TAIL BLACKOUT & STOP BLACKOUT 4 BULBS (1) 32CP AND (3) 3CP		
100 FOOT CABLE		7045796
36 INCH CABLE		7059246
BODY:		
BODY, MOUNTING		INST'N 8758966
BODY FRAMING		INST'N 8758902-1
BIN ROADSIDE		INST'N 11638202
BIN BONNET		INST'N 11646013
DOOR:		
DOOR, RIGHT, UPPER		INST'N 8759117-2
DOOR, RIGHT, LOWER		INST'N 8759162
REAR DOOR L H		INST'N 8759389
REAR DOOR R H		INST'N 8759391
BUMPER, REAR DOOR	(2)	7535643-1
BONNET DOOR LEFT		INST'N 8759361
BONNET DOOR RIGHT		INST'N 8759362
BONNET DOOR FRONT		INST'N 8759363
CHOCK ASSY: WHEEL	(2)	10869550
PINTLE HOOK ASSY:	8380198	MS51335-2

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BI
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BO OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 28 SEPT 1976 REVISED (B) 20 MAY 85

(B) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52133-1	8736759

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, VAN: REPAIR PARTS STORAGE, 6 TON, 4 WHEEL, M750

MILITARY STANDARD
MS52133(AT)

PROCUREMENT SPECIFICATION
MIL-S-62049

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.