
FED. SUP CLASS
2530

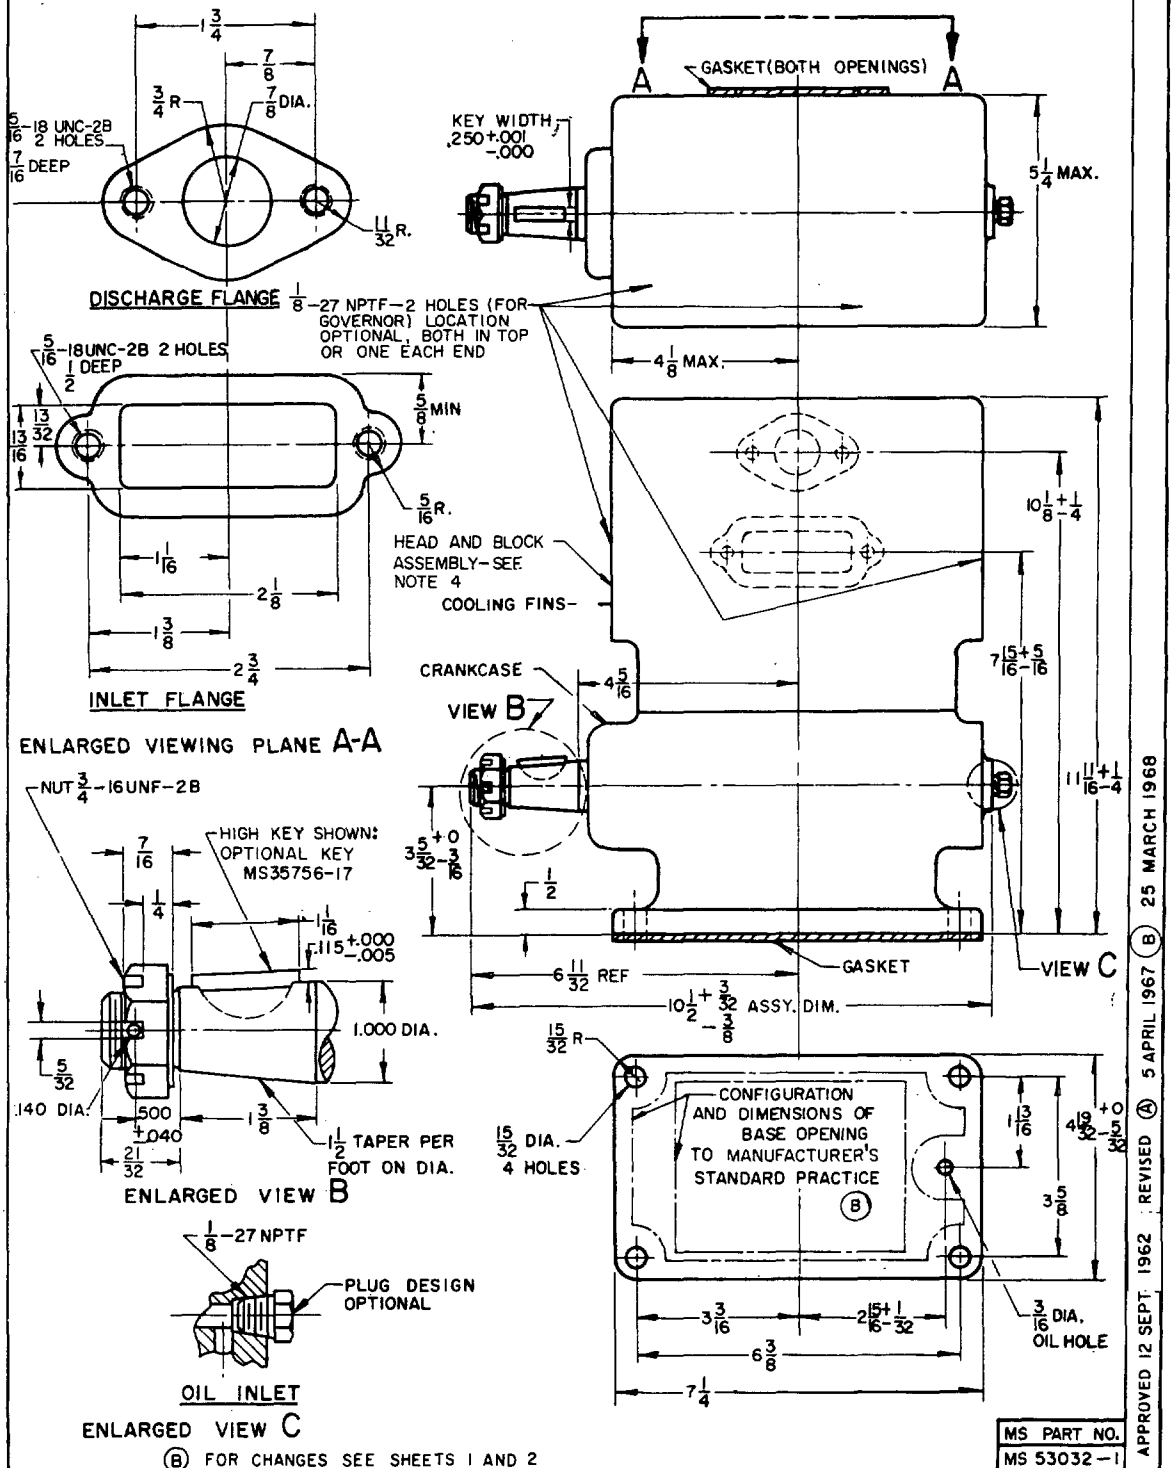

REVIEW ACTIVITY: AF-85 •
USER ACTIVITIES: ARMY-ME; NAVY-MC, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 12 SEPT. 1962 : REVISED (A) 5 APRIL 1967 (B) 25 MARCH 1968

(B) FOR CHANGES SEE SHEETS 1 AND 2

MS PART NO.
MS 53032-1

P.A. ARMY—AT Other Cust AF—84	TITLE COMPRESSOR, RECIPROCATING, POWER DRIVEN: AIR COOLED, 12 C.F.M. W/ UNLOADER	MILITARY STANDARD MS53032
PROCUREMENT SPECIFICATION MIL-C-45334	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

(B)

NOTES:

1. THIS COMPRESSOR SHALL CONFORM TO MIL-C-45334, TYPE II.
2. RECOMMENDED MAXIMUM OPERATING SPEED 2400 RPM.
3. MAXIMUM BUILD-UP TIME TO PUMP A 1000 CU. IN. RESERVOIR TO 100 PSIG:
   21 SECONDS - AT COMPRESSOR SPEED OF 2400 RPM.
   33 SECONDS - AT COMPRESSOR SPEED OF 1200 RPM.
4. COMPRESSOR SHALL BE CONSTRUCTED TO ALLOW 180° ROTATION OF THE HEAD AND BLOCK ASSEMBLY TO PROVIDE FOR RIGHT OR LEFT LOCATION OF THE INLET AND DISCHARGE FLANGES. MANUFACTURER SHALL FURNISH AN INSTRUCTION SHEET, TOGETHER WITH A SPARE GASKET FOR EACH COMPRESSOR.
5. MAXIMUM WEIGHT: 37 POUNDS.
6. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 ON FRACTIONS, ± .005 ON DECIMALS, ± 1° ON ANGLES, ± 1/16 ON CASTINGS.
7. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H28.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON, BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
11. MARKING SHALL CONSIST OF THE MS PART NUMBER, MANUFACTURER'S IDENTIFICATION AND SERIAL NUMBER IN ACCORDANCE WITH MIL-STD-130.

APPROVED 12 SEPT 1962 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2 (B) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust AF-84	TITLE COMPRESSOR, RECIPROCATING, POWER DRIVEN: AIR COOLED, 12 C.F.M. W/UNLOADER	MILITARY STANDARD MS53032
PROCUREMENT SPECIFICATION MIL-C-45334	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.