
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing)
AF #11, 85, 17 @ 19, 14 Army #EL, MU
Navy #WP, SH @ MC


FED SUP CLASS
5950

CASE, MOUNTING, TERMINAL ARRANGEMENT, AND MARKING

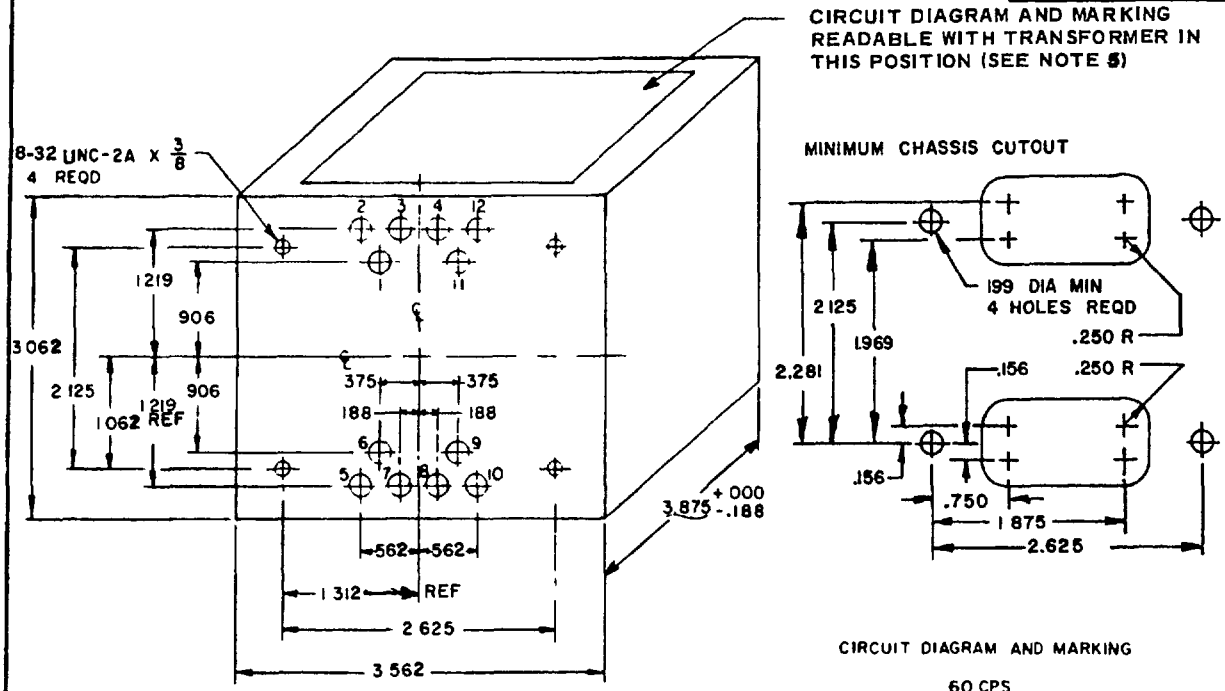

INCHES	MM	INCHES	MM
.156	3.96	1.312	33.32
.188	4.78	1.875	47.63
.199	5.05	1.969	50.01
.250	6.35	2.125	53.98
.375	9.53	2.281	57.94
.562	14.27	2.625	66.68
.750	19.05	3.062	77.77
.906	23.01	3.562	90.47
1.062	26.97	3.875	98.43
1.219	30.96	3/8	9.53

CIRCUIT DIAGRAM AND MARKING

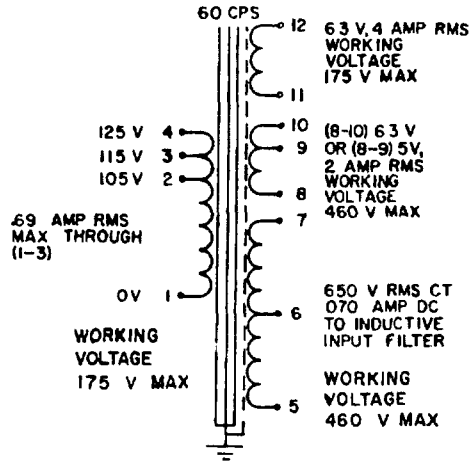

MAX ALTITUDE 10,000 FT

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 28 MAY 1981
NO SUPERSEDING STANDARD

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified, tolerance on overall case dimensions is +.000 (.00 mm), -.125 (3.18 mm).
3. Tolerance on mounting dimensions is ±.016 (.41 mm). Mounting studs are symmetrically located with respect to the centerlines of the case.
4. Tolerance on terminal positioning dimensions is ±.125 (3.18 mm). Terminals fit within minimum chassis cutout.
5. Type designation, MS part no. and manufacturer's name or code symbol to be marked on side opposite terminals.
6. Referenced document shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement document referenced herein.
8. Metric equivalents (to the nearest .01 mm) are shown for general information only and are based upon 1 inch = 25.4 mm.

MS PART NO.	MS90027-2

Ⓖ ENTIRE STANDARD REVISED

APPROVED 2 OCT 1952 REVISED Ⓖ 20 MAY 1982

P.A. Army-ER Other Cust Navy-EC Air Force-85	TITLE TRANSFORMER, POWER, STEP-DOWN AND STEP-UP, TYPE TF4RX03JB002	MILITARY STANDARD MS 90027
Procurement Specification MIL-T-27	SUPERSEDES	PAGE 1 OF 2

DD FORM 25 OCT 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5950-0604-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - ER; Navy - EC; Air Force - 85
Review activities: Army - EL, MU; Navy - OWP, SH@MC; Air Force - 11, 85, 17@19, 14

APPROVED 2 OCT 1952
REVISED (F) 28 MAY 81 (G) SEE PG. 2 FOR CHANGES 20 MAY 1982

ECTRICAL RATING	FED SUP CLASS 5950

105/115/125 v, 60 cps, ±10%
650 v rms ct, 0 070 amp dc to inductive input filter with full-wave rectifier
6 3/5 v, 2 amp
6.3 v, 4 amp

Working voltage
(1-4) - - - - - - - - - - 175 v max
(5-7) - - - - - - - - - - 460 v max
(8-10) - - - - - - - - - - 460 v max
(11-12) - - - - - - - - - - 175 v max
Primary current (1-3) - 0 69 amp rms max
Duty cycle - - - - - - - - Continuous
Life expectancy - - - - - 10,000 hr min
Altitude - - - - - - - - - 10,000 ft min
Operating temperature - 105° C max

entheses, eg (1-4), are used, they indicate the winding and the the winding

SICAL CHARACTERISTICS	
- - - - - - - - - -	JB
- - - - - - - - - -	6 lb max
- - - - - - - - - -	Solder lug No 18 AWG
- - - - - - - - - -	438(11 13 mm) +.000(.00 mm) -.219(5 56 mm)
- - - - - - - - - -	Method I, test condition C (50 G)

ECTRICAL PROPERTIES					LIMITS
D	-4)	(5-7)	(8-10)	(11-12)	
	500	2,300	1,500	1 500	
) cps across (1-3)					
1-3) 0 265 amp rms					Max
-3) 3 6 w					Max
oss (5-7) 708 v					Max
)-6) and (6-7) 2%					Max
oss (8-9) 5 47 v					Max
oss (8-10) 6 8 v					Max
oss (11-12) 6 97 v					Max
oss (1-2) 105 v					±1%
oss (1-4) 125 v					±1%
0 cps across (1-2), and (5-7) loaded with full-wave rectifier and 0.070 amp dc into 5 h put filter and rated current in (8-10) and					
oss (5-7) 650 v					±4%
oss (8-10) 6 3 v					±2%
oss (11-12) 6 3 v					-2%
5 to 1 at 20 kc					Min
terminals 4 and 5, 7 and 8, and 10 and 11					- - -
v 54 cps across (1-2), and (5-7) N-5R4WGB full-wave rectifier and 0.070 amp dc tive input filter and rated current in -12) at an ambient temperature of 65° C					Max

PROVISIONS:
ECTION: NOT APPLICABLE FOR THIS SPECIFICATION

NCE INSPECTION: GROUP A AND B TESTS L BE APPLICABLE.

P A FORMER, POWER, STEP-DOWN Othe EP-UP, TYPE TF4RX03JB002 Air	MILITARY STANDARD MS 90027
Practices	PAGE 2 OF 2

DD ITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:31Z
Check the source to verify that this is the current version before use.