
MS9460

FED SUP CLASS 5320

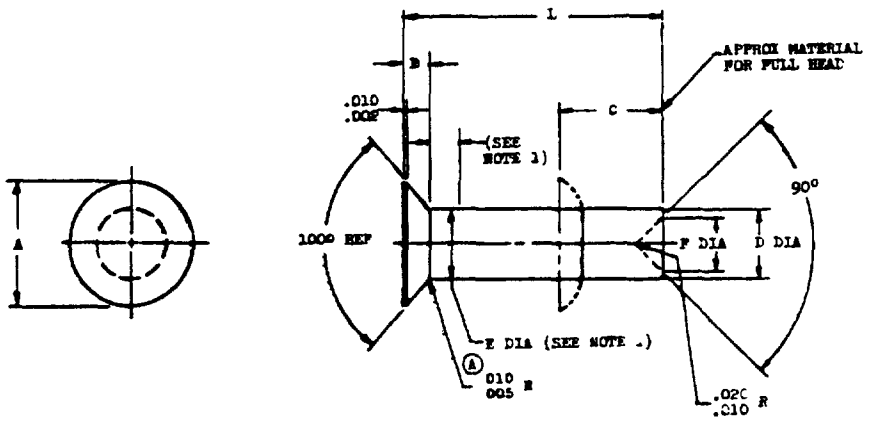

NOMINAL SIZE	A	B +.001 -.003	C	D	E	F ±.005	(2) S
062	099 - 107	.022	094	061 - 063	061 - 064	NO RECESS	010
.094	164 - 172	.036	.141	093 - 095	.093 - 096	NO RECESS	010
.125	2.0 - .2.8	.042	.188	.123 - .126	123 - .128	070	010
.156	.272 - .280	.055	.234	.54 - ..57	.154 - .159	080	.015
.188	.337 - .347	.070	.281	186 - 189	.186 - 191	.100	.015
.250	.460 - .470	.095	.375	.248 - .252	.248 - .254	.125	020
.312	548 - .558	.106	.469	.310 - .314	.310 - 3.6	..50	.020
.375	.678 - .688	.134	.562	.373 - .377	.373 - .379	180	020

1. DISTANCE .060 FOR LENGTHS .188 AND SHORTER AND .100 FOR LENGTHS LONGER THAN ..88
2. A DIA MUST BE CONCENTRIC WITH C DIA WITHIN S FULL INDICATOR READING
3. MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 7235
4. REMOVE BURRS AND BREAK SHARP EDGES .000 - .015
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES; LINEAR DIMENSIONS ±.0.0 ANGULAR DIMENSIONS ±5°
6. IDENTIFICATION MARK MS9460-XXX AND MANUFACTURER'S IDENTIFICATION ON CONTAINER
7. DO NOT USE UNASSIGNED PART NUMBERS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS WHICH CONFLICT. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

AMS IS A SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATION

(A) FOR CHANGES SEE SHEETS 2 &

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER MILITARY PANEL COMMITTEE OF THE SAE

User activities: Army - MD, Navy - MC, Air Force - DSA -

Review activities: Army -, Navy -, Air Force - 82, DSA -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Suggested for all new engineering and design applications and for revision when use shall be made from this document

APPROVED 1 Jul 51 REVISED (A) 27 Jun 74

P.A. USAF - 11 (A) Other Cust Army - AV Navy - AS

TITLE: RIVET, SOLID - 100° FLUSH HEAD, AMS 7235

MILITARY STANDARD

MS 9460

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

SHEET 1 OF 2

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5320-0230

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.

MS9460

Review activities
Army - MI
Navy -
Air Force - 82
DLA - CS

User activities
Army - ME
Navy - MO
Air Force -
DLA -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
5320

NOM SIZE		.062		.094		.125		.156		.188		.250		.312		.375	
	L	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100	PART NO.	APPROX WEIGHT LB/100
	.125	MS9460-002	.01														
	.156	MS9460-003	.02														
	.188	MS9460-004	.02	MS9460-050	.05												
	.219	MS9460-005	.02	MS9460-051	.06												
	.250	MS9460-006	.03	MS9460-052	.06	MS9460-098	.12										
	.281	MS9460-007	.03	MS9460-053	.07	MS9460-099	.13										
	.312	MS9460-008	.03	MS9460-054	.08	MS9460-100	.14	MS9460-146	.22								
	.344	MS9460-009	.03	MS9460-055	.08	MS9460-101	.15	MS9460-147	.24								
	.375	MS9460-010	.04	MS9460-056	.09	MS9460 102	.17	MS9460 148	.26	MS9460 194	.40						
	.406	MS9460-011	.04	MS9460-057	.10	MS9460-103	.18	MS9460 149	.28	MS9460-195	.43						
	.438	MS9460-012	.04	MS9460-058	.10	MS9460-104	.19	MS9460-150	.31	MS9460-196	.45						
	.469	MS9460-013	.05	MS9460-059	.11	MS9460-105	.20	MS9460-151	.32	MS9460-197	.48						
	.500	MS9460-014	.05	MS9460-060	.12	MS9460-106	.21	MS9460-152	.34	MS9460-198	.51	MS9460-244	.96				
	.531	MS9460-015	.05	MS9460-061	.12	MS9460-107	.23	MS9460-153	.36	MS9460-199	.54	MS9460-245	1.01				
	.562	MS9460-016	.06	MS9460-062	.13	MS9460-108	.24	MS9460-154	.38	MS9460-200	.57	MS9460-246	1.06				
	.594	MS9460-017	.06	MS9460-063	.14	MS9460-109	.25	MS9460 155	.40	MS9460-201	.60	MS9460-247	1.11				
	.625	MS9460-018	.06	MS9460-064	.14	MS9460-110	.27	MS9460-156	.42	MS9460-202	.62	MS9460-248	1.16	MS9460-294	1.80		
	.656			MS9460-065	.15	MS9460-111	.28	MS9460-157	.44	MS9460-203	.65	MS9460-249	1.21	MS9460-295	1.88		
	.688			MS9460-066	.16	MS9460-112	.29	MS9460-158	.46	MS9460-204	.68	MS9460-250	1.26	MS9460-296	1.96		
	.719			MS9460-067	.16	MS9460-113	.30	MS9460-159	.48	MS9460-205	.71	MS9460-251	1.31	MS9460-297	2.04		
	.750	MS9460-068	.17	MS9460-114	.31	MS9460-160	.50	MS9460-206	.74	MS9460-252	1.36	MS9460-298	2.12	MS9460-344	3.18
	.812	MS9460-070	.18	MS9460-116	.34	MS9460 162	.53	MS9460-208	.79	MS9460 254	1.46	MS9460 300	2.27	MS9460 346	3.40
	.875	MS9460-072	.20	MS9460-118	.37	MS9460-164	.57	MS9460-210	.85	MS9460-256	1.56	MS9460 302	2.43	MS9460-348	3.62
	.938	MS9460-074	.21	MS9460-120	.39	MS9460 166	.62	MS9460-212	.90	MS9460 258	1.66	MS9460 304	2.59	MS9460 350	3.85
	1.000	MS9460-076	.22	MS9460-122	.41	MS9460-168	.65	MS9460 214	.96	MS9460 260	1.76	MS9460-306	2.74	MS9460 352	4.08
	1.062			MS9460-124	.44	MS9460 170	.69	MS9460 216	1.02	MS9460 262	1.86	MS9460-308	2.90	MS9460 354	4.30
	1.125			MS9460-126	.46	MS9460-172	.73	MS9460 218	1.07	MS9460 264	1.96	MS9460-310	3.05	MS9460 356	4.53
	1.188			MS9460-128	.49	MS9460-174	.77	MS9460-220	1.13	MS9460 266	2.06	MS9460-312	3.22	MS9460 358	4.75
	1.250			MS9460-130	.51	MS9460 176	.80	MS9460 222	1.19	MS9460 268	2.16	MS9460-314	3.37	MS9460 360	4.98
	1.312			MS9460 132	.54	MS9460 178	.84	MS9460 224	1.24	MS9460 270	2.26	MS9460-316	3.52	MS9460-362	5.20
	1.375			MS9460-134	.56	MS9460 180	.88	MS9460 226	1.30	MS9460-272	2.36	MS9460 318	3.68	MS9460-364	5.44
	1.438			MS9460-136	.59	MS9460 182	.92	MS9460-228	1.35	MS9460 274	2.43	MS9460 320	3.84	MS9460 366	5.66
	1.500			MS9460 138	.61	MS9460 184	.96	MS9460 230	1.41	MS9460 276	2.57	MS9460-322	3.99	MS9460 368	5.87

AMS IS A SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 5 Jul 63 REVISED (A) FOR CHANGES SEE SHEETS 1 & 2

P.A. USAF - 11 (A)
Other Cust Army - AV Navy - AS

TITLE
RIVET, SOLID - 100° FLUSH HEAD, AMS 7235

MILITARY STANDARD
MS9460

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5320-0230

☆U S GOVERNMENT PRINTING OFFICE 1974-603-109/1174

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.