INCH-POUND

MS28753C
2 November 1999
SUPERSEDING
MS28753 Rev B
24 January 1986

DETAIL SPECIFICATION SHEET

# FITTING END, SELF-SEALING FUEL HOSE, SWIVEL, DETACHABLE, FLANGED, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

TABLE I. Dimensions.

| Fitting End Part No. | Tubing/ Hose Size NOM (REF) | Flange Part No. | A Max | B Max | C Min | D Max | E +.000 -.005 |
|---|---|---|---|---|---|---|---|
| MS28753D16 | 1 | MS20756D16 | 3.141 | 2.000 | .813 | 1.953 | .156 |
| MS28753D20 | 1 1/4 | MS20756D20 | 3.141 | 2.000 | 1.047 | 2.313 | .156 |
| MS28753D24 | 1 1/2 | MS20756D24 | 3.078 | 2.000 | 1.281 | 2.563 | .188 |
| MS28753D32 | 2 | MS20756D32 | 3.500 | 2.250 | 1.750 | 3.125 | .188 |
| MS28753D40 | 2 1/2 | MS20756D40 | 3.891 | 2.500 | 2.250 | 3.625 | .188 |
| MS28753D48 | 3 | MS20756D48 | 3.891 | 2.500 | 2.875 | 4.438 | .188 |

TABLE I. Dimensions -continued.

| Fitting End Part No. | F +.000 -.005 | G Max | H Min | J Min | Weight Lb (Approx) |
|---|---|---|---|---|---|
| MS28753D16 | 1.500 | 1.188 | .375 | 1.343 | .261 |
| MS28753D20 | 1.844 | 1.500 | .500 | 1.656 | .299 |
| MS28753D24 | 2.125 | 1.750 | .500 | 1.906 | .305 |
| MS28753D32 | 2.750 | 2.375 | .625 | 2.531 | .325 |
| MS28753D40 | 3.281 | 2.875 | 1.000 | 3.031 | .607 |
| MS28753D48 | 3.781 | 3.375 | 1.250 | 3.250 | .954 |



AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

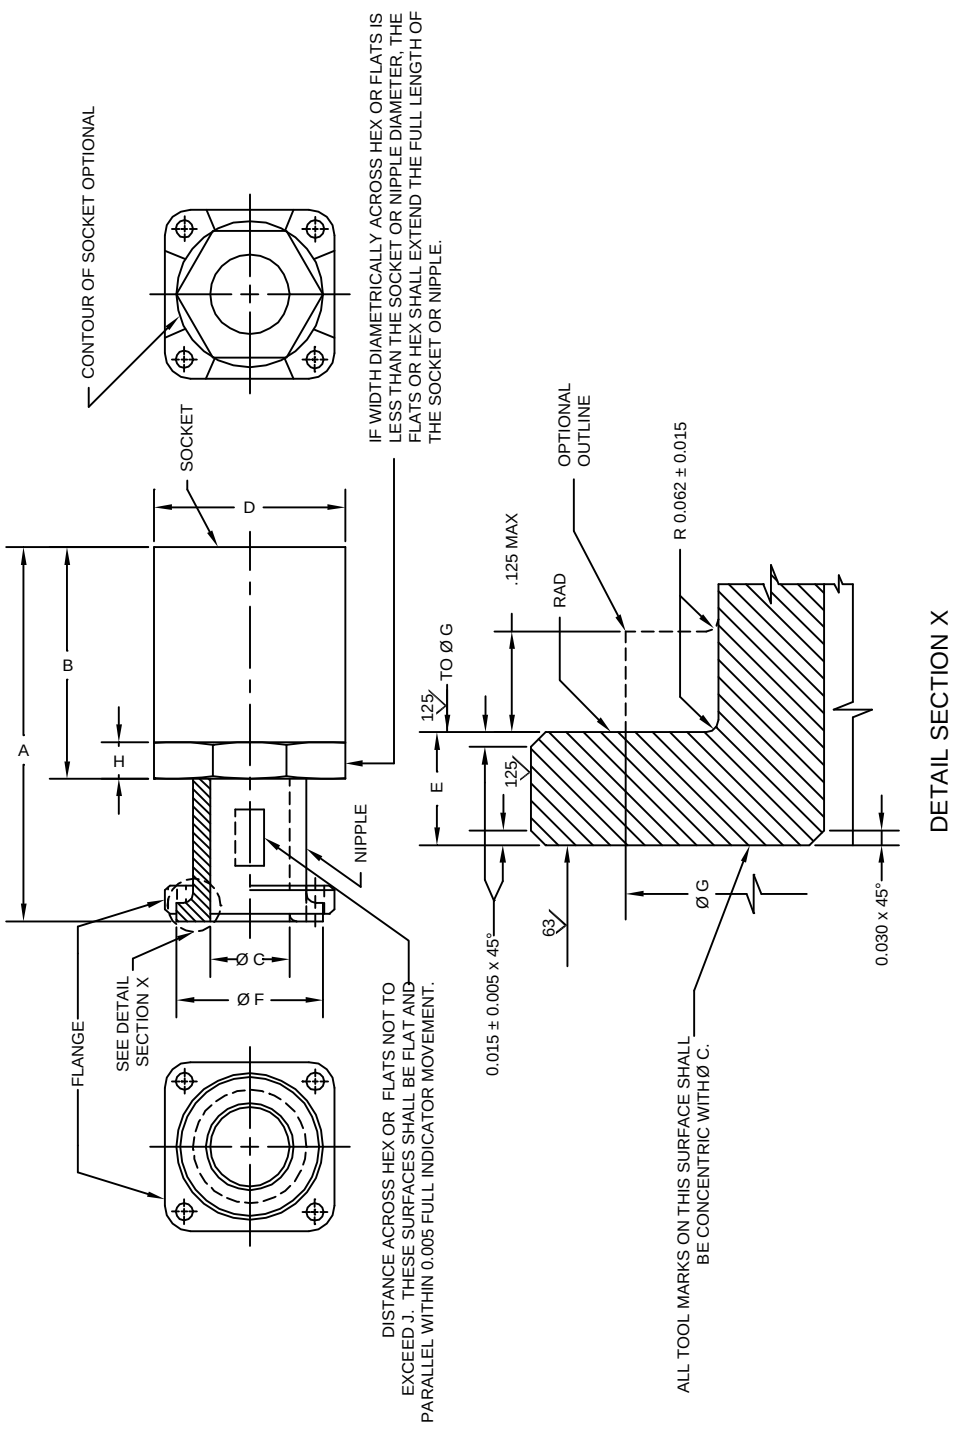


FIGURE 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Aluminum alloy.

2. Hex or flats shall fit standard wrench openings.

3. C, F and G shall be concentric within .010 full indicator movement.

4. Surface roughness shall be in accordance with ASME B46.1.

5. Fittings shall be permanently marked with the applicable MS part number on an unfinished surface of the nipple.

6. Remove all burrs and sharp edges. The interior surface of the fitting shall be smooth and free from projections.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ± .010; angles ± 1°.

2. Hex flange MS20756 not shown.

3. Part number: Example of military part number: MS28753D16




Custodian:
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0905)

Review activity:
Air Force - 82

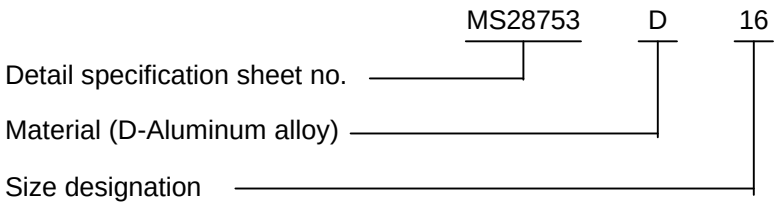

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.