NOTICE OF
REINSTATEMENT

INCH-POUND

MIL-C-29184/2B
NOTICE 2
16 April 2001
SUPERSEDING
NOTICE 1
5 May 1998

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE II, CLASS 1, 100 AMPERE

MIL-C-29184/2B, dated 9 December 1991, is hereby reinstated as inactive for new design.

Custodians:
Army - CR4
Navy - MC
Air Force - 99

Preparing activity:
DLA - GS2

(Project 6150-0316-02)

Reviewers:
Navy - MS
Air Force - 80

AMSC N/A

FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

MIL-C-29184/2B is inactive for new design as of 16 April 2001.

INCH-POUND

MIL-C-29184/2B
9 December 1991
SUPERSEDING
MIL-C-29184/2A
3 December 1984

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE II, CLASS 1, 100 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-29184.

REQUIREMENTS:

Physical: Design and construction - see figure 1 and table I.
Overall length - 50 feet, measured from the outside front edge of each connector housing with covers off.

Electrical: Power - 208Y/120 volt, 3-phase, 4-pole, 5-wire.
Ampacity - 100 amperes.
Cable to connector wiring - see table II.

PIN: M29184/2.

FSC 6150

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly components.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 100 amperes, straight plug connector.	MS90556C44412P
2	1	MIL-C-22992, class L, 100 amperes, cable connecting receptacle connector, without coupling ring.	MS90557C44412S
3	1	Protective cover (plug type) for item 1.	MS90564-7C
4	1	Protective cover (cap type) for item 2.	MS90563-7C
5	2	Cable strain relief grip.	MS90561-15
5A	2	Cable sealing gland for use with item 5.	MS23747-15
6	1	Portable power cable, NEMA type G, 4 conductor, No. 2 AWG, with not less than 259 strands per conductor; 4 grounding conductors, No. 9 AWG, with not less than 49 strands per conductor.	
7	2	Marking bands.	

TABLE II. Cable wire termination.

Conductor Color	Phase	Terminal Identification
Black	A	A
Red	B	B
Orange or blue	C	C
White	Neutral	N
Green or bare	Ground	G*

*The four ground wires shall be connected to terminals G1, G2, G3 and G4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

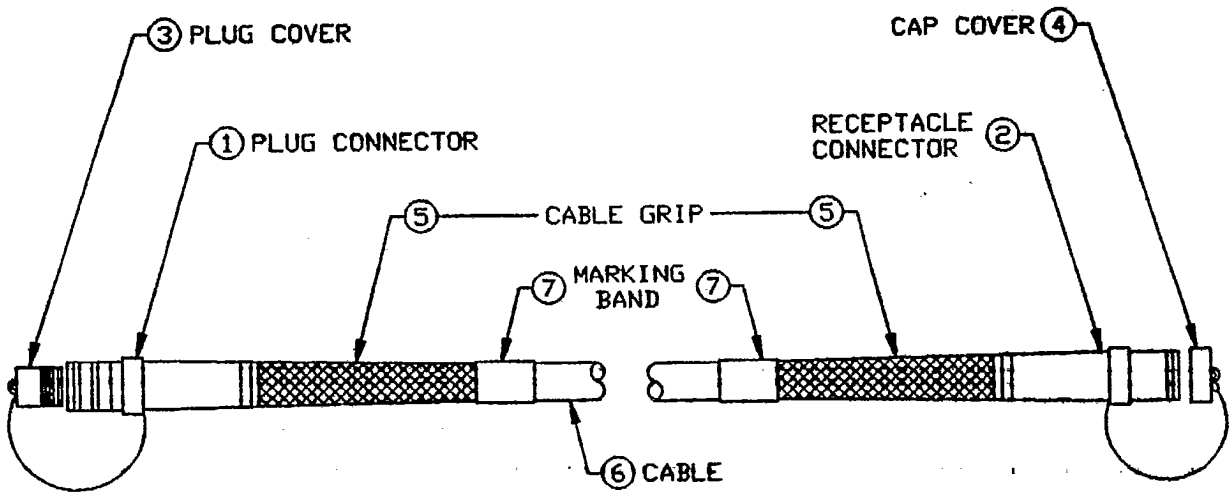


FIGURE 1. Cable assembly functional components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Preparing Activity:
Navy - YD

(Project 6150-0207)

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.