MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE II, CLASS 1, 30 AMPERE

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring cable assemblies described herein shall consist of this specification and the latest issue of MIL-C-29184.

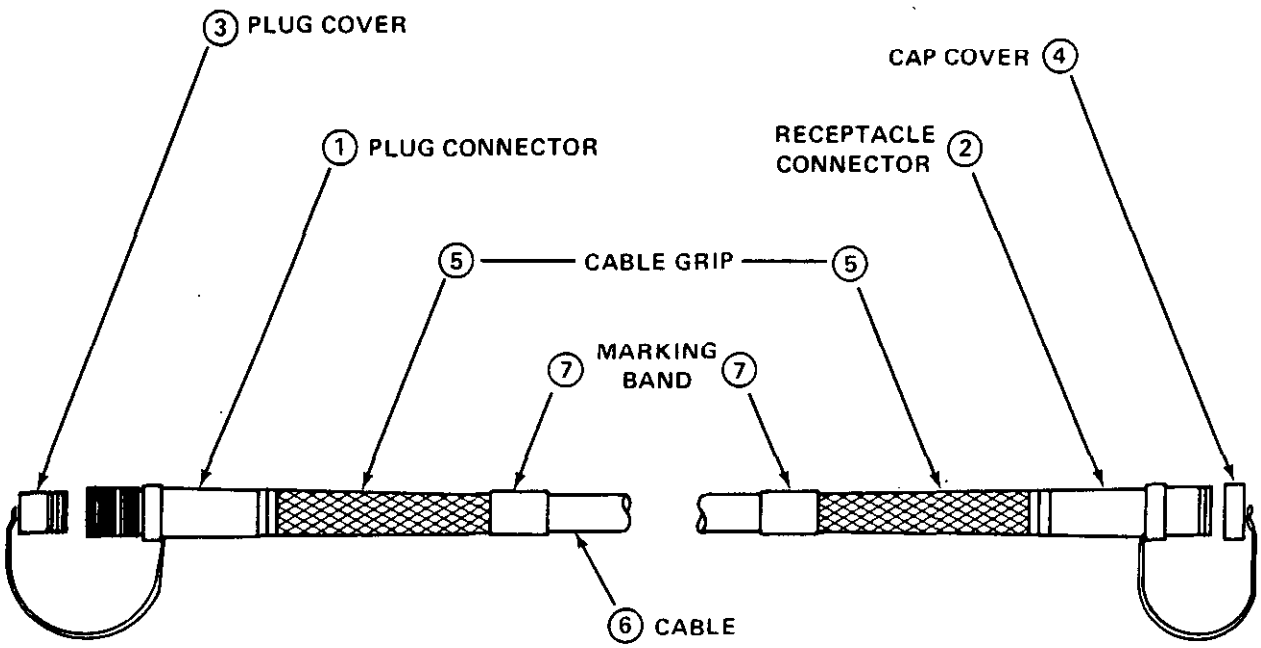


FIGURE 1. Cable assembly functional components.

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Physical:

Design and construction - See figure 1 and table I.
Overall length - See table II. Length is measured from the outside front edge of each connector housing with covers off.

Electrical:

Power - 208Y/120 volt, 3 phase, 4 pole, 5 wire.
Ampacity - 28 amperes, NFPA No. 70 rating.
45 amperes, NEMA WC 8 rating.
Cable to connector wiring - See table III.

Government part number - M29184/4 - (dash number from table II).
Government-furnished equipment - Items 1 through 5A of table I.

TABLE I. Cable assembly components.

Item	Quantity	Description	Military part number (if applicable)
1	1	MIL-C-22992, class L, 40 amperes straight plug connector.	MS90556C28412P
2	1	MIL-C-22992, class L, 40 amperes cable connecting receptacle connector without coupling ring.	MS90557C28412S
* 3	1	Protective cover (plug type) for item 1.	MS90564-1C
* 4	1	Protective cover (cap type) for item 2.	MS90563-1C
5	2	Cable strain relief grip.	MS90561-2
* 5A	2	Cable sealing gland for use with item 5.	MS23747-12
6	1	Portable power cable, NEMA type G, 4 conductor, No. 8 AWG with not less than 133 strands per conductor and 4 grounding conductors, No. 12 AWG with not less than 19 strands per conductor.	
7	2	Marking bands.	

*These items should be supplied as part of items 1 or 2, as applicable, when items 1 or 2 are procured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers.

Dash Number	Description
01	Cable assembly, 50 feet overall length.
02	Cable assembly, 100 feet overall length.

TABLE III. Cable wire termination.

Conductor Color	Phase	Terminal Identification
Black	A	A
Red	B	B
Orange	C	C
White	Neutral	N
Green or bare	Ground	G(1)

(1) The four grounding wires shall be connected to terminal G.

Custodian:
Navy - YD

Preparing Activity:
Navy - YD

Review Activity:
Navy - MC, Fleet Hospital Support Office

(Project 6150-N187)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:02Z
Check the source to verify that this is the current version before use.