MIL-C-29184/5B is inactive for new design as of 16 April 2001.

INCH-POUND

MIL-C-29184/5B
9 December 1991
SUPERSEDING
MIL-C-29184/5A
3 December 1984

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE II, CLASS 1, 20 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-29184.

REQUIREMENTS:

Physical: Design and construction - See figure 1 and table I.
Overall length - See table II. Length is measured from the front edge of each connector housing with covers off.

Electrical: Power - 208Y/120 volt, 3-phase, 4-pole, 5-wire.
Ampacity - 20 amperes.
Cable to connector wiring - See table III.

PIN: M29184/5-(dash number from table II).

Finish: Nonconductive finish (designated by N in military part number) shall be supplied.

AMSC N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly components and accessories.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class R, straight plug connector, with pin contacts.	MS17344R24N10P
2	1	MIL-C-22992, class R, straight plug connector, with socket contacts.	MS17344R24N10S
3	2	MIL-C-22992, class R, straight through cable sealing adapter (includes cable grip and captive protective cover with chain for items 1 or 2).	MS90571N16A
4	2	Captive protective cover (plug) for items 1 and 2 (included as part of item 3).	
5	1	Cable strain relief grip (included as part of item 3).	
6	-	Straight plug connector adapter for joining two cable assemblies. One side shall mate with item 1 and the other side shall mate with item 2. Item 6 is an accessory and should be separate (see table II).	
7	1	Portable control cable, NFPA 70, type SO, 5 conductor, No. 10 AWG, with not less than 105 strands per conductor.	
8	2	Marking bands.	

TABLE II. Dash numbers.

Dash Number	Description
01	Cable assembly, 50 feet overall length.
02	Cable assembly, 100 feet overall length.
03	Straight plug connector adapter for joining two cable assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.

TABLE III. Cable wire termination.

Conductor Color	Phase	Terminal Identification
Black	A	F
Red	B	B
Orange or blue	C	E
White	Neutral	A
Green or bare	Ground	C

Note: Terminals D and G are not used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.

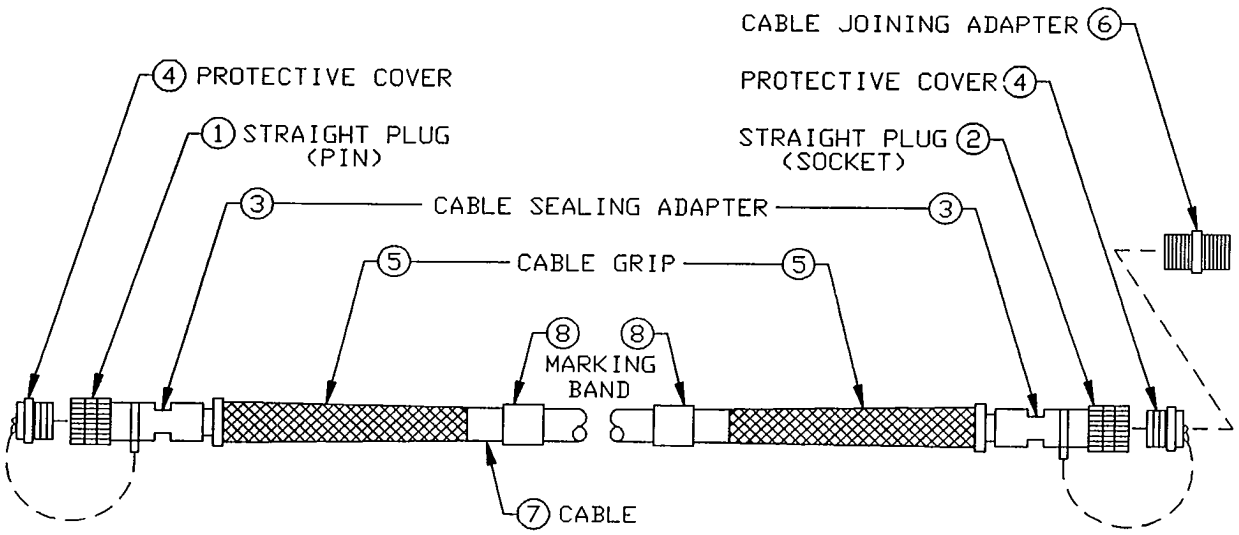


FIGURE 1. Cable assembly functional components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ME
Air Force - 99
Navy - YD

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy: YD

(Project 6150-0210)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.