MIL-C-29184/6A(NAVY)
3 December 1984
SUPERSEDING
MIL-C-29184/6
15 December 1979

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE II, CLASS 2, 20 AMPERE

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring cable assemblies described herein shall consist of this specification and the latest issue of MIL-C-29184.

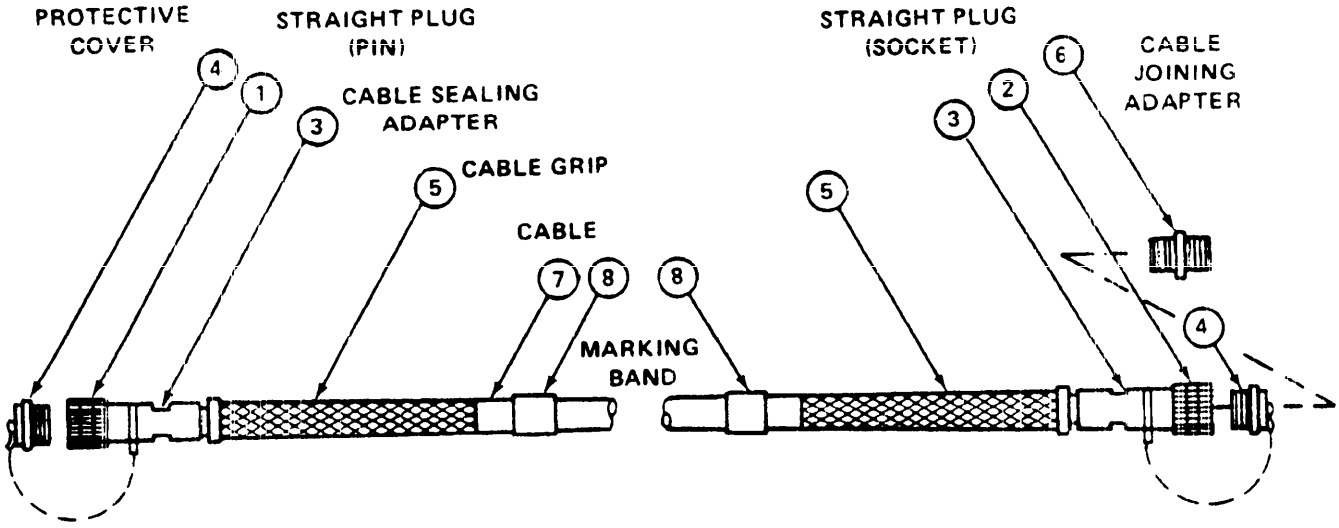


FIGURE 1. Cable assembly functional components.

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:03Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Physical:

Design and construction - See figure 1 and table I.
Overall length - See table II. Length is measured from the outside front edge of each connector housing with covers off.

Electrical:

Power - 208Y/120 volt, single phase, 2 pole, 3 wire.
Ampacity - 20 amperes.
Cable to connector wiring - See table III.

Government part number - M29184/6 - (dash number from table II).
Government-furnished equipment - Items 1 through 3 of table I. Nonconductive finish (designated by N in military part number) shall be supplied.

TABLE I. Cable assembly components and accessories.

Item	Quantity	Description	Military part number (if applicable)
1	1	MIL-C-22992, class R, straight plug connector with pin contacts.	MS17344R22N2P
2	1	MIL-C-22992, class R, straight plug connector with socket contacts.	MS17344R22N2S
3	2	MIL-C-22992, class R, straight through cable sealing adapter (includes cable grip and captive protective cover with chain for item 1 or 2).	MS90571N13A
4	2	Captive protective cover (plug) with chain for items 1 and 2 (included as part of item 3).	
5	1	Cable strain relief grip (included as part of item 3).	
6	-	Straight plug connector adapter for joining two cable assemblies. One side shall mate with item 1 and the other side shall mate with item 2. Item 6 is an accessory and should be ordered separately (see table II).	
7	1	Portable control cable, NFPA No. 70, type SO, 3 conductor, No. 10 AWG with not less than 105 strands per conductor.	
8	2	Marking bands.	

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:03Z
Check the source to verify that this is the currentversion before use.

TABLE II. Dash numbers.

Dash Number	Description
01	Cable assembly, 50 feet overall length.
02	Cable assembly, 100 feet overall length.
03	Straight plug connector adapter for joining two cable assemblies.

TABLE III. Cable terminal-color designation.

Conductor Color	Terminal Identification
Black	B
White	C
Green or bare	A

Custodian:
Navy - YD

Preparing Activity:
Navy - YD

Review Activity:
Navy - MC, Fleet Hospital Support Office

(Project 6150-N189)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:03Z
Check the source to verify that this is the current version before use.