MIL-C-29184/8B is inactive for new design as of 16 April 2001.

INCH-POUND

MIL-C-29184/8B
9 December 1991
SUPERSEDING
MIL-C-29184/8A
3 December 1984

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, POWER, ELECTRICAL, FOR PORTABLE PANELBOARDS: TYPE IV, CLASS 1, 60 AMPERE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-29184.

REQUIREMENTS:

Physical: Design and construction - See figure 1 and table I.
Overall length - See table II. Length is measured from the outside front edge of the connector housing with the protective cover off.

Electrical: Power - 208Y/120 volt, 3-phase, 4-pole, 5-wire.
Ampacity - 60 amperes.
Cable to connector wiring - See table III.

PIN: M29184/8-(dash number from table II).

AMSC N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:04Z
Check the source to verify that this is the current version before use.

TABLE I. Cable assembly components and accessories.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 60 amperes, cable connecting receptacle connector, without coupling ring.	MS90557C32412S
2	1	Protective cover (cap type) for item 1.	MS90563-4C
3	1	Cable strain relief grip.	MS90561-2
3A	1	Cable sealing gland for use with item 3.	MS23747-2
4	1	Portable power cable, NEMA type G, 4 conductor, No. 6 AWG, with not less than 259 strands per conductor; 4 grounding conductors, No. 12 AWG, with not less than 19 strands per conductor. The end opposite the connector shall have 8 inches of the outer jacket and 1 inch of insulation removed from each conductor. Bare conductor leads shall be dipped in solder.	
5	2	Marking bands.	

TABLE II. Dash numbers.

Dash Number	Description
01	Cable assembly, 50 feet overall length.
02	Cable assembly, 100 feet overall length.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:04Z
Check the source to verify that this is the current version before use.

TABLE III. Cable wire termination.

Conductor Color	Phase	Terminal Identification
Black	A	A
Red	B	B
Orange or blue	C	C
White	Neutral	N
Green or bare	Ground	G*

*The four ground conductors shall be connected to terminal G.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T22:04Z
Check the source to verify that this is the current version before use.

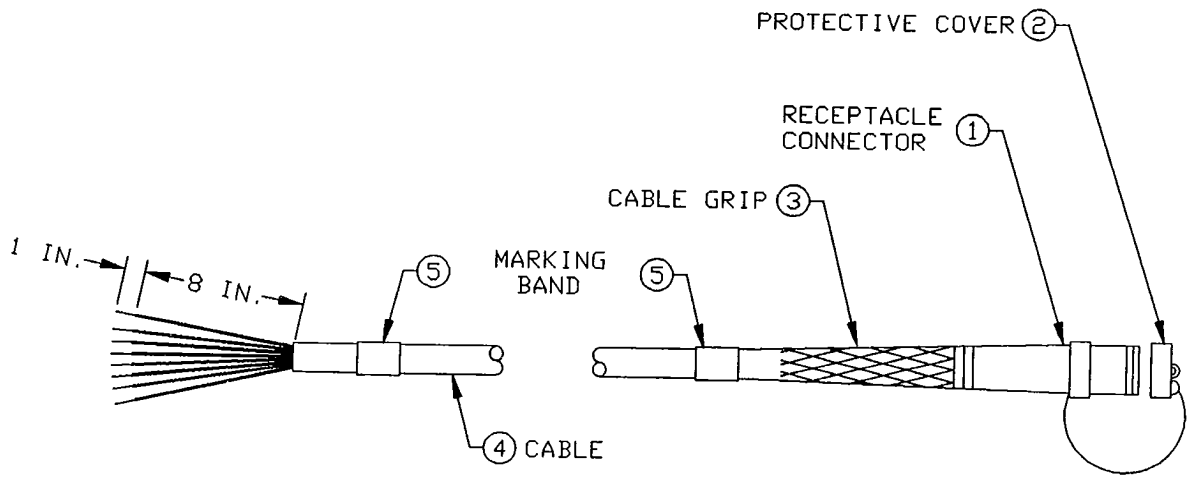


FIGURE 1. Cable assembly functional components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:04Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6150-0211)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:04Z
Check the source to verify that this is the current version before use.