| INCH-POUND |

MIL-P-29183/17
18 June 1990

MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF
TYPE 1, CLASS 1, CONFIGURATION 4: 208Y/120 VOLT, 100 KILOWATT

This specification is approved for use by all departments and Agencies of theDepartment of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-29183B

REQUIREMENTS.

The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Required accessory equipment shall be as specified in table III.

Physical.

Nominal weight: 170 pounds (77 kilograms).
Maximum dimensions: Length: 40 inches (1016 millimeters (mm)).
Width: 32 inches (813 mm), Height: 35 inches (889 mm).
Vertical center of gravity: 20.5 ± 0.5 inches (521 ± 13 mm) above level ground.
Paralleling access panel: Provisions only (see 3.8.5.2.1 of MIL-P-29183).

Electrical.

Input: 208Y/120 volt (V), 3 phase, 4 pole (P), 5 Wire (W), 60 Hertz.
Bus capacity: 225 amperes (A).

Modification capability: Design provisions shall be made to accommodate in the future an additional 3P-400A main breaker and a knockout for 100A, class L input connection (MS90558C44412P).

Government part number - M29183/17

AMSC N/A FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.

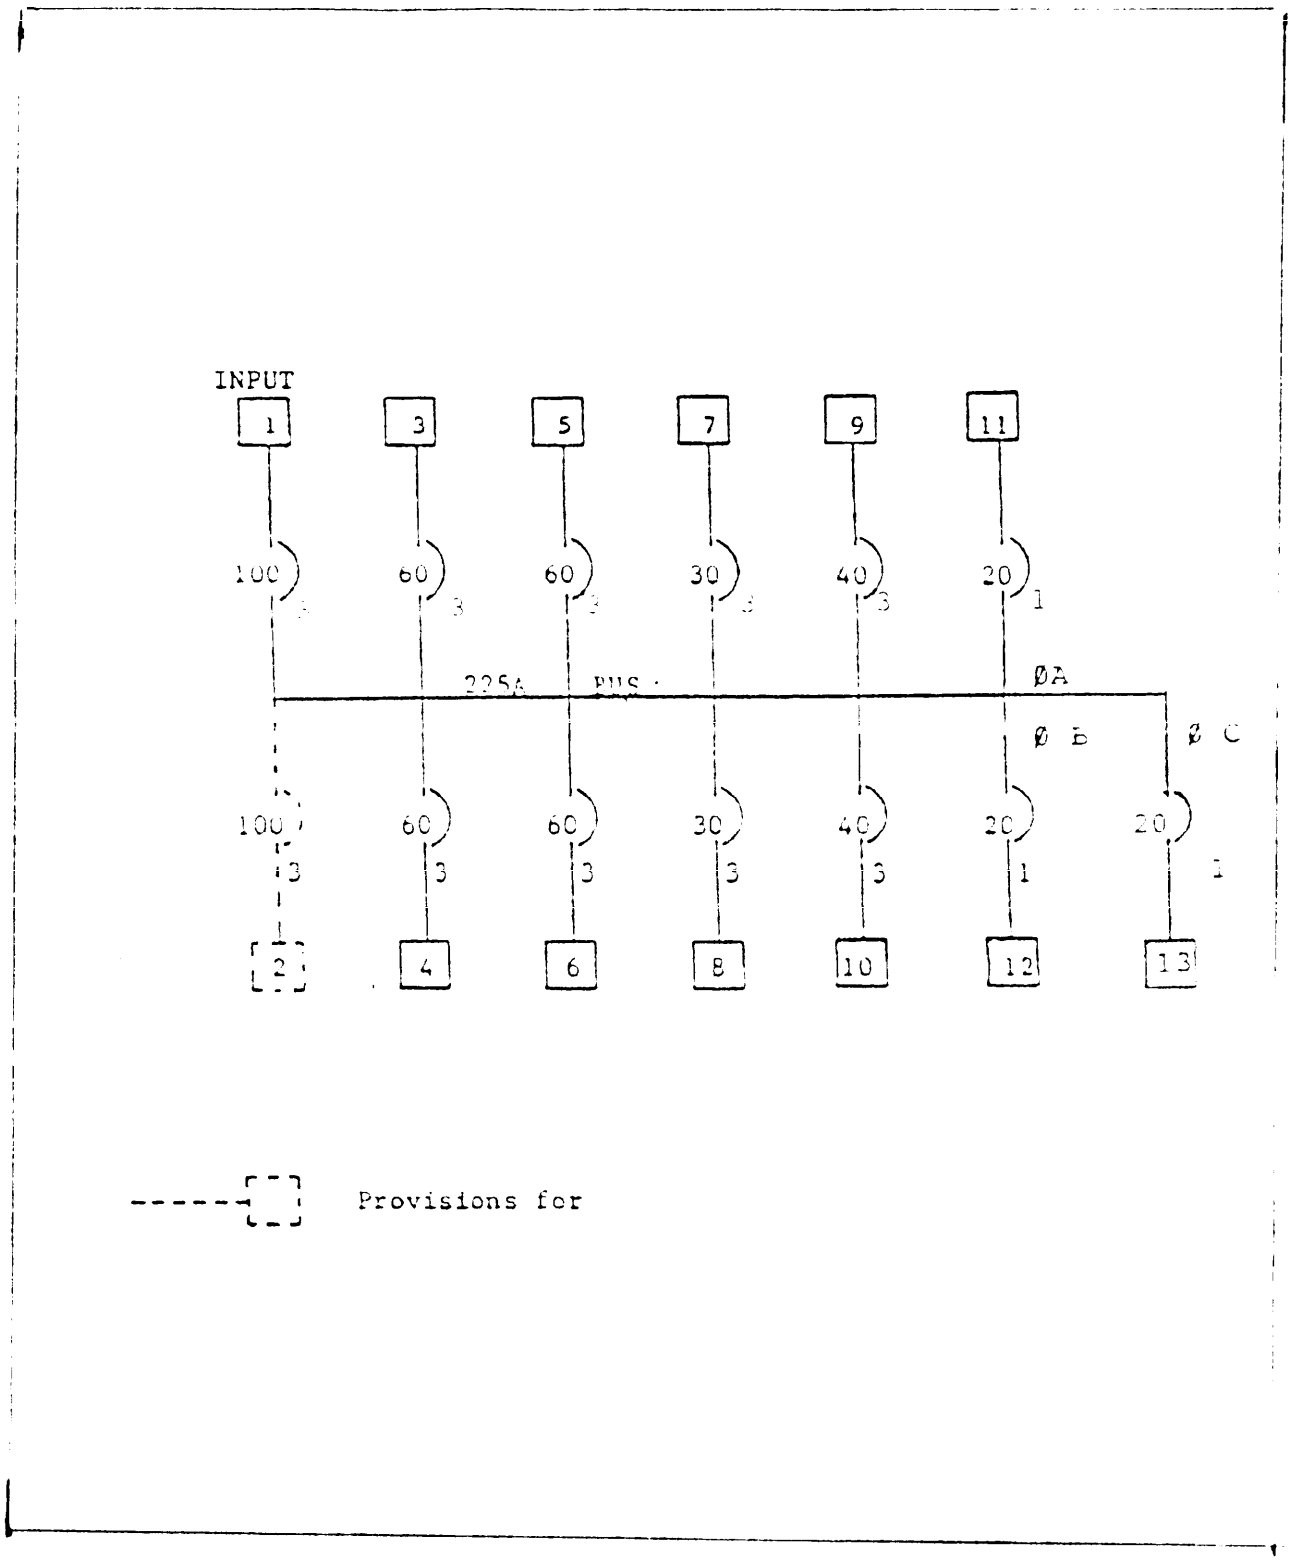


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits characteristics.

Quantity	Circuit breaker Circuit kind	Pole-Ampere (A)	Interface connector	
1	208/120V, 3 phase, 5W	3P-100A (Main)	Input MS90558C44412P	1/
4	208/120V, 3 phase, 5W	3P-60A	MS90555C32412S	1/
2	208/120V, 3 phase, 5W	3P-30A	MS90555C32412S	1/
2	208/120V, 3 phase, 5W	3P-40A	MS90555C32412S	1/
3	120V, 1 phase, 3W	1P-20A GFCI	NEMA L5-20R	2/

1/ Connector designations are military part numbers for military type connectors conforming to MIL-C-22992.

2/ Connector designation conform to NEMA standard

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type	Connector terminal wiring/color code: Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral White wire	Ground green (bare) wire	
1	Input	MS90558C44412P	A	B	C	N	G	1/
3,4,5,6	Branch	MS90555C32412S	A	B	C	N	G	1/
7,8,9,10	Branch	MS90555C32412S	A	B	C	N	G	1/
11	Branch	NEMA L5-20R	3/	-	-	W	G	
12	Branch	NEMA L5-20R	-	3/	-	W	G	
13	Branch	NEMA L5-20R	-	-	3/	W	G	

1/ Connector designations are military part numbers for military type connectors conforming to MIL-C-22992.

2/ Connector designations conform to NEMA standard.

3/ Undesignated terminal.

Source: https://assist.dla.mil -- Downloaded: 202610-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE III. Required accessory equipment.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 100A wall mount plug, with coupling ring, connector.	MS90558C44412P
2	1	Protective cover (cap) for item 1	MS90564-7C
3	8	MIL-C-22992, class L, 60A, wall mount socket, receptacle connector	MS90555C32412S
4	8	Protective cover (cap) for item 3	MS90563-3C
5	3	NEMA L5-20R	NEMA
6	3	Protective receptacle cover for item 5	

Custodians:
Army - ME
Navy - YD
Air Force - 68

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6110-0335-05)

Source: https://assist.dla.mil -- Downloaded: 20260-20T21:59Z
Check the source to verify that this is the current version before use.