| INCH-POUND |

MIL-P-29183/18
18 June 1990

MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF TYPE 1, CLASS 1, CONFIGURATION 4: 208Y/120 VOLT, 200 KILOWATTS

This specification is approved for use by all departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-29183B

REQUIREMENTS. The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Required necessary equipment shall be as specified in table III.

Physical.

Nominal weight: 430 pounds (188 kilograms).
Maximum dimensions: Length: 65 inches (in) (1651 millimeters (mm)).
Width: 32 in (813 mm). Height: 35 in (889 mm).
Vertical center of gravity: 20.5 ± 0.5 in (521 ± 13 mm) above level ground.
Paralleling access panel: Required (see 3.8.5.2.1 of MIL-P-29183).

Electrical.

Input: 208Y/120 volt (V), 3-phase, 4-pole (P), 5-wire (W), 60 Hertz
Bus capacity: 800 amperes (A) Interlock.
Government part number - M29183/18.

An interlock bar shall be provided between the two main breakers to preclude both breakers from being in the "on" position at the same time. Interlocking of circuit breakers shall be accomplished through a mechanical interlock. Interlocking shall be of the break before make type; of two interlocked circuits, one cannot be made (circuit closed or energized) until the other is first broken (circuit open or de-energized). Interlocking between the first circuit breaker and the second circuit breaker shall be provided to preclude the first circuit breaker from being closed when the second circuit breaker is

AMSC N/A FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T22:00Z
Check the source to verify that this is the current version before use.

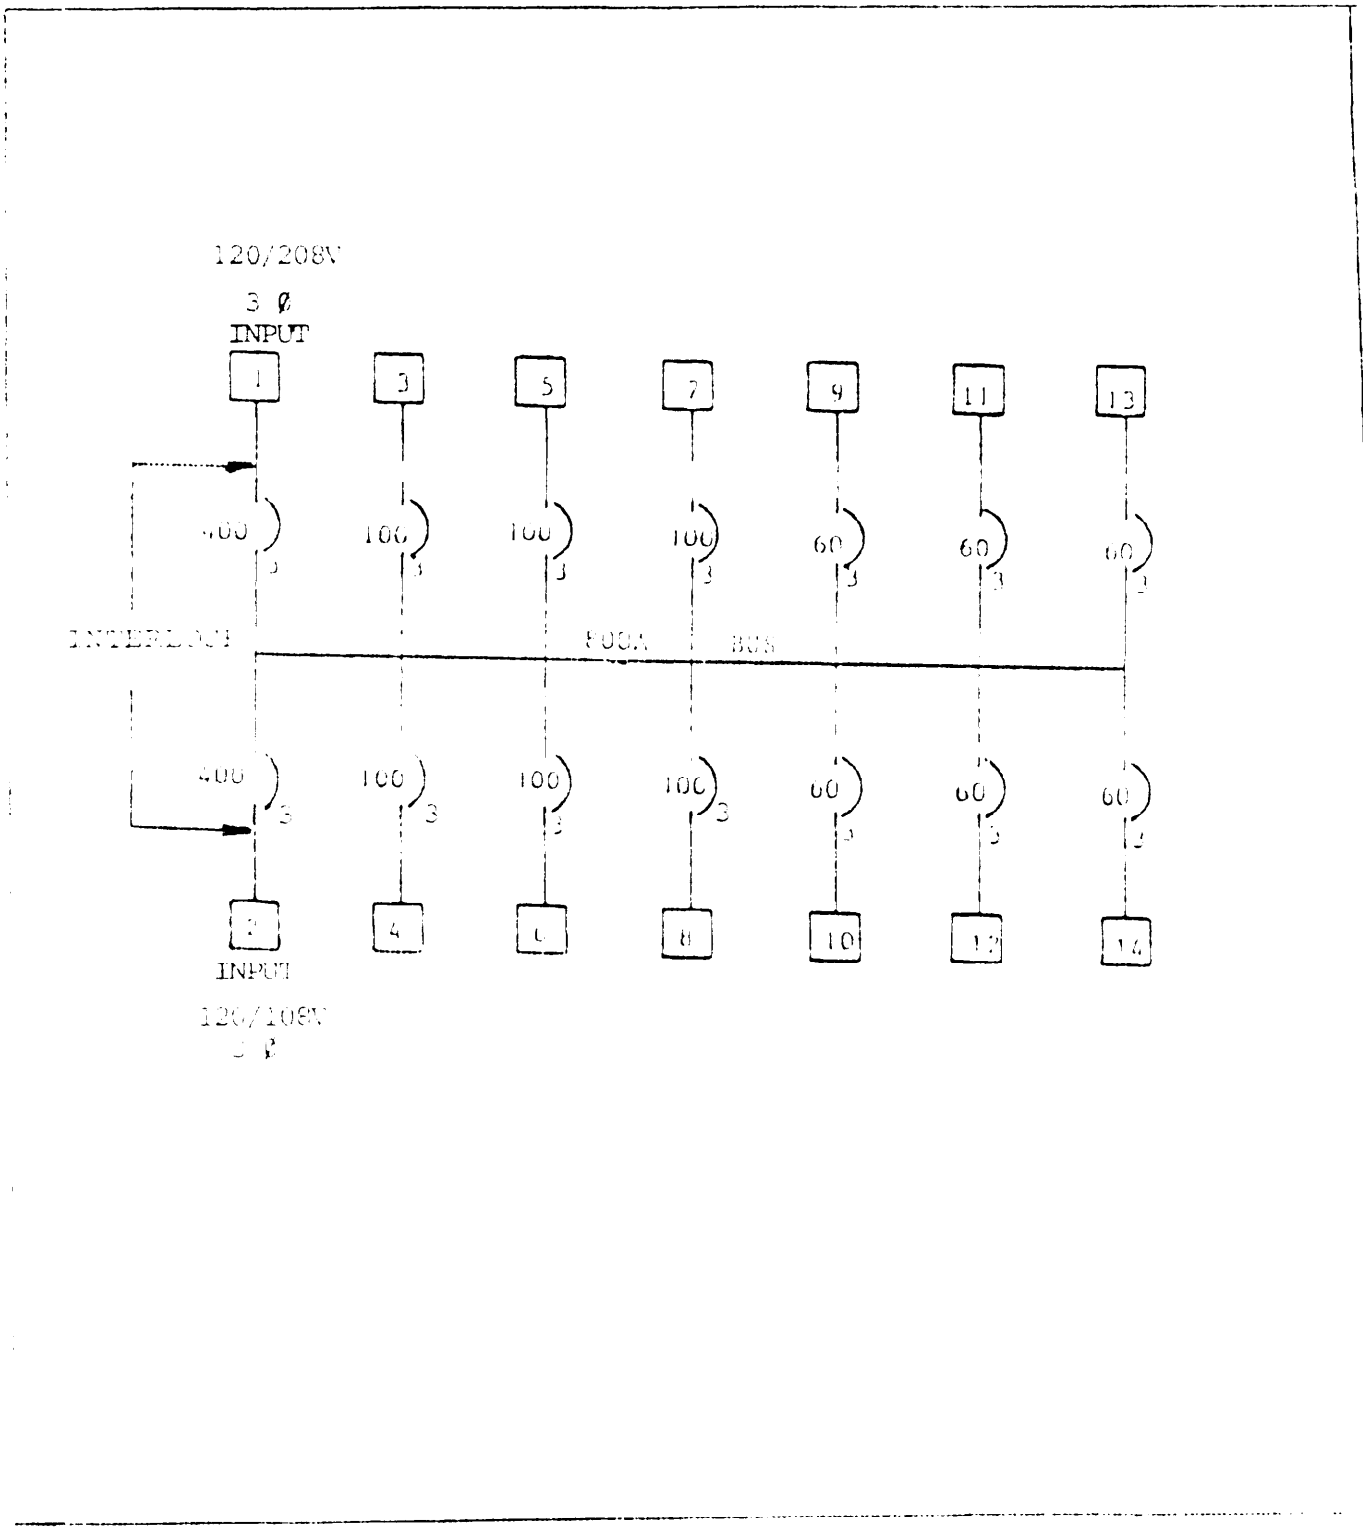


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.

closed, and to preclude the second circuit breaker from being closed when the first circuit breaker closed. The design of the interlock system shall be such as to avoid removal of the interlock bar by unqualified or unauthorized personnel. The design is intended to lessen the convenience of removing the interlock bar either accidentally or intentionally. The removal of the interlock bar shall not lessen the weatherproof characteristics of the panelboard systm. A secure location shall be provided to store the removed interlock bar without the threat of interfering with the operation or characteristics of the system.

TABLE I. Circuits characteristics.

Quantity	Circuit breaker Circuit kind	Pole - Ampere	Interface connector	
2	208/120V, 3 phase, 5W	3P-400A (Main) Non-automatic	Input, terminals	
6	208/120V 3 phase, 5W	3P-100A	MS90555C44412S	1/
6	208/120V, 60A 3 phase, 5W	3P-60A	MS90555C32412S	1/

1/ Connector designations are military part number for military type connectors conforming to MIL-C-22992.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	1/ Connector type	Connector terminal wiring/color code: Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral white wire	Ground, green (bare) wire	
1	Input	Pressure type, terminal dual lugs 4/0 AWG to 300 MCM	T1	T2	T3	T0	G	
2	Input		P1	P2	P3	P0	G	
3,4,5,6 7,8	Branch	MS90555C44412S	A	B	C	N	G	1/
9, 10, 11,12 13,14	Branch	MS90555C32412S	A	B	C	N	G	1/

1/ Connector designations are military part number for military type connectors conforming to MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.

TABLE III. Required accessory equipment.

Item	Quantity	Description	Military part number
1	6	MIL-C-22992, class L, 100A wall mount socket, receptacle	MS90555C44412S
2	6	Protective cover (cap) for item 1	MS90563-7C
3	6	MIL-C-22992, class L, 60A, wall mount socket receptacle	MS90555C32412S
4	6	Protective receptacle cover (cap) for item 3	MS90563-3C

Custodians:
Army - MF
Navy - YD
Air Force - 99

Preparing Activity:
Navy - YD

(Project 6110-0335-06)

Review Activities:
Navy - MC, MS
Air Force - 85
DLA - GS

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.