| INCH-POUND |

MIL-P-29183/20
18 June 1990

MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF
TYPE 1, CLASS 1, CONFIGURATION 1: 208Y/120 VOLT, 25 KILOWATT

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-29183B

REQUIREMENTS.

The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Required accessory equipment shall be as specified in table III.

Physical.

Nominal weight: 50 pounds.
Maximum dimensions: Length: 18 inches (1651 millimeters (mm)).
Width: 12 inches (excluding fittings and covers).
Height: 15 inches.
Two handles - one on each side, MS18012

Electrical.

Input: 208Y/120 volt (V), 3 phase, 4 pole (P), 5 Wire (W), 60 Hertz
Bus capacity: 60 amperes (A).

Government part number - M29183/20

AMSC N/A

FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T22:00Z
Check the source to verify that this is the current version before use.

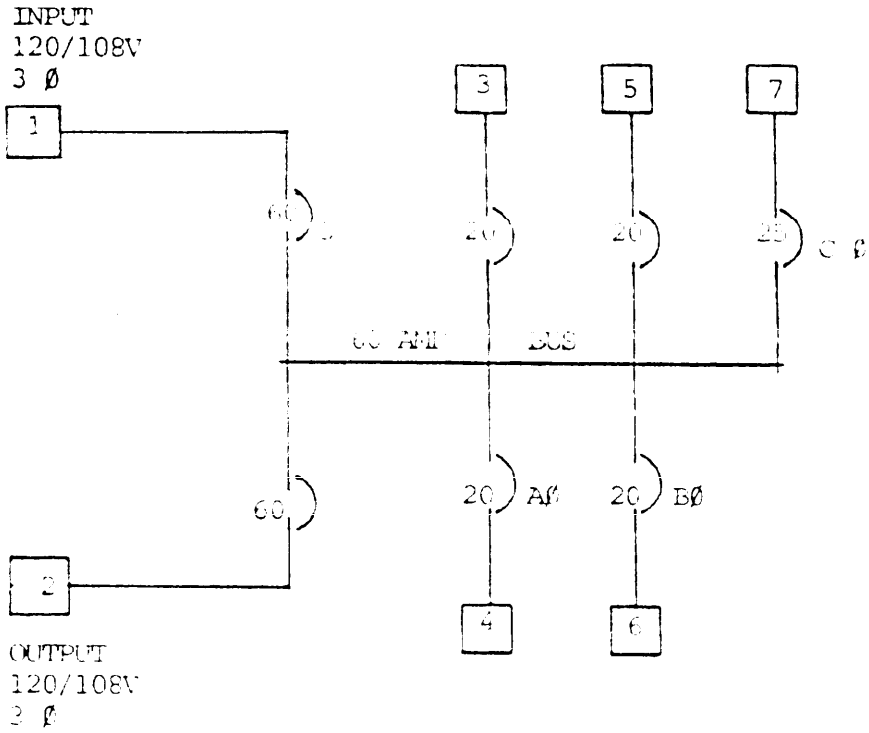


FIGURE 1. Single-line wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits characteristics.

Quantity	Circuit kind	Circuit breaker Pole-Ampere (A)	Interface connector	1/
1	208/120V, 3 phase, 5W	3P-60A (Main)	Input MS90558C32412P	1/
1	208/120V, 3 phase, 5W	3P-60A	MS90555C32412S	1/
4	120V, 1 phase, 3W	1P-20A GFCI	NEMA L5-20R	2/
1	120V, 1 phase, 3W	1P-25A	NEMA 5-15A	2/

1/ Connector designations are military part numbers for military type connectors conforming to MIL-C-22992.

2/ Connector designation conform to NEMA standards.

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	*Connector type	Connector terminal wiring/color code: Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral White wire	Ground green (bare) wire
1	Input	MS90558C32412P	A	B	C	N	G
2	Branch	MS90555C32412S	A	B	C	N	G
3,4	Branch	L5-20R	1/			W	G
5,6	Branch	L5-20R		1/		W	G
7	Branch	L5-15R			1/	W	G

1/ unmarked terminal

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.

TABLE III. Required accessory equipment.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 60A wall mount plug with coupling ring, connector.	MS90558C32412P
2	1	MIL-C-22992, class L, 60A, wall mount socket receptacle connector	MS90555C32412S
3	2	Protective cover (cap for items 1 and 2)	MS90564-3C
4	4	NEMA type connector locking L5-20R socket receptacle connector	NEMA standard
5	4	Protective receptacle cover for item 4	
6	1	NEMA type receptacle 5-15R	
7	1	Protective cover for item 6	

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6110-0335-08)

Source: https://assist.dla.mil -- Downloaded: 20260-20T22:00Z
Check the source to verify that this is the current version before use.