MILITARY SPECIFICATION SHEET


CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES 2, HAZARDOUS

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38159(USAF).

Part number: The part number shall be in the following format:

M38159	/04	E	001	P
Basic Specification identifier	Specification sheet number (note zero)	Insert Type E, F, G, H (see appendix)	Dash number	Pin (P) or Socket (S) Contact

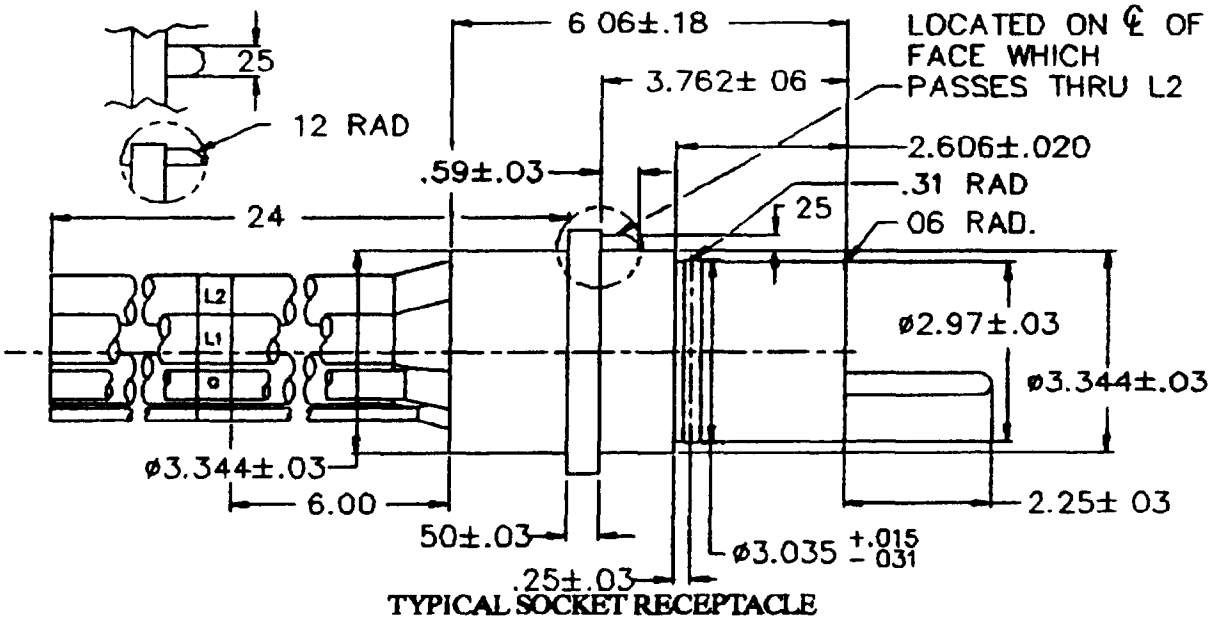

TYPICAL SOCKET RECEPTACLE


FIGURE 1. General configuration

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

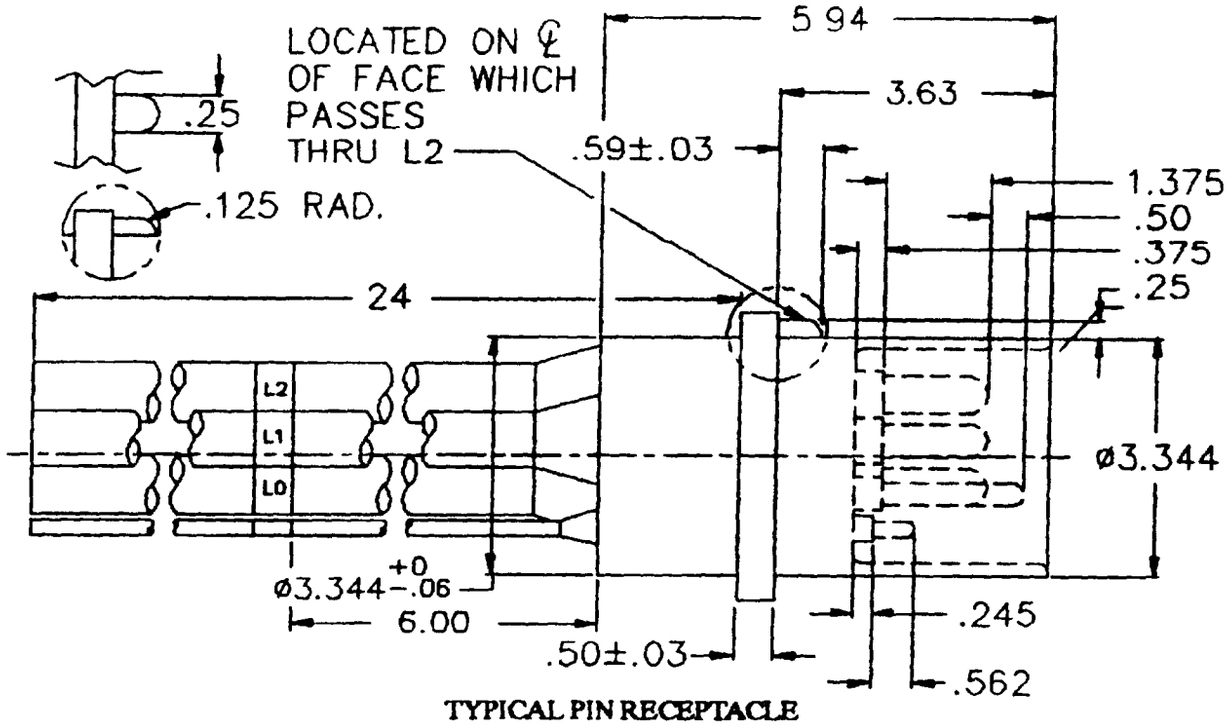

TYPICAL PIN RECEPTACLE

NOTES:

1. Material: See procurement specification
2. Remove all sharp edges
3. Unless otherwise specified, tolerances: Dec. 2 Place = +/-.015, 3 Place = +/-.005, Fraction = +/-1/64
4. For design feature purposes this standard takes precedence over procurement documents referenced herein.
5. Referenced documents shall be of the issue in effect on the date of invitation for bids.
6. These inserts shall be used in either molded elastomeric or cast metal enclosures approved for the application.
7. The receptacle enclosure approved for use in hazardous (classified) locations must include a rotatable collar.

FIGURE 1. General configuration - Continued.

CONCLUDING MATERIAL

Custodians:
Air Force - 85

Review activities:
Air Force - 11, 99

Preparing Activity
Air Force - 85

(Project 5935-F415-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.