INCH-POUND

MIL-C-38182C(USAF)
2 February 1990
SUPERSEDING
MIL-C-38182B(USAF)
12 March 1984

MILITARY SPECIFICATION

COVER, SERVICE CAP, MAN'S, WATER REPELLENT

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1 1 Scope This specification covers the requirement for a water repellent cover for the men's service cap

1 2 Classification The cover shall be furnished in two sizes as specified (see 6.2);

Size S (small) - Fits caps in sizes 6-3/8 through 7-1/8

Size L (large) - Fits caps in sizes 7-1/4 through 7-7/8

2 APPLICABLE DOCUMENTS

2 1 Government documents

* 2 1 1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6 2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in pimproving this document should be addressed to ASD/ENES, Wright-Patterson AFB OH 45433-6503 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

	JJ-W-155	Webbing, Textile, (Cotton, Elastic)
*	NN-P-71	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
	DDD-L-20	Label· For Clothing, Equipage, and Tentage; (General Use)
	PPP-B-636	Boxes, Shipping, Fiberboard
	PPP-B-676	Boxes, Set-up

MILITARY

	MIL-T-3530	Thread and Twine; Mildew Resistant or Water Repellent Treated
*	MIL-P-15011	Pallets, Material Handling, Wood Post Construction, 4-Way Entry
*	MIL-C-29363	Cloth, Poplin· Polyester and Cotton (Water Repellent)
*	MIL-T-43548	Thread, Polyester Core· Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

	FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

	MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
	MIL-STD-129	Marking for Shipment and Storage
	MIL-STD-147	Palletized Unit Loads
	MIL-STD-1394	Provisions for Evaluating Quality of Cap Crowns
*	MIL-STD-2073-1	DoD Materiel Procedures for Development and Application of Packaging Requirements

* (Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standarization Document Order Desk, Bldg 4D, 700 Robbins Ave., Philadelphia PA 19111-5094)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St , Philadelphia PA 19103-1187)

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to The Color Association of the United States, 343 Lexington Ave , New York NY 10016-0927)

* (Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents These documents also may be available in or through libraries or other informational services)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6 3) in accordance with 4 4

3.2 Guide samples Guide samples, when furnished (see 6 4), are solely for guidance and information to the contractor Variations from the document may appear in the samples, in which case the document shall govern.

* 3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document.

* 3.3.1 Basic material. The basic material for the cover shall be a polyester and cotton, water repellent poplin cloth, USN Color Blue, Shade No 3376, conforming to MIL-C-29363 (see 6 3)

3.3 2 Webbing. The webbing for the base of the crown shall conform to type I, class 1 (unbleached or bleached), 1/2 inch wide of JJ-W-155, except that the requirement for elongation at low temperature shall not apply.

3 3 3 Labels The cover shall have a combination identification and size label and an instruction label or a combination identification, size and instruction label The labels shall have colorfastness to laundering in accordance with DDD-L-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

3 3 3 1 Combination identification and size label The combination identification and size label shall conform to type VI, class 4 of DDD-L-20 and shall contain the following information·

Cover, Service Cap, Man's, Water Repellent
Contract No : DLA-100-00-0-0000 (Example) 1/
Stock No.: 8405-00-000-0000 (Example) 1/
Contractor's Name: 1/
SIZE 2/

1/ The contractor shall insert the applicable information
2/ The size shall be shown as follows· S (6 - 7-1/8) or L (7 - 7-7/8)

3 3.3 2 Instruction label The instruction label shall conform to type VI, class 3 of DDD-L-20 and shall include the following instructions·

LAUNDERING

Spot wash badly soiled areas
Wash in hot water, using detergent.
Rinse at least three times
Machine spin or squeeze by hand
Machine dry at moderate heat or hang to dry
Press with moderately hot iron.

3 3 3 3 Combination identification, size and instruction label The combination identification, size and instruction label shall conform to type VI, classes 3 and 4 of DDD-L-20. The combination identification, size and instruction label shall include the instructions specified in 3.3.3.2 The letters "S" and "L" shall be used to indicate the sizes of the size "small" cover and the size "large" cover, respectively.

3 3 4 Thread The thread for all seaming and stitching, except overedging, shall conform to Ticket No 50, 2 or 3 ply of MIL-T-43548 The thread for overedging shall conform to Ticket No. 70, 2 ply of MIL-T-43548 The color of the thread shall be Blue AB, C A 66044 (see DoD Standard Color Card for Sewing Threads). The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530. The water repellent treated thread shall not be lubricated, by any means in the end item contractor's plant, before or during sewing

* 3 4 Design. The cover shall be a one-piece crown with a piece of elastic webbing around the base of the crown and shall completely cover the crown of the service cap. Figure 1 shows the general design of the cover and is furnished for information only Should any inconsistencies exist between the requirements of this document and the figure, the document shall govern

* 3 5 Pattern. A standard pattern for the crown shall be furnished by the Government (see 6 5) The standard pattern, which shows size, shape, and directional lines, shall not be altered in any way and is to be used as a guide for cutting the contractor's working pattern The working pattern shall be identical to the standard pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

3 5 1 Pattern part One part shall be cut, from the basic material (see 3 3 1), in accordance with the standard pattern.

3 6 Construction. The cover shall be constructed as specified in table I, unless otherwise specified herein.

3 6.1 Stitches, seams, and stitchings. Stitches, seams, and stitching types specified in table I shall conform to FED-STD-751 Whenever two or more methods of seams or stitch types are given for the same operation, any one of them may be used Seam allowances shall be maintained with seams properly sewn so that raw edges, run-offs, pleats, puckers, or open seams will not result All seams shall start and finish evenly. Thread tension shall be maintained so that stitching will not be tight or loose. The stitching shall be uniformly gaged throughout the cover.

3 6.2 Thread breaks and ends of seams Thread breaks of all stitch types shall be secured by stitching back of the break not less than 1/2 inch Ends of all seams and stitching of stitch type 301, if not caught in other seams or stitching or if not the end of a continuous line of stitching, shall be backtacked not less than 1/4 inch The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch.

* 3 6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I

* 3.6 4 Bartacks. The bartacks shall measure 3/8 to 1/2 inch in length and be free from thread breaks and loose stitching

3.7 Manufacturing operations requirements. The cover shall be made in accordance with operation requirements specified in table I The contractor is not required to follow the exact sequence of operations listed unless otherwise specified Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread is removed or does not show on the finished cover

3.7 1 Shade and size marking The cut part of the cover shall be marked to insure a uniform size Any method of marking may be used except:

a Corrosive metal fastening devices

b Sew-on type tickets.

c. Adhesive type tickets which show discoloration or the adhesive mass adheres to the material upon removal of the ticket

d Any marking medium which would tend to leave a permanent mark

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations requirements.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	Cutting.			
	a. Place the pattern for the crown on the basic fabric so that the directional lines will be in the warp direction of the basic fabric Cut the crown in strict accordance with the pattern			
	b Cut the elastic webbing for the size S (small) cover 20-1/4 inches long Cut the elastic webbing for the size L (large) cover 23-1/4 inches long.			
2	Replacement of damaged parts			
	a Replace at time of cutting any part containing a hole, shade bar, smash, multiple float, or slub.			
	b Replace any part damaged during the manufacturing process by a needle chew, cut, tear, hole, burn, scissor or knife cut, or mend			
3	Stitch cover			
	a. Overedge the raw edge of the crown.	503 or 504 or 505	EFd-1	8-12
	b. Overlap the ends of the elastic webbing 1 inch, and join the ends of the elastic webbing with a single row of stitching through the center lengthwise	301	SSa-1	8-12
	c. The lapped ends of the webbing may be joined with a bartack across the full width or 1/2 inch lengthwise of the webbing	bartack		21-28

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations requirements - Continued

No	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
3.	Stitch cover - Contd			
	d. Fold the edge of the crown, forming a 3/4-inch hem and enclosing the elastic webbing. Stitch the cover with a single row of stitching 1/4 inch from the edge, forming a 1/2-inch tunnel for the elastic webbing. Either the combination identification-size label and an instruction label or the combination identification, size and instruction label shall be caught in the stitching.	301	EFa-1	8-12
4	Clean cover			
	a. Trim ends of threads and remove the loose threads from the cover.			
	b. Remove all spots, stains, and size tickets.			

3.8 Finished measurement. The finished measurement of the crown circumference shall be taken, with the cover in the relaxed position, around the base of the crown. The finished measurement of the crown circumference of the size S (small) cover shall be 19 +3/8, or -1/4 inches. The finished measurement of the crown circumference of the size L (large) cover shall be 22 +3/8, or -1/4 inches.

3.9 Workmanship. The finished cover shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable quality levels specified.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

4 1 1 Responsibility for compliance All items shall meet all requirements of sections 3 and 5 The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material

4 2 Classification of inspection. The inspection requirements specified herein are classified as follows·

a First article inspection (see 4.4).

b Quality conformance inspection (see 4.5).

4 3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with test conditions specified in 4.5.3

4.4 First article inspection When required (see 3.1 and 6.2), the first article shall be inspected as specified in 4 5.3 for compliance with design, construction, workmanship, and dimensional requirements. The presence of any defect shall be cause for rejection of the first article

* 4 5 Quality conformance inspection Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-1394 or MIL-STD-105, as applicable. The acceptance criteria, as specified in the contract or purchase order, shall be binding.

4 5 1 Component and material inspection. In accordance with 4 1, components and materials shall be inspected in accordance with the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document

4 5.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with specified requirements. This inspection shall include verification that the working patterns conform to the Government patterns in all respects. Whenever nonconformance is noted, corrections shall be made to the itmes affected and lot in process Items which cannot be corrected shall be removed from production

4 5 3 Point count inspection Sampling and inspection provisions for end item examination of the cover, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1394. The occurrence of defects shall not exceed the applicable point value limit specified in MIL-STD-1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

4.5.3.1 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements Defects shall be scored in accordance with the list below The sample unit shall be one palletized unit load fully packaged The lot size shall be the number of palletized unit loads in the inspection lot The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

* 5.1 Preservation In accordance with the requirements of MIL-STD-2073-1, preservation shall be level A, C, or Commercial, as specified (see 6.2)

5 1.1 Level A. Package 12 covers, of one size only, in a polyethylene bag, 0 0015 inch thickness (±20 percent tolerance). All seams and the final closure shall be heat sealed. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Each bag of covers shall be placed in a container conforming to type I, class A, variety 1, style 4 of PPP-B-676 or a type CF, class domestic, grade 125, style RSC box conforming to PPP-B-636. The box shall be closed by means of 1-1/2 inches wide pressure-sensitive paper tape

* 5 1.2 Level C. The covers shall be preserved in accordance with MIL-STD-2073-1 requirements for this level

5.1.3 Commercial Covers shall be preserved in accordance with ASTM D 3951

* 5.2 Packing. In accordance with the requirements of MIL-STD-2073-1, packing shall be level A, B, C, or Commercial, as specified (see 6.2).

5.2 1 Level A Twenty unit containers, containing 240 covers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard container conforming to type SF, class weather-resistant, grade V2s, style RSC of PPP-B-636. Closure of each container shall be in accordance with the appendix of PPP-B-636

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

5 2 2 Level B Twenty unit containers, containing 240 covers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF or SF, class domestic, grade 275, style RSC of PPP-B-636 Closure of each shipping container shall be in accordance with method III as specified in the appendix of PPP-B-636.

5.2.2 1 Weather-resistant-container When specified (see 6 2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.5.3.

* 5 2 3 Level C Covers of one size only, preserved as specified in 5 1, shall be packed in accordance with MIL-STD-2073-1 requirements for this level

5 2 4 Commercial Covers of one size only, preserved as specified in 5 1, shall be packed in accordance with ASTM D 3951

* 5 3 Palletization When specified (see 6 2), covers packed as specified in 5 2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147 Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C, and D, or film bonding methods F or G Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be a 4-way entry, type I, class 1, style 1, 1A, or 1B, size A, wood group I, II, III, or IV of MIL-P-15011, or 4-way entry, type IV, V, or VIII, class 1, style A, size 2, wood group I, II, III, or IV, grade A of NN-P-71 Interlocking of loads shall be effected by reversing the pattern of each course If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

* 5 4 1 Polyethylene packages. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification

6. NOTES

* (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory)

6 1 Intended use The water repellent cover is intended to be used to protect the service caps worn by male personnel of the Department of the Air Force

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this document

b. Size required (see 1.2).

c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2 1 and 2.2)

d When a first article is required (see 3.1).

e Selection of applicable levels of preservation and packing (see 5.1 and 5 2).

f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5 2 2 1)

g. When palletization is required (see 5.3).

* 6.3 First article. When first article inspection is required, the item should be a first article sample. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract Bidders should not submit alternate bids unless specifically requested to do so in the solicitation

6.4 Samples For access to samples of the end item and shade samples, address the contracting activity issuing the invitation for bids

* 6.5 Government-furnished patterns The contracting officer should arrange to furnish the pattern listed in 3.5

* 6.6 Subject term (key word) listing.

protective covering
rain gear

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

6 7 Changes from previous issue The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11
DLA - DP


Preparing activity:
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT


User activity:
Air Force - 45

Project No 8405-F121

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

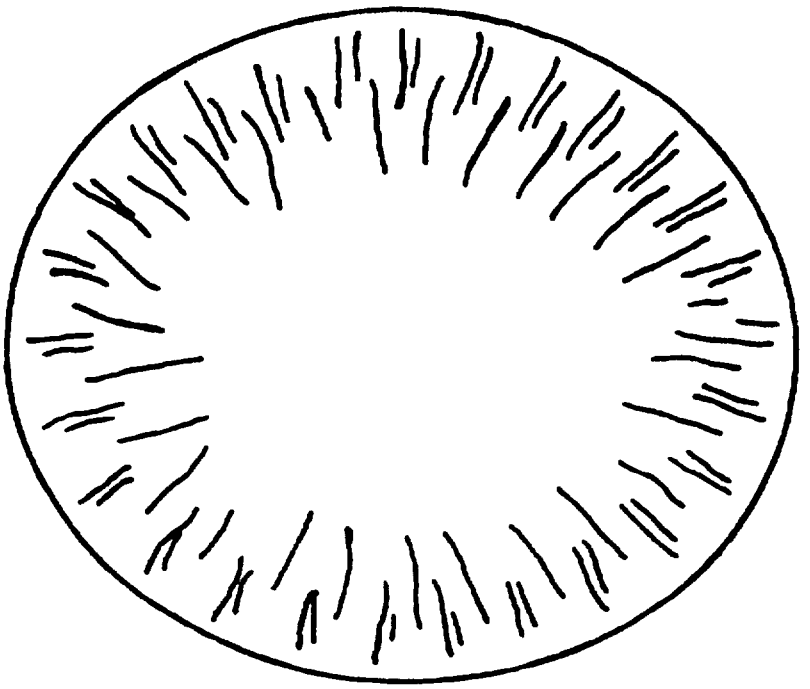

Top View

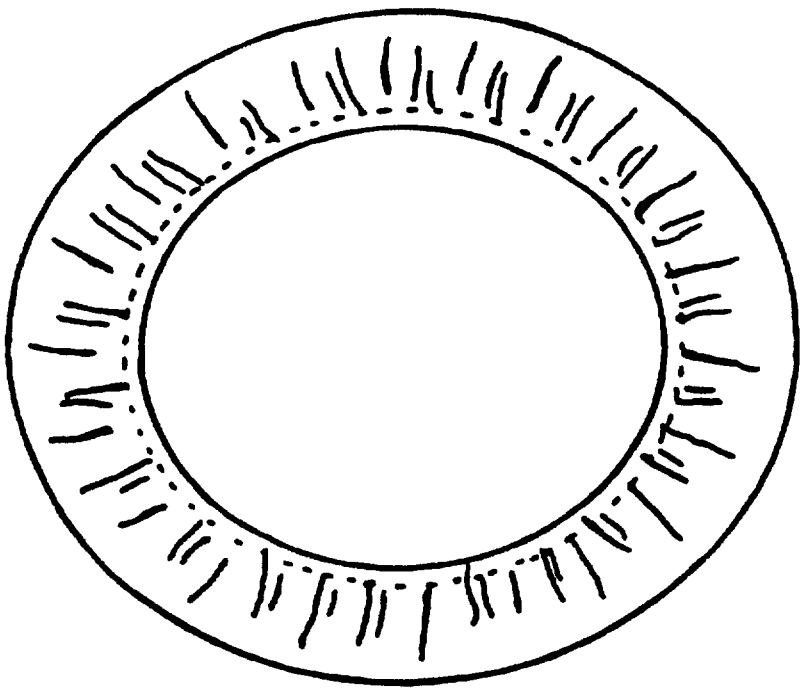

Bottom View

FIGURE 1. Man's service cap cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-38182C(USAF)	900202

3. DOCUMENT TITLE
Cover, Service Cap, Man's, Water Repellent

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
ASD/ENES	(513) 255-6295	785-6295
c. ADDRESS (Include Zip Code) Wright-Patterson AFB OH 45433-6503	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.