MILITARY SPECIFICATION

SELECTOR, ANTENNA C-4808/ARC

1. SCOPE

1.1 This specification covers the requirements for one type of a two-position antenna selector designated Selector, Antenna C-4808/ARC.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	Boxes, Folding, Paperboard
PPP-B-585	Boxes, Wood, Wirewound
PPP-B-591	Boxes, Fiberboard, Wood-Cleated
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Fiberboard
PPP-B-676	Boxes, Set-up, Paperboard
PPP-T-60	Tape, Pressure Sensitive Adhesive, Waterproof - for Packaging and Sealing

Military

MIL-P-116	Preservation, Methods of
MIL-E-5400	Electronic Equipment, Aircraft, General Specification for
MIL-E-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-B-10377	Box, Wood, Cleated, Veneer, Paper-Overlaid
MIL-L-10547	Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-471	Maintainability Demonstration

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-781	Reliability Test: Exponential Distribution
MIL-STD-831	Test Reports, Preparation of
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods

DRAWINGS

Air Force

58D12655	Plate - Mounting, Antenna Selector
58D12656	Mounting MT-1932/A - Assembly of
63C4011	Selector, Antenna C-4808/ARC on Mounting MT-1932/A
63D4012	Wiring Diagram - UHF Antenna and Selector, C-4808/ARC Antenna and SA-521/A Switch

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provision for preproduction testing.

3.2 Units. One complete Selector, Antenna C-4808/ARC shall consist of:

Item Nr.	Quantity	Description
1	1	Selector, Antenna C-4808/ARC
2	1	Mounting MT-1932/A

3.3 General specification. The requirements of MIL-E-5400 shall apply as requirements of this specification with additions and exceptions to the paragraphs of MIL-E-5400, as identified by similarity of paragraph headings, called out herein. When the two documents conflict, this specification shall govern.

3.3.1 Classification. The selector, Antenna C-4808/ARC shall be class 2 as defined in MIL-E-5400 with exceptions as specified herein.

3.3.2 Materials, parts, and processes

3.3.2.1 Electrical connector. The antenna selector shall be fitted with a connector suitable for mating with Deutsch DM9700-19S, or equal.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:00Z
Check the source to verify that this is the currenversion before use.

3.3.3 Design and construction

3.3.3.1 Overload protection. One ampere rating fuse shall be used.

3.3.3.2 Reliability, longevity, and maintainability

3.3.3.2.1 Reliability. Reliability of the Selector, Antenna C-4808/ARC shall be determined in accordance with MIL-STD-781.

3.3.3.2.2 MTBF for selector antenna. The minimum acceptable mean-time-between-failure (MTBF) for the C-4808/ARC antenna selector shall be 1000 hours.

3.3.3.3 Maintainability

3.3.3.3.1 Maintainability demonstration. Maintainability demonstration requirements shall be in accordance with MIL-STD-471.

3.3.3.4 Service conditions (electrical)

3.3.3.4.1 Power consumptions. The selector shall not require more than 25 watts of primary power for normal operation.

3.3.3.4.2 Input power variations. The selector shall meet all of the performance requirements of this specification when the input power is varied within the limits of MIL-STD-704 for category B equipment.

3.3.3.5 Service conditions (environmental)

3.3.3.5.1 Operating temperature. The operating temperature shall be from -54° to +85°C.

3.3.3.5.2 Vibration frequency. The selector shall be tested under mechanical excitation over a frequency range from 5 to 1000 Hz. The amplitude over the frequency range shall be 0.08 inch double amplitude (maximum total excursion) or 20G whichever is less. The tolerance on vibration amplitude shall be ±10 percent.

3.4 Design and construction. The antenna selector shall be designed and constructed to utilize audio-signal-level information from a radio set and control a single-pole, double-throw, radio-frequency switch. Physical construction shall be in accordance with Drawing 63C4011. Reduction in size and weight is permissible, but conpatibility with the external wiring, electrical connectors, and mounting dimensions which affect interchangeability with the outline drawing shall be maintained.

3.4.1 Mounting. In addition to the requirements of MIL-E-5400, mounting for the antenna selector shall be in accordance with Drawing 58D12655 and Drawing 58D12656. The mounting shall be attached to the selector unit during testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

3.4.2 Adjustment provisions. Means shall be provided on the front panel for adjustment of the sensitivity control on the antenna selector. This adjustment shall be a screwdriver adjustment with a locking device for holding the setting. The sensitivity adjustment shall be labeled SENSITIVITY and an arrow shall be provided to indicate clockwise rotation for increasing sensitivity.

3.4.3 Threshold sensitivity adjustment. Means shall be provided for adjustment of the threshold level to any audio voltage between 50 millivolts and 1 volt rms, using 1000 Hz as a reference frequency, applied to pin 4 of plug DM9700-19S, or equal, of the selector.

3.4.4 Maximum audio signal tolerance. The antenna selector shall be capable of handling audio input voltages as high as 80 volts peak and 40 volts rms without causing malfunction or excessive delay in resumption of normal operation after the maximum voltage has been removed.

3.4.5 Cyclic switching rate. The cyclic switching rate shall be 70 plus or minus 15 cycles per minute. An adjustment of the switching rate may be provided if necessary for initial adjustment. If used, the adjustment shall be provided with a locking device and shall be accessible from inside the case only. The dwell period of each half cycle shall be essentially equal and shall not deviate more than 20 percent during extreme environmental conditions.

3.4.6 Manual over-ride provisions. The internal circuitry shall be designed to permit control of the external r-f switch to be exercised manually by connection of a switch as indicated on Drawing 63D4012.

3.4.7 Indicator circuit. A circuit shall be closed for external use to perform the following functions. The circuit shall be closed when the selector is locked on and the cyclic action has stopped. In the closed position, the circuit shall have a maximum resistance of 2 ohms, and a minimum resistance of 10,000 ohms in the open position. This circuit is intended for use in switching a low-power, 18-volt, 400-cycle indicator circuit.

3.5 Performance

3.5.1 Function. The antenna selector shall perform the function of selecting 1 of 2 antennas by controlling the action of a single-pole, double-throw, radio-frequency switch which shall be located remotely from the antenna selector. This control of the remote r-f switch shall consist of off-on information.

3.5.2 Control by a receiver-transmitter. The antenna selector shall, in turn, be controlled by an associated receiver-transmitter. This control of the antenna selector shall take the form of an abrupt change in the audio signal level supplied by the receiver-transmitter. This change in audio level is typical of the audio output from Radio Sets AN/ARC-27, AN/ARC-34, and AN/ARC-90 just before and immediately following the opening of the squelch relay when a usable signal is received. During

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

that time interval when the audio signal is very low and the receiver squelch is closed, the antenna selector shall supply information to cause the r-f switch to cycle continuously between the two antennas. This cyclic action shall consist of equal time periods of off and on, programmed alternately.

3.5.2.1 Audio input impedance. The audio input of the selector, when connected for control by Radio Sets AN/ARC-27, AN/ARC-34, and AN/ARC-90 shall present a bridging impedance of at least 2000 ohms.

3.5.2.2 Control signal frequency response. The selector shall respond to control signals of any frequency between 100 and 4000 Hz. The response shall be essentially flat with a 3-dB decrease in response permitted at the frequency extremes.

3.5.3 Sequence. When control of the remotely located r-f switch is exercised by the antenna selector, it shall take one or the other of the following two sequences:

a. If the r-f relay is de-energized, thus connecting the antenna through its normally closed contacts to the receiver, when an abrupt increase in audio level is experienced by the antenna selector, the cyclic action shall stop, causing the r-f relay to remain de-energized. This condition shall remain until the audio level again drops below the adjusted threshold level. If a drop in level below the threshold level occurs, the r-f relay shall again resume its cyclic action.

b. If the r-f relay is energized, thus connecting the other antenna to the receiver when an abrupt increase in audio level is experienced by the anetenna selector, the cyclic action shall stop and the r-f relay shall remain energized until the audio signal drops below the adjusted threshold level, causing the cyclic action to resume.

3.5.4 Memory circuit. The memory circuit shall be capable of storing information indicating whether the external relay was energized or de-energized when the last abrupt increase in audio level above the threshold level occurred. The memory shall be retained during all periods when the audio level is below the threshold level. The information stored shall not be affected by any audio output from the receiver-transmitter during periods of transmission or during the transient conditions resulting from changeover from reception to transmission, or transmission to reception. This information shall be retained until the next squelch opening occurs or until the primary power is turned off. Using the stored information, the antenna selector shall select the antenna that provided the last usable received signal when transmission was initiated. The antenna selector shall utilize a controlled ground-seeking circuit from the transmitter for transmit-receive information which the ground circuit completed during transmit conditions. This controlled ground circuit within the antenna selector shall use a series diode to reflect a high impedance to plus 28 volts dc on the circuit during the receiving periods. The diode shall have a peak inverse voltage (PIV) rating of 1000 volts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

3.5.5 Relay contact carrying capacity. The contacts of the relay used in the selector to control the external r-f relay shall have a current rating of at least 2 amperes. Circuitry shall be included within the selector unit for suppression of transient voltages ranging up to 400 volts on the external r-f relay control line to within 20 percent of the control voltage.

3.5.6 Selector recovery performance. Operational performance of the selector shall be such that the differential in control voltage which occurs between antenna relay lock-on and drop-out (resume cycling) shall be 3 plus or minus 1 dB. The recovery time (resume cycling) shall not be less than 400 milliseconds nor more than 1 second.

3.6 Weight. The weight of the antenna selector, including the mounting, shall not exceed 24 ounces.

3.7 Government loaned property. When specified in the contract or purchase order, the Government will loan the following, if available, to the contractor upon his request:

Item Nr.	Description	Quantity
1	Receiver-Transmitter, Radio RT-463A/ARC-34B	1
2	Mounting MT-1099U	1
3	Power Supply PP-1990/ARC-34A	1
4	Control, Radio Set C-1057 ( )/ARC-34	1
5	Switch, R-F Transmission Line SA-521/A	1

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the units listed in 3.2 shall be classified as follows:

a. Preproduction tests

b. Quality conformance inspection tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

4.3 Standard test conditions. Unless otherwise specified, all tests shall be performed under the following standard test conditions:

a. Temperature: Between the limits of +15° and +35°C

b. Altitude: Normal ground

c. Humidity: Prevailing room ambient

d. Vibration: None

e. Primary input power: 28.0 volts dc ±0.5 volt. Voltages shall be measured at the power-input terminal of the equipment

f. Equipment warmup period: 5 minutes for performance testing and 2 minutes for operational testing.

4.4 Preproduction testing

4.4.1 Test sample. The test sample shall consist of 5 each of each unit representative of the production equipment. The samples shall be identified with the manufacturer's part number and such other information as required by the procuring activity.

4.4.2 Preproduction test report. The contractor shall prepare a preproduction test report in accordance with MIL-STD-831.

4.4.3 Preproduction tests. Preproduction test shall consist of the tests specified in 4.6, except preproduction reliability tests (see 4.6.13).

4.4.3.1 Preproduction reliability tests. The preproduction samples of the equipment shall be tested by the contractor for reliability in accordance with MIL-STD-781 using test plan XXVI, test level G (see 4.6.13).

4.4.3.1.1 Accept-reject criteria. Accept-reject criteria shall be judged on the basis of test plan XXVI of MIL-STD-781.

4.5 Quality conformance inspection. Quality conformance inspection shall consist of:

a. Individual tests

b. Sampling plans and tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

4.5.1 Individual tests. The items listed in 3.2 shall be subjected to the following tests:

a. Examination of product

b. Threshold sensitivity uhf operation

c. Cycling switch test.

4.5.2 Sampling plans and tests

4.5.2.1 Sampling plan A. Samples of equipment shall be tested for reliability in accordance with MIL-STD-781 using test plan XXVII, test level G (see 4.6.13).

4.5.2.1.1 Accept-reject criteria. Accept-reject criteria shall be judged on the basis of test plan XXVII of MIL-STD-781.

4.5.2.2 Sampling plan B. Unless otherwise specified, sampling tests shall be conducted on at least 2 percent of the items on order. The samples shall be selected at random by the procuring activity, or authorized representative, from quantities of items that have previously passed the individual tests.

4.5.2.3 Sampling tests. Sampling tests shall consist of those tests listed under 4.5.1, 4.6.4 through 4.6.10, and 4.6.11e.

4.5.2.4 Accept-reject criteria. When an item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the tests shall be repeated.

4.5.2.5 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. But final acceptance of the items on hand or items produced later shall not be made until it is determined that all items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them.

4.6 Test methods

4.6.1 Examination of product. Each item produced under this specification shall be subjected to a visual inspection to determine compliance of the part or assembly with the requirements herein for materials, workmanship, finishes, and mechanical details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

4.6.2 Threshold sensitivity uhf operation. To test the lower threshold, the following procedure shall be used: With an audio input from a signal generator having an impedance of 600 ohms or less at a frequency of 1000 plus or minus 50 Hz, adjust the sensitivity control to maximum and the d-c supply voltage to 24 plus or minus 0.1 volt. Raise the input from the signal generator to 0.050 volt (50 millivolts). This voltage shall cause the relay in the selector to stop cycling and cause the memory relay to lock. To test the upper threshold, the following procedure shall be used: With the audio input level set at 1 volt, it shall be possible to decrease the sensitivity control until the selector starts cycling again without using more than 95 percent of the adjustment range.

4.6.3 Cycling switching. The switching rate shall be measured using conventional events per unit time (EPUT) meters. The dwell periods of each half cycle shall be compared by using an oscilloscope or other suitale device. The initial adjustment of the switching rate shall be made at room temperature. No further adjustment shall be made until completion of all tests.

4.6.4 Transient suppression. An inductive load which will produce a transient of approximately 400 volts on the control line shall be controlled by the antenna selector at its normal cycling rate for 50 hours. The amount of suppression shall be measured to determine compliance with 3.5.5.

4.6.5 Recovery. The antenna selector shall be caused to stop cycling by means of an audio signal of 0.5 volt at 1000 Hz applied to the audio input terminal. When the signal is removed, the recovery time (resume cycling) shall be measured to determine compliance with 3.5.6. The recovery time shall be an average of at least 10 sequences.

4.6.6 Maximum signal. With the antenna selector connected for normal operation and adjusted for 0.05 volt sensitivity, the audio input shall be changed from 0 to 40 volts rms at 1000 Hz. With this voltage applied, the cyclic action shall stop. Upon removal of the audio voltage, the cyclic action shall be sustained and no change in adjustment shall be necessary to resume normal operation.

4.6.7 Memory circuit. A test setup consisting of Radio Set AN/ARC-34, two 50-ohm dummy load wattmeters, a TS-510, or equal, uhf signal generator, and a single-pole, double-throw coaxial switch, SA-521/A, shall be connected in accordance with figure 1. The signal generator shall be substituted for one of the 50-ohm loads and the input increased until the receiver squelch opens and the cyclic action of the antenna selector stops. Then the 50-ohm dummy load shall be substituted for the signal generator and the transmitter keyed for at least 10 intervals of 5 seconds each with 5 seconds in receiving condition between each transmission. During each transmission, the antenna selector shall select the dummy load that was replaced by the signal generator. The test shall be repeated by substituting the signal generator for the other 50-ohm dummy load. In each case, the antenna selector shall always select the load that was memorized by substituting the signal generator.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:00Z
Check the source to verify that this is the currentversion before use.

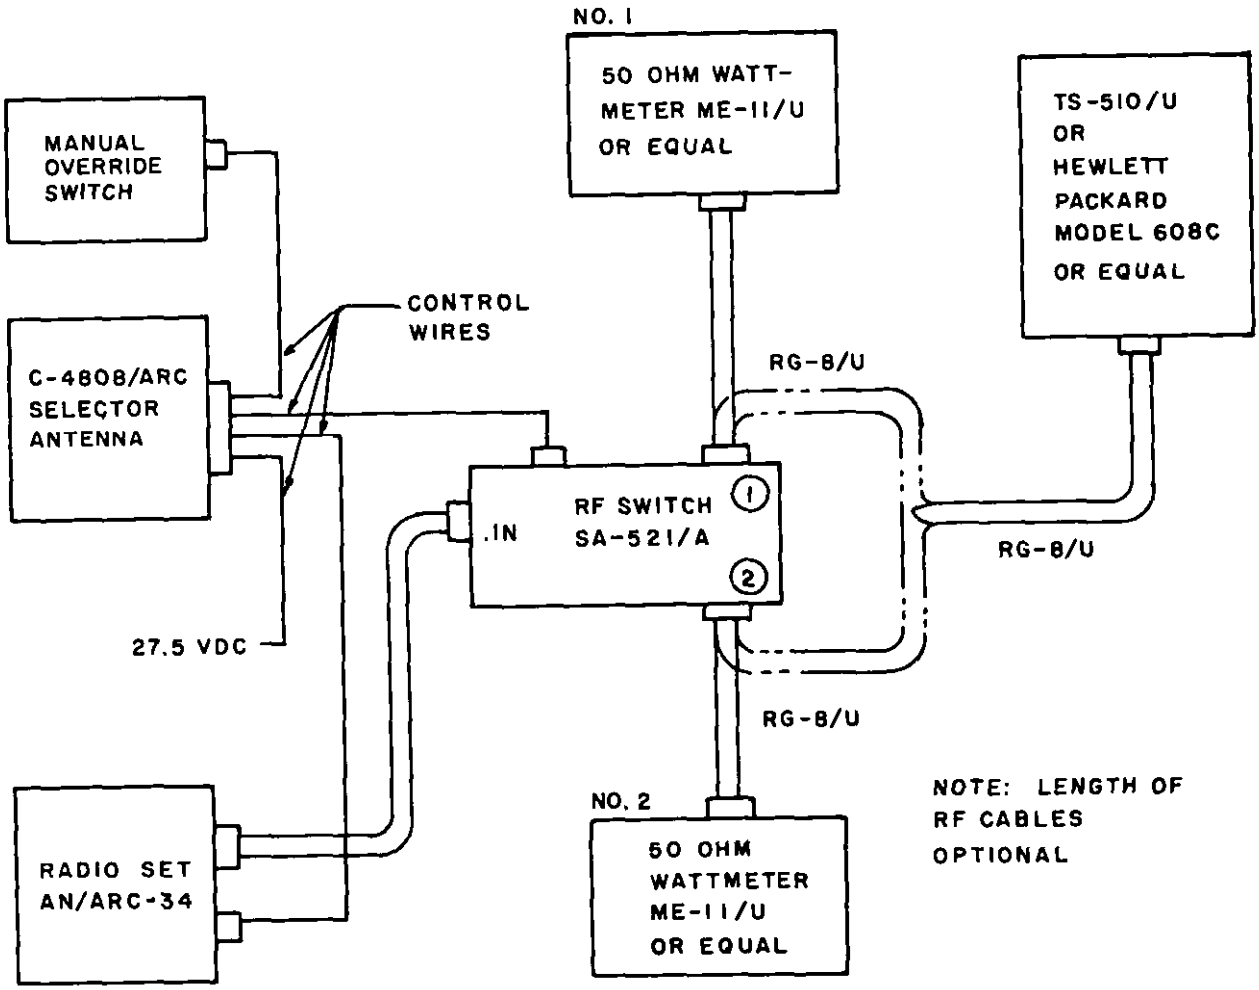


FIGURE 1. Memory Test Circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

4.6.8 Manual over-ride provision. Using the test setup shown on figure 1, it shall be possible to select dummy load Nr. 1 or Nr. 2 independently of the antenna selector for either transmission or reception by use of positions 1 and 2. The selection of the third position on the switch shall restore the antenna selector to normal control.

4.6.9 Frequency response. Using an audio signal generator and a fixed setting of threshold sensitivity, the response between input frequencies of 100 and 4000 Hz shall be determined. The response shall be within the limits specified in 3.5.2.2 during and following any of the environmental tests specified herein.

4.6.10 Input power variation. The memory circuit tests specified in 4.6.7 shall be repeated using 21 and 29 volts in lieu of the 27.5 volts dc specified on figure 1. In each case, after the initial adjustment of sensitivity threshold, the antenna selector shall pass the memory circuit test. For emergency conditions, the input voltage shall be 17.0 volts dc, during which the cycling rate shall be within the 20-percent tolerance specified in 3.4.5.

4.6.11 Environmental tests. Environmental tests shall be performed in accordance with MIL-T-5422 for class 2 equipment with the following exceptions. The antenna selector shall meet all of the requirements of this specification during and after the environmental tests.

a. The temperature for step 6 of the temperature and altitude tests shall be plus 85°C in lieu of plus 71°C

b. The explosion test shall be procedure I

c. The sand and dust fungus tests shall not apply

d. Salt atmosphere tests need not be performed

e. Vibration tests shall be in accordance with the curve shown on figure 2 with the selector and mounting assembly fastened securely to the vibration test platform.


4.6.12 Interference control. Radio-frequency interference tests shall be in accordance with MIL-I-6181.

4.6.13 Reliability. The performance characteristics to be measured during reliability testing are as follows:

a. Chamber temperature range: The chamber temperature range shall be -54° to +85°C

b. On-off cycling: On-off cycling shall be 1 hour at -54°C and 3 hours at +85°C with continual electrical cycling. The thermal change of the test chamber shall not be greater than 5°C per minute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

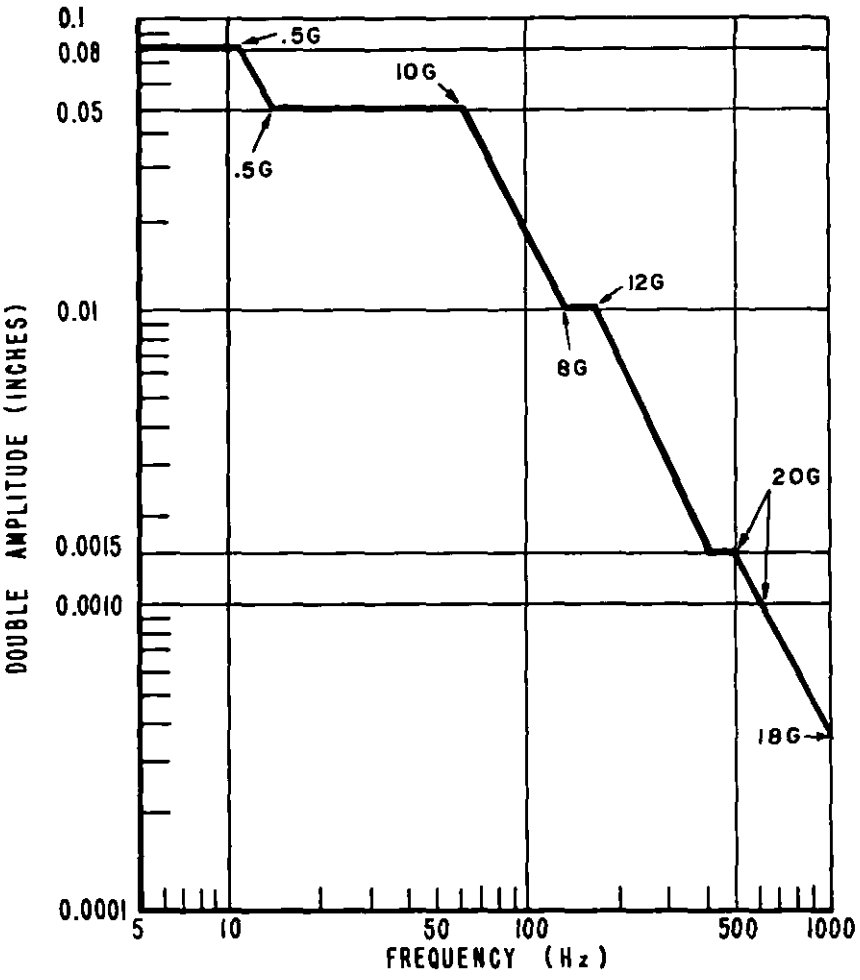

NUMBER OF RESONANCES	0	1	2	3
TOTAL VIBRATION TIME AT RESONANCE *		30 MIN	1 HR	1 1/2 HRS
CYCLING TIME	3 HRS	2 1/2 HRS	2 HRS	1 1/2 HRS

*30 minutes at each resonance - durations shown refer to one axis of vibration.

FIGURE 2. Vibration Test Amplitudes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

c. Electrical cycling: Electrical cycling shall be a continual repetition of the following:

(1) 1 minute audio in, antenna 1

(2) 2 minutes transmit, antenna 1

(3) 10 minutes cycling

(4) 2 minutes transmit, antenna 1

(5) 1 minute audio in, antenna 2

(6) 2 minutes transmit, antenna 2

(7) 10 minutes cycling

(8) 2 minutes transmit, antenna 2

d. Vibration: The equipment shall be vibrated for 10 minutes during each hour of equipment operating time. The vibration shall be on the basis of any frequency between 20 and 60 Hz with applied acceleration of plus or minus 2G plus or minus 10 percent. The frequency shall be approximately constant. The motion need not be simple harmonic or linear.

4.6.14 Maintainability demonstration. Maintainability demonstration tests shall be in accordance with method 2 of MIL-STD-471.

4.7 Inspection of the preservation, packaging, packing, and marking for shipment and storage. Inspection of the preservation, packaging, packing, and marking shall be in accordance with the requirements of section 5 or of the documents specified therein.

5. PREPARATION FOR DELIVERY

5.1 Levels of preservation and packaging

5.1.1 Level A. The Selector, Antenna C-4808/ARC shall be preserved in accordance with method II of MIL-P-116, and packaged in containers meeting the requirements of PPP-B-566, PPP-B-676, or PPP-B-636. Unit quantities shall be one each.

5.1.2 Level C (minimum military pack). The antenna selector shall be preserved and packaged to insure adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity for immediate use, or controlled humidity storage. This level may conform to the suppliers commercial practice when such meets the requirements of this level.

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:00Z
Check the source to verify that this is the current version before use.

5.2 Levels of packing

5.2.1 Level A. The antenna selector, preserved and packaged to meet 5.1.1, shall be packed in exterior-type shipping containers meeting the requirements of PPP-B-585, PPP-B-591, PPP-B-621, PPP-B-601, PPP-B-636 (type I, class 2 or type II, class 2), or MIL-B-10377. Insofar as practicable, exterior containers shall be of uniform shape and size, be of minimum cube and tare consistent with the protection required, and contain identical quantities. The gross weight of each pack shall be limited to approximately 200 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers shall be provided with the case liner conforming to MIL-L-10547 and shall be sealed in accordance with the appendix thereto. The case liner will not be required when the unit, intermediate, or exterior container conforms to PPP-B-636 (type I, class 2 or type II, class 2), and is sealed at all joints and seams including manufacturer's joint, with tape conforming to PPP-T-60.

5.2.2 Level B. The antenna selector, preserved and packaged to meet 5.1.1, shall be packed in domestic-type exterior containers meeting PPP-B-591, PPP-B-601, PPP-B-585, PPP-B-621, PPP-B-636, or MIL-B-10377. Exterior containers shall be of minimum cube and tare consistent with the protection required. Insofar as practicable, exterior containers shall be of uniform shape and size and contain identical quantities. The gross weight of each pack shall be limited to approximately 500 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. When fiberboard containers are used, the fiberboard shall meet the special requirements table of PPP-B-636.

5.2.3 Level C. Packages which require over-packing for acceptance by the carrier shall be packed in exterior-type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall meet consolidated fright classification rules or regulations of other common carriers as applicable to transportation.

5.3 Physical protection. Cushioning, bracing, and bolting as required, shall be in accordance with MIL-STD-1186 except that for domestic shipments, water-proofing requirements for cushioning materials and containers shall be waived. Drop tests of MIL-STD-1186 shall be waived when preservation, packaging, and packing of the item is for immediate use or when drop tests of MIL-P-116 apply.

5.4 Marking. Interior and exterior containers shall be marked in accordance with MIL-STD-129. The shipment marking nomenclature shall be Selector, Antenna C-4808/ARC.

6. NOTES

6.1 Intended use. Selector, Antenna C-4808/ARC is intended for use to automatically control the r-f transmission line switch, SA-521/A, in selecting 1 of 2 uhf antennas on the basis of a minimum usable signal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procument documents should specify the following:

a. Title, number, and date of this specification

b. Number of preproduction samples, point of testing, and delivery of preproduction test report (see 4.4.1 and 4.4.2)

c. Standard Government-furnished sample source (see 3.7)

d. That preproduction reliability samples be refurbished by the contractor

e. Selection of applicable levels of preservation, packaging, packing, and marking.

Custodian:
Air Force - 11

Review activity:
Air Force - 84

Preparing activity:
Air Force - 11

Project No. 5821-F034

☆U.S. GOVERNMENT PRINTING OFFICE: 1971-714-161/13192

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:00Z
Check the source to verify that this is the current version before use.

ASD(ASNPS)
WRIGHT-PATTERSON AFB, O 45433

POSTAGE AND FEES PAID

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

ASD(ASNPS)
Wright-Patterson AFB, O 45433

343-220 (A-355)

Source: https://assist.dla.mil -- Downloaded: 202640-21T12:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

AFLC–WPAFB–OCT 67 2M

Source: https://assist.dla.mil -- Downloaded: 202610-21T12:00Z
Check the source to verify that this is the current version before use.