
MILITARY SPECIFICATION SHEET

BATTERY, PRIMARY, LITHIUM SULFUR DIOXIDE BA-5567/U

This specification sheet is approved for use by the Electronics Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lithium sulfur dioxide primary battery type described herein shall consist of this document and the issue in effect of Specification MIL-B-49430(ER).

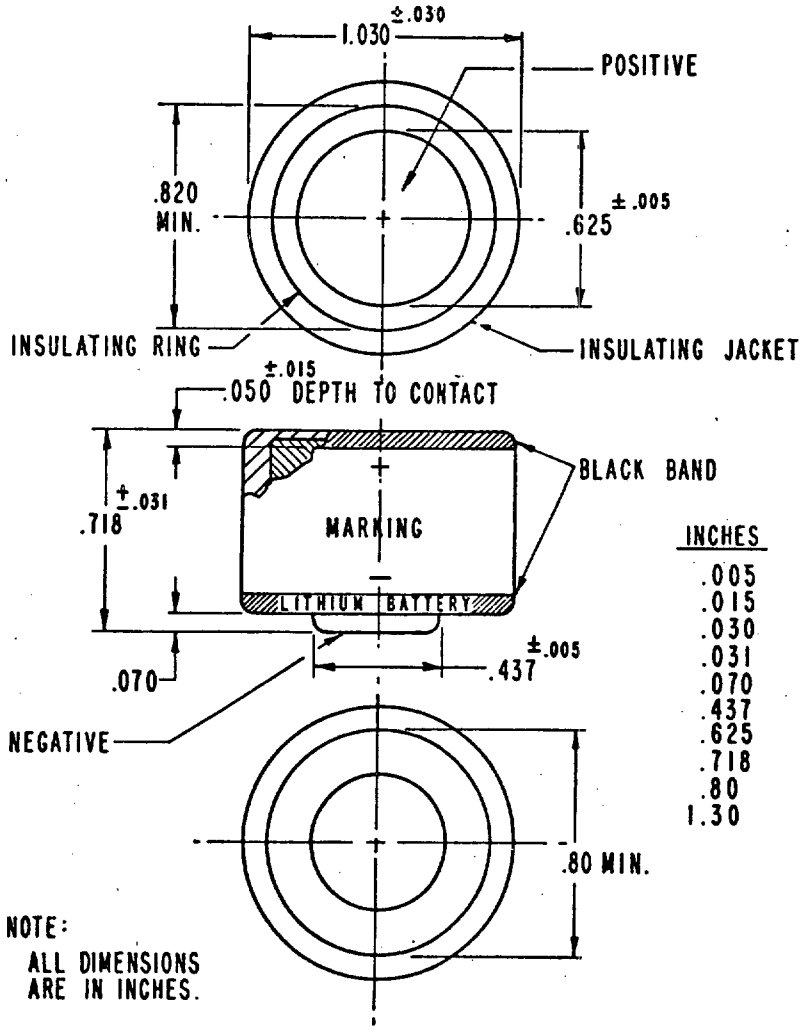

INCHES	MM
.005	.13
.015	.38
.030	.76
.031	.79
.070	1.78
.437	11.10
.625	15.88
.718	18.24
.80	20.32
1.30	33.02

FIGURE 1

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 3.05 volts. Minimum Voltage (for capacity): 2.00 volts.

Terminals: (See Figure 1).

Weight (maximum): 0.7 ounces (20 grams)

Fuse: No fuse is required.

High temperature switch. Not required.

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity Test	Battery Capacity in hours to 2.00 Volts
I	17
L	11
H	15
HT	13
LT	10
T	16
D	15
ILR	1000

Initial voltage delay: When the battery is subjected to the I, H, HT, T, D and ILR capacity tests, initial closed-circuit voltages below 2.00 volts cannot exceed a 5.0 second duration. For the L and LT capacity tests initial closed-circuit voltages bwlow 2.00 volts cannot exceed a 10.0 second duration.

METHOD OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage: Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge: Discharge current shall be 50mA constant current except for the ILR test which shall be through a fixed resistance of 4000 ohms.

Source: https://assist.dla.mil --Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

Closed circuit voltage: Load resistance of 20 ohms shall be used. Voltage shall be above two volts within five seconds.

Note 1: Two circumferential black bands shown on Fig 1 satisfy the requirement of Para 3.14.2, Special Marking. The term "LITHIUM BATTERY" is not required.

CUSTODIAN:
ARMY-ER

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6135-A157)

Source: https://assist.dla.mil - Downloaded: 2026-02-20T05:22:57Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982-505-022/57 2-1