MIL-D-52462A(ME)
26 April 1971
SUPERSEDING
MIL-D-52462(MO)
23 September 1965

MILITARY SPECIFICATION

DRIVER, DECK PIN

1. SCOPE

1.1 This specification covers a pin driver used in the erection and dismantling of the class 60 floating bridge.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

Military

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-l29	- Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5420

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

A120 - Black and Hot-Dipped Zinc-Coated (Galvanized) Welded and Seamless Steel Pipe for Ordinary Uses.
A576 - Special Quality Hot-Rolled Carbon Steel Bars.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, N.Y. l0017.)

AMERICAN WELDING SOCIETY

A5.1 - Mild Steel Covered Arc-Welding Electrodes.
A5.18 - Mild Steel Electrodes for Gas metal-Arc Welding.
B3.0 - Standard Qualification Procedure.
D2.0 - Welded Highway and Railway Bridges.

(App1ication for copies should be addressed to the American Welding Society, 345 East 47th Street, New York, N.Y. 10017.)

UNIFORM CIASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The pin driver shall be as shown in figure 1 and as specified herein.

3.2 First article (preproduction model). The supplier shall furnish one pin driver for examination within the time frame specified, to prove prior to starting production, that his production methods will produce pin drivers that comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein and as shown on the figure. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3.1 Steel bar. Steel bars shall conform to ASTM A576, grade designation 1030, and shall have a minimum Rockwell hardness of B90.

3.3.2 Steel pipe. Steel pipe shall conform to ASTM A120, hot-dipped galvanized, seamless, standard weight, except that the hydrostatic test is not required and the ends shall not be threaded.

3.4 Welding electrodes. Welding electrodes shall conform to AWS A5.1 or A5.l8, classification E60 or E70 series, size as required.

3.5 Identification marking. The pin driver shall be metal-die stamped as shown on the figure.

3.6 Treatment and painting. The pin driver shall be treated and painted in accordance with MIL-T-704, type B.

3.7 Workmanship

3.7.l Steel fabrication. Steel may be cut by shearing, sawing, or flame cutting. Burned surfaces of flame-cut material shall be ground or machined to remove cooling checks. All burrs shall be removed.

3.7.2 Welders and welding.

3.7.2.1 Welders. Before assigning any welder to manual welding work covered by this specification, the supplier shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

materials joined and the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

Standard Qualification Procedures of the American Welding Society (B3.0).
Welding Qualifications of the ASME Boiler and Pressure Vessel Code (Section IX).

3.7.2. 2 Welding. The surfaces of parts to be welded shall be free from scale, paint, grease, and other foreign matter. Welding shall be done by the shielded metal-arc or gas metal-arc (MIG) process and shall conform to the provisions of the American Welding Society publication "D2.0 - Welded Highway and Railway Bridges ". All welded parts shall be free from cracks and other imperfections that may reduce the effectiveness of the part. Work shall be positioned for flat welding when practicable. Before welding over previously deposited weld metal, all traces of slag shall be removed and the deposit and adjoining base metal shall be wirebrushed clean.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2. Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction pin driver shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.5 Inspection procedure.

4.5.1 Examination. The pin driver shall be examined for the following defects:

Major

101. Nonconformance to the dimensions shown on the figure.
102. Material not as specified.
103. Workmanship not as specified.

Minor

201. Identification marking incorrect, missing or illegible.
202. Treatment and painting not as specified.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

104. Containers not as specified for level A or B. Each incorrect container shall constitute one defect.
105. Drivers not secured in box in a manner to prevent movement for level A or B.
106. Gross weight exceeds the box specification limitation for level A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

107. Strapping not zinc coated for level A.
108. Closure and strapping not as specified for level A or B.
109. Marking missing, illegible, incorrect, or incomplete.

5. PREPARATION FOR DELIVERY

5.1. Packing. Packing shall be level A, B, or C as specified.

5.1.1 Level A. The drivers shall be packed together in a close-fitting box conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional, in quantities not to exceed the weight limitations of the applicable box specification. The drivers shall be blocked, braced, and anchored within the box in a manner to prevent movement. The box shall be closed and strapped in accordance with the appendix to the applicable box specification. Strapping shall be zinc coated.

5.1.2 Level B. Drivers shall be packed as specified in 5.1.1 for level A except boxes shall be domestic type or class as applicable and strapping need not be zinc coated. As an alternate, the drivers shall be packed in a close-fitting box conforming to PPP-B-640, class 2, style D, with a No. 4 end, in quantities not to exceed the weight limitation of the box specification. The drivers shall be secured in a manner to prevent movement. Closure shall be with nails as specified in the appendix to the box specification. Strapping shall be flat steel applied in accordance with the appendix to the box specification.

5.1.3 Level C. The drivers shall be packed in a manner to assure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.2 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The pin driver is intended for use in facilitating removal of pins for dismantling the class 60 floating bridge or for operation of raft ramp approaches.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the preproduction model (see 3.2).
(c) Level of packing required (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

6.3 Preproduction model. Any changes or deviations of production pin drivers from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish pin drivers conforming to this specification.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 5420-A221

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.

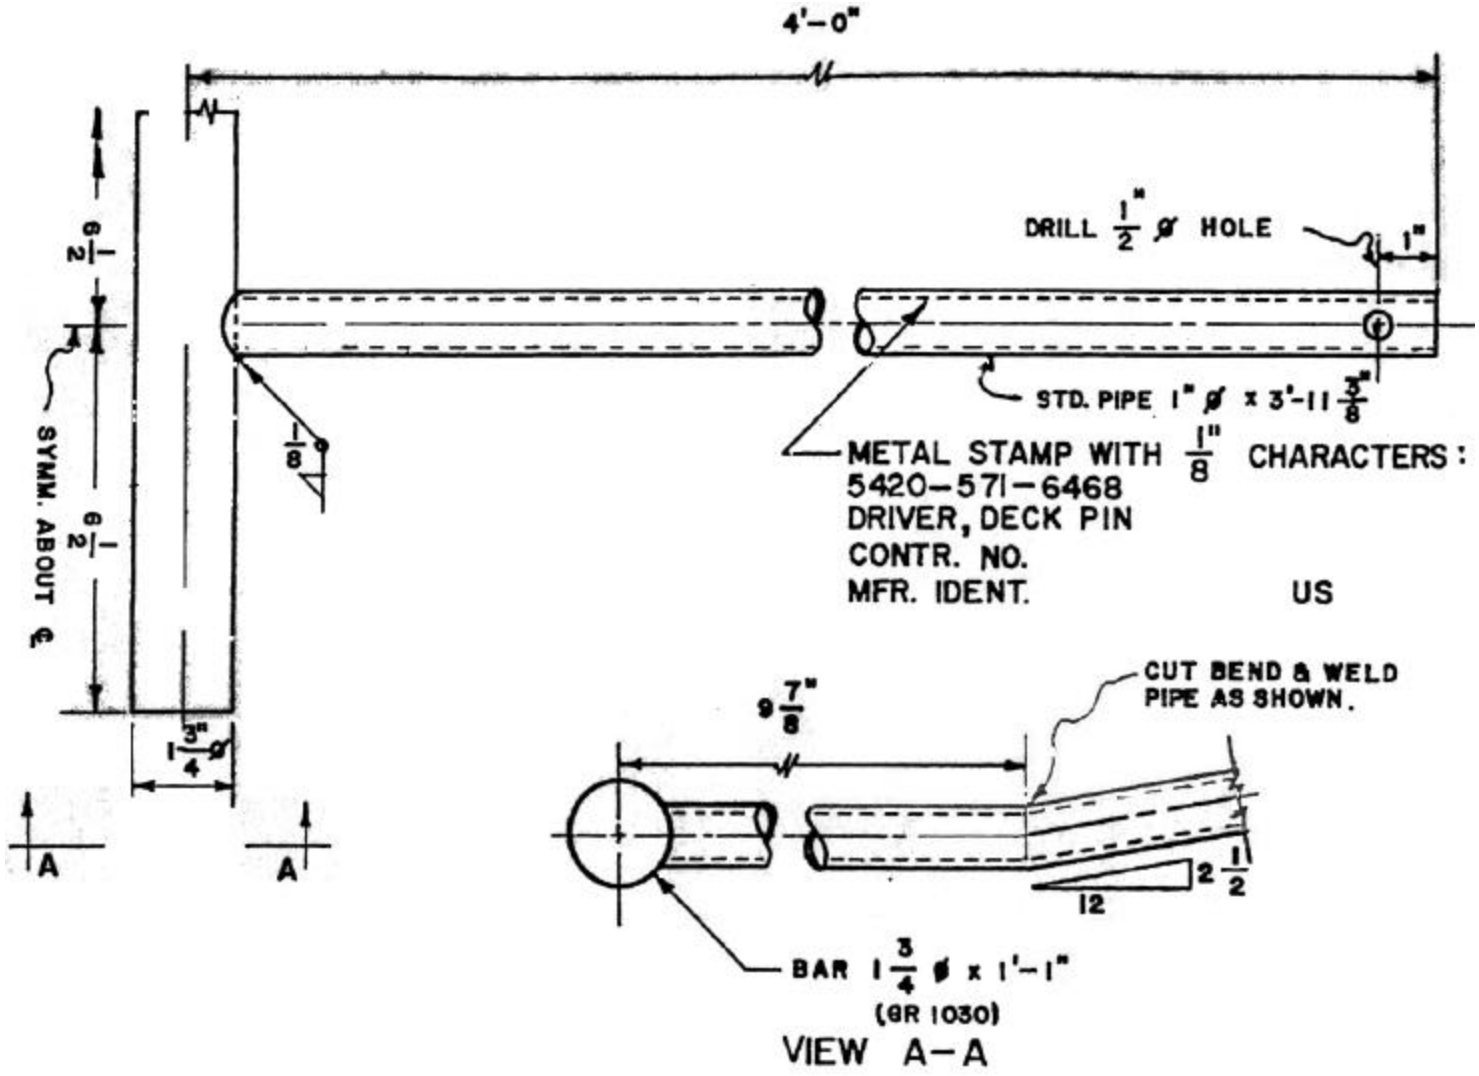


FIGURE 1 — DRIVER, DECK PIN X-2114

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:19Z
Check the source to verify that this is the current version before use.