INCH-POUND

MIL-DTL-9419F
1 June 2001
SUPERSEDING
MIL-S-9419E
10 March 1989

DETAIL SPECIFICATION

SWITCH, TOGGLE, MOMENTARY, FOUR-POSITION ON, CENTER OFF,
GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a four-positions, momentary on , center off, positive action switch with free return to the off position.

1.2 Classification. Switches covered by this specification will be classified by type as indicated herein (see 3.1).

Type I - Snap action, positive break operation.
Type II - Nonpositive break operation.

2 APPLICABLE DOCUMENTS

2.1 Governments documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-DTL-9419/2 - Switches, Toggle, Four Position On, Momentary, Center Off (.600 DIA).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

* STANDARDS

MILITARY

MIL-STD-202 - Test Methods for Electronics and Electrical Component Parts.
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines.
MS27708 - Switch, Toggle, Four Position On, Center Off.

* HANDBOOKS

DEPARTMENT OF DEFENSE

MILITARY

MIL-HDBK-454 - General Guidelines for Electronic Equipment.
MIL-HDBK-831 - Preparation of Test Reports.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issue of the documents which are DoD adopted are those listed in the issue of the DODISS not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

* AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/NCSL Z540-1 - General Requirements for Calibration Laboratories and Measuring and Test Equipment.

(Application for copies should be addressed to the American National Standards Institute (ANSI), 11 West 42nd Street, New York, NY 10036-8002, telephone 212-642-4900, fax 212-302-1286.

* SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE-AS50881 - WIRING, AEROSPACE VEHICLE

(Application for copies of SAE publications should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warren, PA 15096-0001).

UNDERWRITERS' LABORATORIES (UL), INC.

UL94 - Test for Flammability of Plastic Materials for Parts in Devices and Appliances.

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 333 Pfingsten Road, Northbrook, IL 60062. Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this document will takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3.0 REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 Qualification. Switches furnished under this specification, shall be products which are authorized by the qualifying activity for listing on the applicable qualified products list at the time of award of contract (4.5 and 6.4).

3.3 Material. Material shall be as specified herein. When a definite material is not specified, a material shall be used which shall enable the switches to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guarantee of acceptance of the finished product.

3.3.1 Metals. All metal parts, other than current-carrying parts, shall be of corrosion-resistant material, or shall be suitably plated to resist corrosion.

3.3.1.1 Ferrous material. Ferrous material shall not be used for current carrying parts.

3.3.1.2 Dissimilar metals. When dissimilar metals are used in intimate contact with each other, protection against electrolysis and corrosion shall be provided. The use of dissimilar metals which, in contact, tend toward active electrolytic corrosion (particularly brass, copper, or steel used in contact with aluminum or aluminum alloy) is not acceptable. However, metal plating or metal spraying of dissimilar base metals to provide similar or suitable abutting surfaces is permitted. The use of dissimilar metals separated by a suitable insulating materiel is also permitted. Dissimilar metals are defined in MIL-HDBK-454 guideline 16.

3.3.2 Insulating material. Molded material shall be used. Cellulose-filled phenolic shall not be used.

3.3.2.1 Plastic. The plastic material used in all external switch parts and enclosures shall be tested in accordance with UL94 and classified as 94V-0; this requirement applies to all materials for external parts and enclosures regardless of whether the material used is procured to a detail specification or not.

3.3.3 Protective treatment. Materials that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip or scale with age or extremes of climatic and environmental conditions shall be avoided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

3.4 Interface and physical dimensions. Switches shall be of sufficiently rugged construction to meet the requirements of this specification. Switches shall be direct acting, normally open type incorporating a positive action to assure good contact and snap feel with quick-make and quick-break circuits. Switches shall be designed to permit manual centering to the “off” position which shall permit breaking of welded contacts. Switches shall be constructed to assure free return of the movable contact member to the neutral “off” position when relieved of any external actuation forces. Switches shall not permit dual contact in any possible position of the lever. Movement of the actuating lever shall close the circuit between the common terminal and each other terminal in the direction of lever travel, as indicated in the circuit diagram of the MS sheet or detail specification sheets.

3.4.1 Dimensions. Switches shall conform to the dimensions shown on the MS sheet or detail specification sheets.

3.4.2 Mounting. Switch shall be operable when mounted in any attitude.

3.4.3 Stationary contact members and terminals. Stationary contact members and terminals shall be of such construction to meet the requirements of the specification. When terminals and contact members are separate pieces they shall be joined in a secure manner. All terminals shall be external and shall be treated to facilitate soldering. Silver plating shall not be used. Gold plating is allowable up to a thickness of .000030 inch to .000100 inch.

3.4.4 Cap. A cap of insulating material shall be fixed on the end of the actuating lever so that it cannot be readily removed and shall not rotate relative to the switch.

3.4.5 Electrical ratings. As specified (see 3.1)

3.4.6 Screw threads. Screw threads shall be as specified on the specification sheet.

3.5 Performance.

3.5.1 Actuating force. When switches are tested as specified in 4.7.3, the actuating force shall be within the limits specified (see 3.1)

3.5.2 Actuating lever travel. When switches are tested as specified in 4.7.4, the actuating lever travel shall be as specified.

3.5.3 Strength of actuating lever pivot, lever stop and cap. When switches are tested as specified in 4.7.5, there shall be no breakage of the cap or body, loosening or rotation of terminals or other damage to the switch.

3.5.4 Strength of terminals. When switches are tested as specified in 4.7.6, there shall be no short circuit, breakage, loosening, rotation of terminals or other damage to the switch.

3.5.5 Electrical overload. When switches are tested as specified in 4.7.7, there shall be no electrical or mechanical damage.

3.5.6 Electrical endurance. When switches are tested as specified in 4.7.8, switch contacts under test shall open and close the circuit in proper sequence during each cycle of the switch actuating member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

3.5.7 Temperature rise. When switches are tested as specified in 4.7.9, the temperature rise shall not exceed 30 degree Celsius.

3.5.8 Dielectric withstanding voltage. When switches are tested as specified in 4.7.10, the switches shall withstand the application of the specified voltages without arcing, flashover, breakdown of insulation, or damage; there shall be no current leakage in excess of 1 milliampere.

3.5.9 Vibration. When switches are tested as specified in 4.7.11, there shall be no separation of closed contacts or closure of open contacts having a duration exceeding 10 microseconds. There shall be no evidence of damage.

3.5.10 Shock. When switches are tested as specified in 4.7.12, the opening or closing of contacts shall not exceed 10 microseconds.

3.5.11 Acceleration. When switches are tested as specified in 4.7.13, there shall be no closure of open contacts.

3.4.12 Moisture resistance. When switches are tested as specified in 4.7.14, there shall be no electrical or mechanical failures and the switches shall meet dielectric withstanding voltage test specified herein.

3.5.13 Thermal shock. When switches are tested as specified in 4.7.15, there shall be no electrical or mechanical damage.

3.5.14 Altitude. When switches are tested as specified in 4.7.16, there shall be no electrical or mechanical damage.

3.5.15 Salt spray. When switches are tested as specified in 4.7.17, there shall be no electrical failures, or breaking, spalling, cracking, or loosening of terminals.

3.5.16 Fungus. When switches are tested as specified in 4.7.18, there shall be no electrical or mechanical damage. This test may be waived by the preparing activity provided suitable evidence is provided that all materials used are non-nutrient, i.e., fungus inert or treated.

3.5.17 Solderability (applicable to solderable terminations).

3.5.17.1 When switches with solid wire terminations of .045 maximum diameter or stranded wire terminations of number 18 AWG or smaller are tested as specified in 4.7.19, the dipped surface of the termination:

a. Shall be at least 95 percent covered by a continuous new solder coating.
b. Shall not have pinholes or voids that are concentrated in one area or that exceed 5 percent of the total area.

3.5.17.2 When switches with solder terminals, solid wire terminations greater than .045 diameter, and stranded wire terminations larger than number 18 AWG are tested as specified in 4.7.19, the dipped surface of the terminations:

a. Shall have 95 percent of the total length of the filet, which is between the standard wire wrap and the termination, tangent to the surface of the termination being tested and shall be free from pinholes and voids.
b. Shall not have a ragged or interrupted line at the point of tangency between the filet and the termination under test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

3.5.18 Resistance to soldering heat (applicable to switches with solderable terminals) (not applicable to switches with integral lead wire terminals). When switches are tested as specified in 4.7.20, switches shall meet the switch resistance requirement, and there shall be no deformation or other damage at the conclusion of the test sequence.

3.5.19 Switch resistance. When measured as specified in 4.7.21, the switch resistance shall not exceed 25 milliohms initially and 40 milliohms after the mechanical endurance test. After electrical endurance, the switch resistance shall not exceed 1 percent of the load impedance using the electrical parameters of the electrical endurance test load. For switches with integral lead wires, the switch resistance shall be as specified (see 3.1).

3.6 Marking. Switches shall be marked in accordance with the following:

a. MS part number of Detail Specification sheet part number.
b. Switch manufacturer's name, trademark or code symbol.
c. Switch manufacturer's part number.
d. Date of manufacture; i.e., day, month, year.

3.7 Workmanship. Switches shall be processed in such a manner as to be uniform in quality and free from cracked or displaced parts or other defects which effect life, serviceability, or appearance. Switches shall have an all over smooth, high finish surface and shall be free from warpage, checks, blisters, projecting ridges or chips. Gate marks shall not be considered a defect.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1. Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Test equipment and inspection facilities. The contractor shall establish and maintain a calibration system in accordance with ANSI/NCSL Z540-1, ISO-10012-1, or equivalent system as approved by the qualifying activity

4.3 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.5).
b. Quality conformance inspection (see 4.6).

4.4 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test conditions specified in the "GENERAL REQUIREMENTS" of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

TABLE I Qualification inspection sequence.

Inspection	Requirement paragraph	Test method paragraph	Number of sample units to be tested
Group I			
Visual and mechanical inspection	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	
Resistance to soldering heat 1/	3.5.18	4.7.20	
Dielectric withstanding voltage	3.5.8	4.7.10	All
Switch resistance	3.5.19	4.7.21	
Switching characteristics	3.1	4.7.2	
Actuating force	3.5.1	4.7.3	
Actuating lever travel	3.5.2	4.7.4	
Group II			
Solderability	3.5.17	4.7.19	
Strength of terminals	3.5.4	4.7.6	
Strength of actuating lever pivot and lever stop	3.5.3	4.7.5	
Thermal shock	3.5.13	4.7.15	4
Shock	3.5.10	4.7.12	samples
Acceleration	3.5.11	4.7.13	
Vibration	3.5.9	4.7.11	
Moisture resistance	3.5.12	4.7.15	
Dielectric withstanding voltage	3.5.8	4.7.10	
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	
Switching characteristics	3.1	4.7.2	
Group III			
Salt spray	3.5.15	4.7.17	
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	2 samples
Switching characteristics	3.1	4.7.2	
Group IV			
Electrical overload	3.5.5	4.7.7	
Electrical endurance 2/	3.5.6	4.7.8	
Temperature rise	3.5.7	4.7.9	4
Switch resistance	3.5.19	4.7.21	samples
Dielectric withstanding voltage	3.5.8	4.7.10	
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	
Switching characteristics	3.1	4.7.2	
Group V			
Altitude	3.5.14	4.6.16	
Dielectric withstanding voltage	3.5.8	4.7.10	
Visual and mechanical examination	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	2 samples
Switching characteristics	3.1	4.7.2	

1/ Four samples units only.
2/ Two sample unit for normal electrical endurance and two sample units for high speed electrical endurance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

* 4.5 Qualification inspection. Qualification inspection shall be performed at a laboratory acceptable to the Government (see 6.4) on sample units produced with equipment and procedures normally used in production.

4.5.1. Test routine. Sample units shall be subjected to the qualification inspection specified in table I, in the order shown.

4.5.2. Failure. Failure in any examinations or test shall be cause for refusal to grant qualification.

4.5.3. Retention of qualification. To retain qualification, the contractor shall forward after initial qualification, at the conclusion of each succeeding 12 month period, a summary of the results of group A test performed during that period, indicating as a minimum the number of lots which have passed and the number which failed, and a summary of the group B test performed during that period. The contractor shall forward for each 36 month interval the complete results of group C test which shall be performed during the last 12 months of the interval. If the test results indicate nonconformance with specification requirements, action shall be taken to remove the failing product from the qualified products list. Failure to submit a report within 30 days after the end of each period may result in loss of qualification for the product. In addition to the periodic submission of inspection data, the contractor shall immediately notify the qualifying activity anytime during the applicable interval that the inspection data indicates failure of product to meet the requirements of this specification. In the event that no production occurred during the 12 month reporting interval, a report shall be submitted certifying that the company still has the capabilities and facilities necessary to produce the time. If the item has not been produced for 36 months, the product must be requalified.

4.5.4 Test reports. Test reports shall:

a. Be in accordance with MIL-HDBK-831.
b. Include all original data and charts as recorded in the laboratory.
c. Identify the plastic material used as well as conformance to specification requirements as required herein.
d. Be validated by the local DCASMA-QAR before submission to the qualifying activity.

4.6 Quality conformance inspections.

4.5.4 Test reports. Test reports shall:

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B inspection. Delivery of products which have passed group A shall not be delayed pending the results of group B inspection.

4.6.1.1 Group A inspection. Group A inspection shall consist of the inspections specified in table II. An inspection lot shall consist of all switches of the same design and construction, produced under essentially the same conditions, and offered for inspection at one time.

4.6.1.1.1 Sampling plan. Statistical sampling shall be in accordance with tables II and III. Separate, randomly selected groups of samples are required for subgroups 1 and 2. For acceptance of the lot there shall be zero occurrences of defects.

4.6.1.1.1.1 Subgroup 1. A sample of parts shall be randomly selected in accordance with table III, subgroup 1 sampling plan.

4.6.1.1.1.2 Subgroup 2. A sample of parts shall be randomly selected in accordance with table III, subgroup 2 sampling plan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.6.1.1.2 Rejected lots. If an inspection lot is rejected, the lot shall be 100 percent inspected for the defects noted. The contractor may correct all of the defects or remove all of the defective units from the lot. The lot shall then be sampled again in accordance with tables II and III. For acceptance, there shall be zero occurrences of defects. Such lots shall be separate from new lots and shall be clearly identified as reinspected lots. 4.6.1.2 Group B inspection. One switch shall be selected at random from each 1,000 switches produced and shall be subjected to the normal endurance test (see 4.7.8.1).

4.6.1.2.1 Disposition of sample units. Sample units which have been subjected to group B shall not be delivered on the contract or order.

4.6.1.2.2 Action in case of failure. The manufacturer shall immediately investigate the cause of failure and take corrective action to insure that subsequent switches do not contain the same defects.

TABLE II. Group A inspection.

Inspection	Requirement paragraph	Test method paragraph	Sampling plan
Subgroup 1 Visual and mechanical examination 1/	3.1, 3.3, 3.4, 3.6, 3.7	4.7.1	See 4.6.1.1.1.1
Subgroup 2 Actuating force Actuating lever travel Dielectric withstanding voltage Switching resistance	 3.5.1 3.5.2 3.5.8 3.5.19	 4.7.3 4.7.4 4.7.10 4.7.21	See 4.6.1.1.1.2

1/ At the option of the contractor, documented in-process inspection may be used to satisfy the materials (see 3.3) and design and construction (see 3.4) requirements provided that all of the contractor's in-process control data on these tests are made available to the Government upon request.

TABLE III. Zero defect sampling plan.

Lot size	Number of switches to be tested	
	Subgroup 1	Subgroup 2
1 - 8	5	All
9 - 15	5	13
16 - 25	5	13
26 - 50	5	13
51 - 90	7	13
91 - 150	11	13
151 - 280	13	20
281 - 500	16	29
501 - 1,200	19	34
1,201 - 3,200	23	42
3,201 - 10,000	29	50
10,001 - 35,000	35	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.6.2 Group C inspection. Group C inspection shall consist of the tests specified in table I in the order shown and shall be made on sample units produced with production tools and processes.

4.6.2.1 Disposition of sample units. Sample units which have been subjected to group C inspection shall not be delivered on a contract or order.

4.6.2.2 Noncompliance. if a sample fails to pass group C inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured with essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Groups A and B inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group C inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

4.7 Methods of examination and test.

4.7.1 Visual and mechanical examination. Switches shall be examined to verify that the design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1).

4.7.2 Switching characteristics. Each switch shall be cycled by hand five times through all positions, while carrying the rated inductive load. The test fixture shall have suitable provisions to show that the proper circuit is being closed and opened. The switch shall return to the center off position upon removal of the external actuating force.

4.7.3 Actuating force (see 3.5.1). The switch shall be horizontally mounted by its normal mounting means with the actuating mast in the horizontal plane and with a stationary contact down. Weight shall be hung on the cap. For group A inspection a suitable spring loaded fixture may be used. Unless otherwise specified (see 3.1), the switch shall actuate between 21 and 36 ounces and there shall be no short circuiting, breakage or damage to the switch. All four switch positions shall be measured.

4.7.4 Actuating lever travel (see 3.5.2). Switches shall be tested in a suitable fixture with an accuracy of at least ¼ degree. The actuating lever travel of 3 degree to 7 degree shall be required to make contact in each position and a minimum of 2 degree overtravel shall be required beyond the point of contact make. On the return stroke there shall be a minimum of 2 degree of lever travel between the point of breaking contact and the center off position. The differential between the point of make or break of the contacts and the snap feel shall not exceed ¼ degree for any one of the four directions of travel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.7.5 Strength of actuating lever pivot, lever stop and cap (see 3.5.3). Switches shall be electrically and mechanically operable after the following test and there shall be no breakage of the cap or body, loosening or rotation of terminals or other damage to the switch:

a. A minimum of 10 inch-pounds of torque shall be applied to the cap around the major axis of the switch.
b. A 90-pound load minimum shall be applied to the outer edge of the cap at an angle of 45 degree to the major axis of the switch in each of the four directions of travel.
c. A 90-pound load minimum shall be applied to the top of the cap coaxial with the major axis of the switch toward the actuating lever pivot.
d. A 2-pound load minimum shall be dropped from a minimum height of 8 inches and shall strike the cap. The switch shall be mounted with its major axis at an angle of 30 degree from vertical (see figure 1).

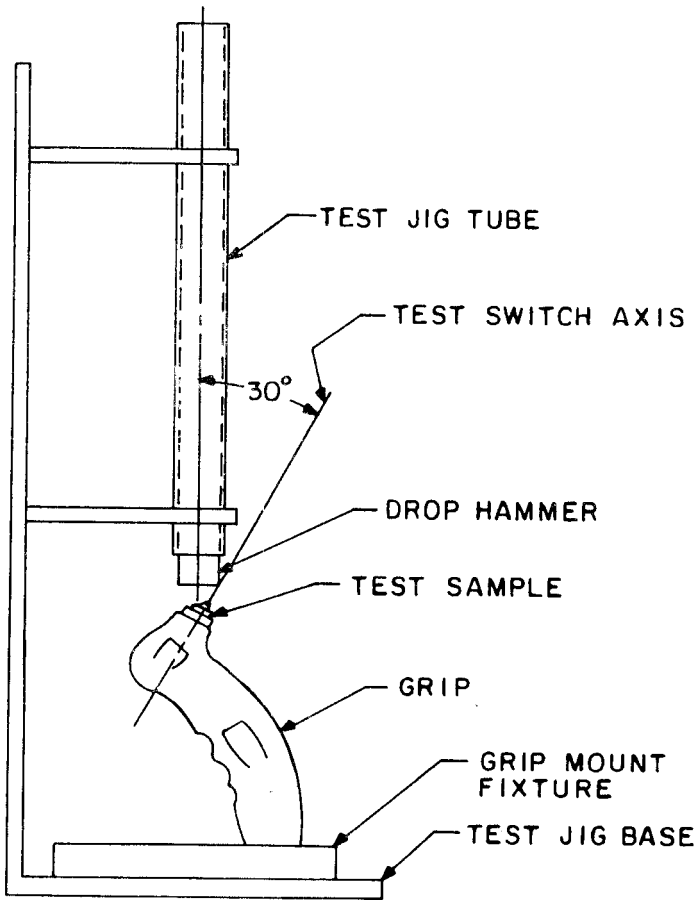


FIGURE 1. Suggested fixture, impact test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.7.6 Strength of terminals (see 3.5.4) A load of 30 pounds shall be applied to each terminal, perpendicular to each terminal, perpendicular to the mounting plane of the switch, for one minute. Upon completion of the test, switches shall be electrically and mechanically operable.

4.7.7 Electrical overload (see 3.5.5). Each switch to be tested for electrical endurance shall first be tested for overload cycling at room ambient conditions using the same voltage, electrical frequency, and the same pairs of contacts that will subsequently be used for the electrical endurance test. The switches shall close and open the overload current of a circuit equal to 150 percent of the load rating at the particular voltage and electrical frequency (see 3.1). The cycling rate shall be 5 to 6 cycles of operation per minute. 100 cycles of operation shall be performed. The duty cycle shall be approximately 50 percent on, and 50 percent off.

4.7.8 Electrical endurance (see 3.5.6). For dc inductive loads, inductors which meet the electrical performance requirements of MIL-I-81023 or equivalent shall be used.

4.7.8.1 Normal. The switches shall be operated to make and free break the inductive load specified, (see 3.1) for 250,000 cycles at a rate of between 28 and 32 operations per minute. The maximum ratio of the “time on” to “time off” shall be 1:3. Operating force following endurance testing shall be between 12 and 50 ounces. The actuation lever travel shall be within limits except that the ¼ degree differential may not be measurable due to the degradation of the snap feel. The following conditions shall apply, switches shall be continuously monitored and recorded to determine whether any contact has failed to open or close its individual circuit in the proper sequence. The monitoring circuit shall not shunt inductive components of inductive loads or switch contacts.

4.7.8.2 High speed. Switches shall be operated to make and free break the inductive load specified herein for 1,000 cycles at a rate of between 60 and 80 operations per minute. At all times during and at completion of the endurance test, switches shall be capable of making and free breaking the inductive circuit and returning to center off by its own action. Following the test the operating force and the actuation lever travel shall be within limits except that the ¼ degree differential may not be measurable due to the degradation of the snap feel.

4.7.9 Temperature rise (see 3.5.7). switches shall be equipped with suitable thermocouples and leads which shall be in accordance with SAE-AS50881. While carrying the inductive current specified herein, the temperature shall not rise more than 30 degree Celsius for one hour, thermocouples shall not be placed on the common terminal.

4.7.10 Dielectric withstanding voltage (see 3.5.8). switches shall be tested in accordance with method 301 of MIL-STD-202. The following details and exceptions shall apply:

a. Magnitude of test voltage: 1,000 volts.
b. Nature of potential: AC root mean square (rms).
c. Duration of application of test voltage: For group A inspection, at the option of the contractor, the test voltage may be applied for period of 5 seconds.
d. Points of application of test voltage: Between all unconnected terminals and between all load terminals connected together and common with the switch in the off position.
e. Measurements during test: Leakage current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.7.11 Vibration (see 3.5.9). switches shall be tested in accordance with method 201 of MILSTD202. The following details and exceptions shall apply:

a. Test and measurements prior to vibration: Not applicable.
b. Method of mounting: Switches shall be mounted in the normal manner on a rigid metal panel. The mounting fixture shall be free from resonance over the frequency range.
c. Electrical load conditions: The test circuit shall be in accordance with method 310 MILSTD202 and all contact positions shall be monitored.
d. Test and measurements during vibration: Switch-contact stability shall be continuously monitored during vibration by means of a test circuit in accordance with method 310 of MIL-STD-202.
e. Measurements after vibration: After the test, switches shall be examined for change in shaft position, and evidence of broken, deformed, displaced, or loose parts, and switches shall be electrically and mechanically operative.

4.7.12 Shock (see 3.5.10). Switches shall be tested in accordance with method 213 of MIL-STD.202. The following details and exceptions shall apply:

a. Mounting means: Switches shall be mounted in the normal manner.
b. Test condition A.
c. Electrical load conditions: Monitor circuit only.
d. Measurements during shock: Switch-contact stability shall be continuously monitored during shock by means of a test circuit in accordance with method 310 of MIL-STD-202, and all contacts shall be monitored.

4.7.13 Acceleration (see 3.5.11). Switches shall be subjected to an acceleration force of 10g attained within 2 minutes and shall be maintained for 1 minute in the plane most likely to cause malfunction. Switch contacts shall be monitored for closing with a circuit such as a pilot lamp.

4.7.14 Moisture resistance (see 3.5.12). Switches shall be tested in accordance with method 106 of MIL-STD-202. The following details and exceptions shall apply:

a. Mounting: By normal mounting means on a corrosion-resistant metal panel extending beyond the switch, positioned 15 degree from vertical and uninsulated. Half of the units shall be tested with the actuator in the upper side of the panel and the other half of the units shall be tested with the actuator on the under side of the panel.
b. Polarization: During steps 1 to 6 inclusive, a polarizing voltage of 100 volts dc shall be applied between all terminals tied together and the metal panel. the negative polarity shall be applied to the metal panel. steps 7a and 7b are not applicable.
c. Load voltage: Not applicable.
d. Final measurements: At the end of the drying period, dielectric withstanding voltage shall be measured as specified herein.
e. Examinations during final measurement and after test: Switches shall be examined for evidence of corrosion, breaking, cracking, or spalling. Hardware shall be removable at the end of the test.
f. Water: Steam, distilled or de-ionized water shall be used for this test.
g. Switches shall make and free break the rated inductive load for 500 cycles after completion of this test.

4.7.15 Thermal shock (see 3.5.13). Switches shall be subjected to a temperature of -65 Celsius ± 2 degree Celsius for 12 hours after which the temperature shall be raised to -55 degree Celsius ± 2 degree Celsius and maintained for 2 hours. While at -55 degree Celsius switches shall be mechanically cycled for 10 cycles. The temperature shall then be raised to +85 degree Celsius ± 2 degree Celsius for 36 hours. While at +85 degree Celsius, the switches shall be subjected to the overload test specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

4.7.16 Altitude (see 3.5.14). Switches shall be operated to make and free-break the inductive load specified (see 3.1) for 20,000 cycles at a rate of not less than 12 operations per minute at a pressure altitude of 60,000 feet. There shall be no mechanical or electrical failure or damage which would affect proper operation. The duty cycle shall be approximately 50 percent on and 50 percent off for resistive, inductive and motor loads. The duty cycle shall be approximately 30 percent on and 70 percent off for lamp loads.

4.7.17 Salt spray (corrosion) (see 3.5.15). Switches shall be tested in accordance with method 101 of MIL-STD-202. The following details shall apply:

a. Test condition A.
b. Measurements after exposure: Not applicable.
c. Switches shall make and free-break rated inductive load for 500 cycles after the completion of this test.

4.7.18 Fungus (see 3.5.16). Switches shall be subjected to procedure 1 of MILSTD810. At the conclusion of the test, after allowing a 24 hour drying period, switches shall be subjected to the dielectric withstanding voltage and then examined for electrical and mechanical damage and electrical continuity.

4.7.19 Solderability (see 3.5.17). Solder type terminations shall be tested in accordance with method 208 of MIL-STD-202. Minimum of two terminals per unit shall be tested.

4.7.20 Resistance to soldering heat (see 3.5.18) (applicable to switches with solderable terminals) (not applicable to switches with integral lead wire terminals). Switches shall be tested in accordance with method 210 of MIL-STD-202. The following details shall apply:

a. Depth of immersion: Terminals shall be immersed to within 0.05 inch of the switch body.
b. Test condition B.
c. Cooling time: Not applicable.
d. Inspections and measurements:
    (1) Before: None.
    (2) After: Subsequent to all applicable test of group I of table I, the switches shall be opened and inspected for deformation or other damage.

4.7.21 Switch resistance (see 3.5.19). Switch contacts shall be tested in accordance with method 307 of MIL-STD-202. The following details shall apply:

a. Measurements shall be made between the terminals, forming a switching circuit. Measurements shall be made for all poles in a switch at each of the actuators extreme positions.
b. Test current: 0.1 amperes. After electrical endurance, use the electrical parameters of electrical endurance test load (this also applies to 4.7.21c).
c. Open-circuit test voltage: 6 ±1 V dc.
d. Number of actuations prior to measurement: Three.
e. Number of test actuations: Threes.
f. Number of measurements per actuation: One.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Department or Defense Agency, or within the Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but not mandatory)

6.1 Intended use. The switches covered by this specification are intended for mounting in aircraft control wheels and grips and serves as the electrical trim tab control. However, it may be used in other applications, provided the perameters set forth herein are not exceeded.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Detail specification sheet part number.

6.3 Definitions.

6.3.1 Operation. An operation consists of a mechanical actuation of the toggle lever from the “center off” to one “on” position and free return of toggle lever to “center off”.

6.3.2 Cycle. A cycle consists of mechanical actuation of the toggle lever from the “center off” after each “on” position in consecutive rotation, in order that contact is made in each of the four positions during each cycle.

6.3.3 Free break. After mechanical actuation to make the circuit, the toggle lever will return to “center off” position by its own action, thus breaking the circuit.

NOTE: Any sticking of the lever in “on” position constitutes failure.

6.3.4 Direct acting and positive action. The use of these terms in this specification will mean the direct attachment to the actuator lever or direct manual control of the common contact rather than dependence upon an intermediate spring or toggling member between the actuator and moving contact to effect opening or closing of the circuit.

6.3.5 Snap/Tactile feel force characteristic. The switch assembly will incorporate an actuator travel dependent-actuation restraining force characteristic which provides both a positive tactile feedback to the user when electrical activation of the switch has been achieved and a restraining force threshold to prevent unintentional activation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

* 6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time set for opening of bids, qualified for inclusion in Qualified Products List (QPL 9419) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. The activity responsible for the Qualified Products List is Defense Supply Center, Columbus, ATTN: DSCC-VQP, 3990 East Broad Street, Columbus, OH 43216-5000, and information pertaining to qualification of products may be obtained from that activity.

6.4.1 Provisions Governing Qualification. Copies of "Provisions Governing Qualification" may be obtained upon application to Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

6.5 Subject term (key word) listing.

Snap action
Positive break
Positive action

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Navy - AS
Army -AV
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1718)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-9419	**2. DOCUMENT DATE** *(YYYYMMDD)* 2001/06/01

3. DOCUMENT TITLE
SWITCH, TOGGLE, MOMENTARY, FOUR-POSITION ON, CENTER OFF, GENERAL SPECIFICATION FOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include ZIP Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	**7. DATE SUBMITTED** *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Supply Center, Columbus ATTN: DSCC-VAT	b. TELEPHONE *(Include Area Code)* (1) Commercial (614)692-0551 (2) DSN 850-0551
c. ADDRESS *(Include ZIP Code)* Post Office Box 3990 Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:53Z
Check the source to verify that this is the current version before use.