INCH-POUND


MIL-S-9419/2D
26 June 1995
SUPERSEDING
MIL-S-9419/2C(USAF)
12 June 1991

MILITARY SPECIFICATION SHEET

SWITCHES, TOGGLE, FOUR POSITION ON, MOMENTARY, CENTER OFF
(.600 DIA)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-9419.

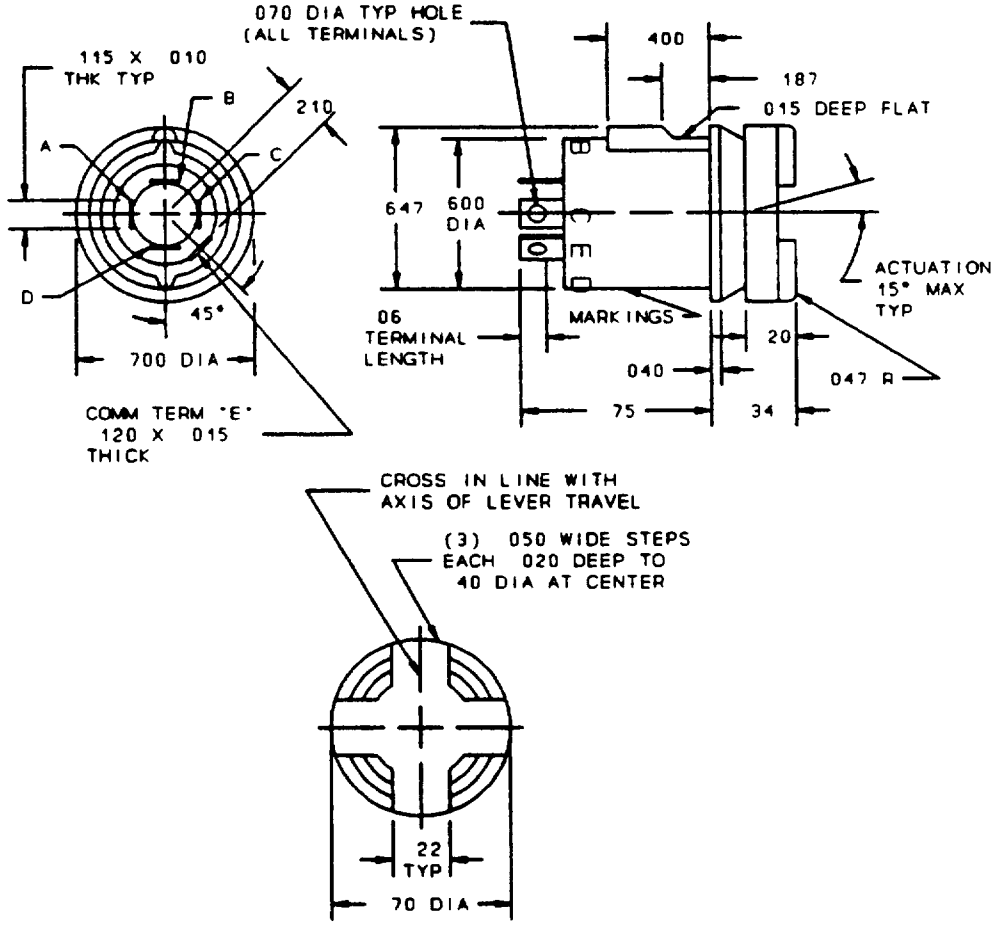


Toggle style A

(D) FIGURE 1. Dimensions and configurations.


(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

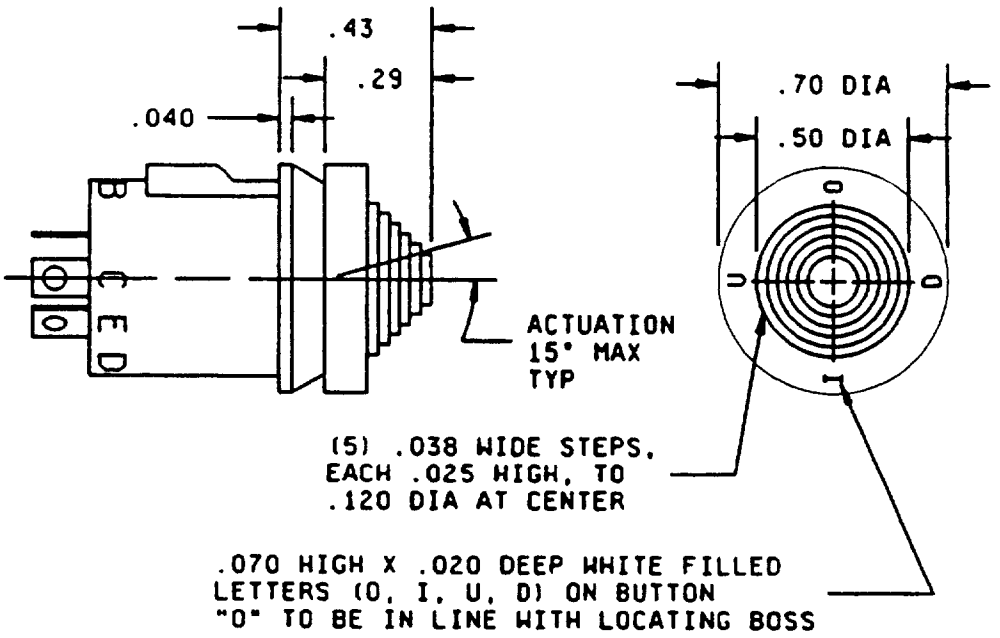


Toggle style B

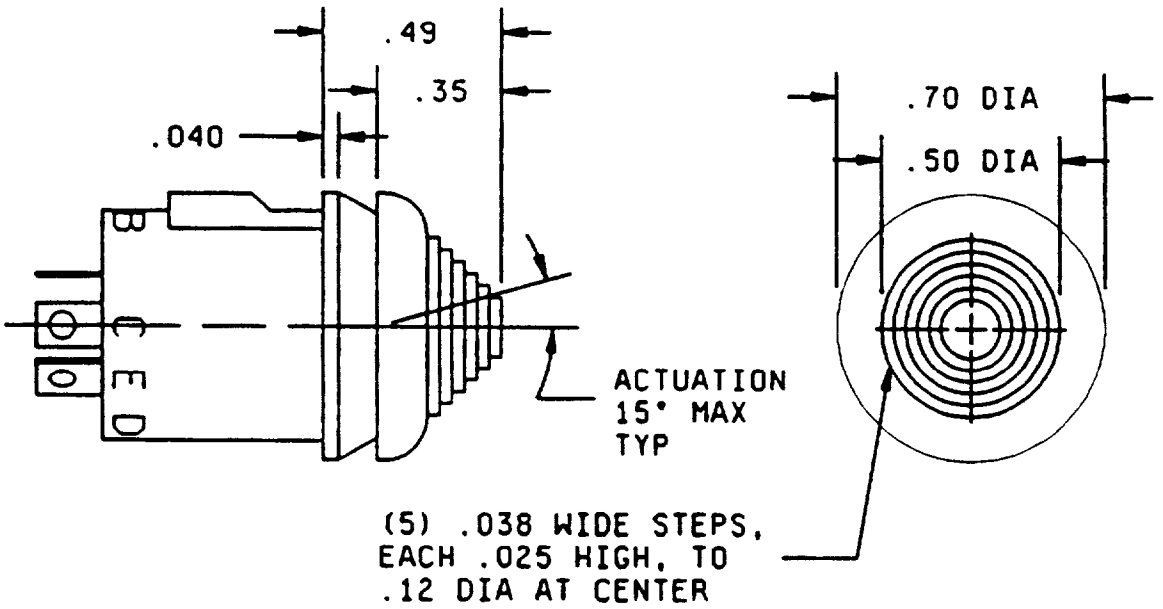


Toggle style C

(D) FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

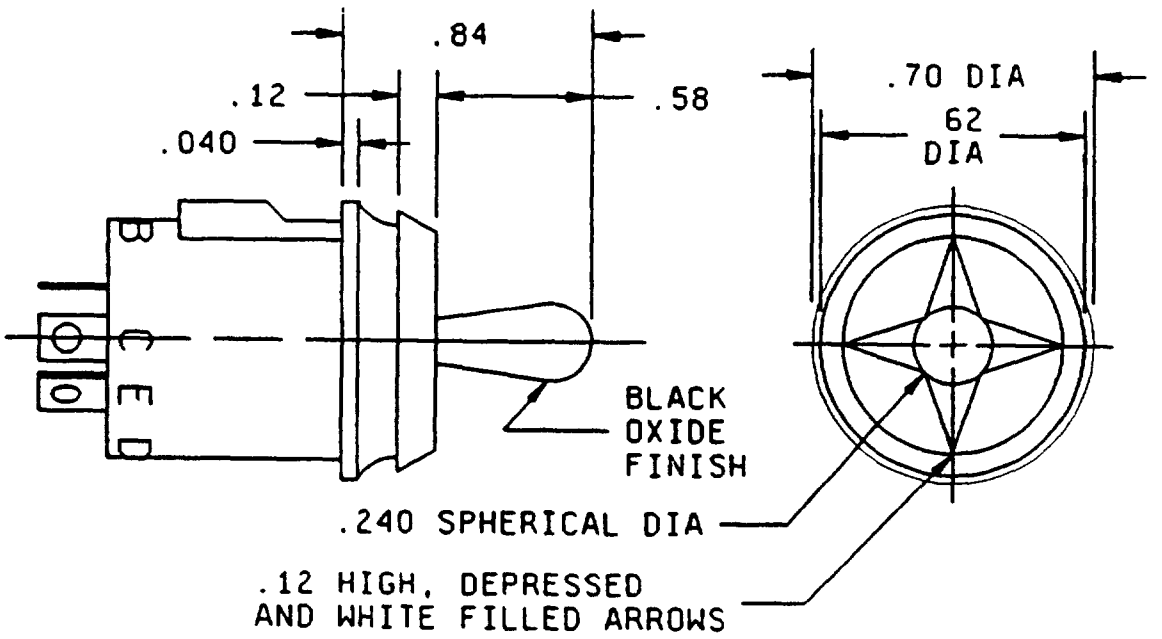


Toggle style D

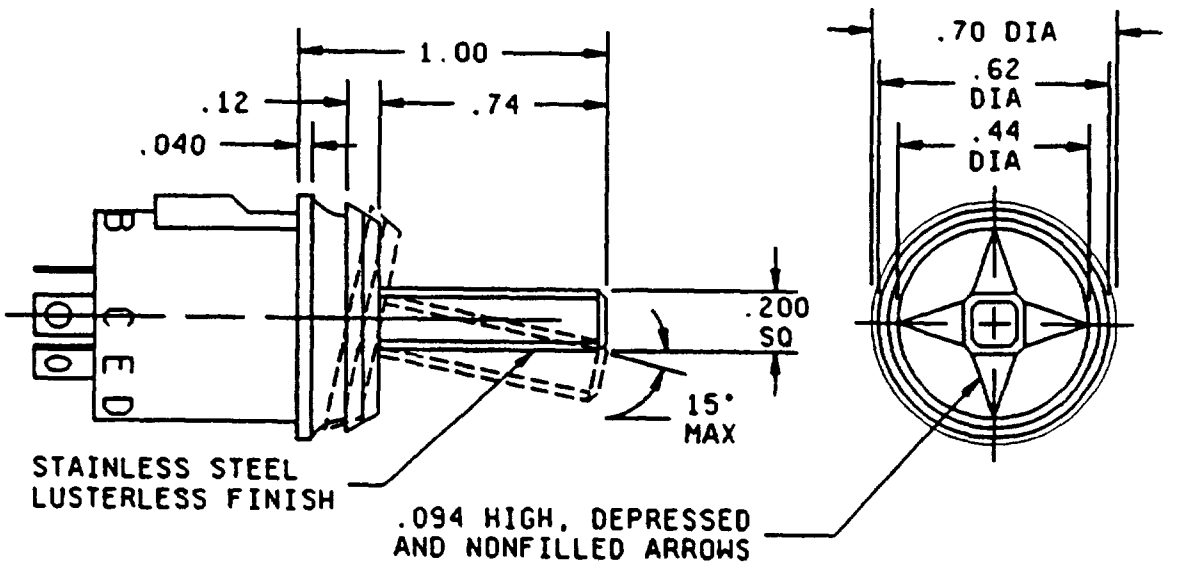

Toggle style E

(D) FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

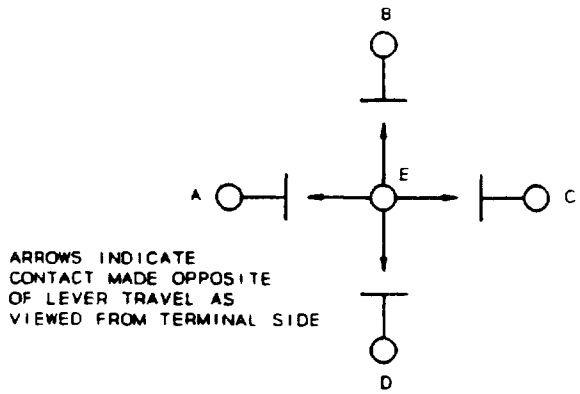

SCHEMATIC

Inches	mm	Inches	mm
.015	0.38	.240	6.10
.020	0.51	.255	6.48
.025	0.64	.295	7.49
.030	0.76	.340	8.64
.034	0.86	.350	8.89
.038	0.97	.400	10.16
.040	1.02	.430	10.92
.046	1.17	.440	11.18
.047	1.19	.490	12.45
.050	1.27	.500	12.70
.070	1.78	.580	14.73
.100	2.54	.600	15.24
.115	2.92	.618	15.70
.120	3.05	.625	15.88
.125	3.18	.647	16.43
.187	4.75	.700	17.78
.200	5.08	.740	18.80
.220	5.59	.750	19.05
		.840	21.34
		1.000	25.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.03 (0.76 mm) for two place decimals and ±2 degrees on angles.
4. Housing and actuator color: Black, except for white markings as required on toggle styles B and D.

(D) FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: No snap feel, no manual breaking of welded contacts, contacts close in opposite direction of travel.

Dimensions and configuration: See figure 1.

Actuating lever: Two-piece metal mast with spring loaded electrical conductivity from the common terminal to the actuating lever.

Electrical ratings: 1 ampere inductive at 28 V dc. Derated 50 percent at altitude (60,000 feet).

(D) Actuating force: 16 ounces ±6 ounces (10 ounces ±3 ounces for style D).

Actuating lever travel: 15 degrees maximum from center.

Strength of actuating lever pivot, lever stop, and cap:

5 inch-pound torque.
50-pound load at 45 degrees (20-pound load at 45 degrees for styles D and E).
50-pound load to top of cap.
8-ounce drop at 4 inches.

Strength of terminals: 15 pounds.

Electrical endurance: Normal: 25,000 cycles.

Electrical overload: 2 amperes at 28 V dc for 100 cycles.

Seal: Part or Identifying Numbers (PIN) MIL-S-9419/2-002, -003, and -005 shall be tested in accordance with method 112, MIL-STD-202, test condition C, leakage rate sensitivity (1×10^{-6} atm cc/s) and procedure I, II, III, or IV. For qualification, specimen numbers 3 and 4 shall be tested following acceleration (see table I).

Altitude: Except derate inductive load by 50 percent.

PIN: The PIN shall consist of the prefix M9419/2 followed by the appropriate three-digit dash number from table I.

Example: M9419/2-002 is a four position toggle, with style A cap and additional sealing.

TABLE I. Dash numbers.

Dash number M9419/2-	Cap style	Additional sealing in accordance with MIL-STD-202, method 112
-001	A	
-002	A	X
-003	B	X
-004	C	
-005	D	X
-006	E	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Air Force - 85
Navy - EC

Review activity:
Air Force - 99

Preparing activity:
DLA - ES

(Project 5930-D762)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.