
MILITARY SPECIFICATION SHEET

SWITCHES, TOGGLE, FOUR POSITION ON,
MOMENTARY, CENTER OFF DOUBLE POLE PER THROW

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specifications listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-9419

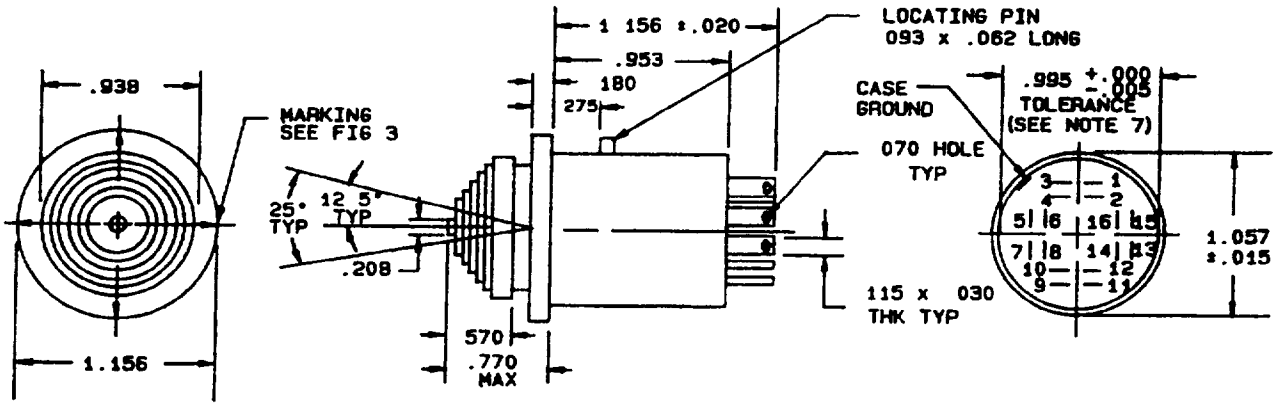


Configuration A

FIGURE 1. Dimensions and configurations

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

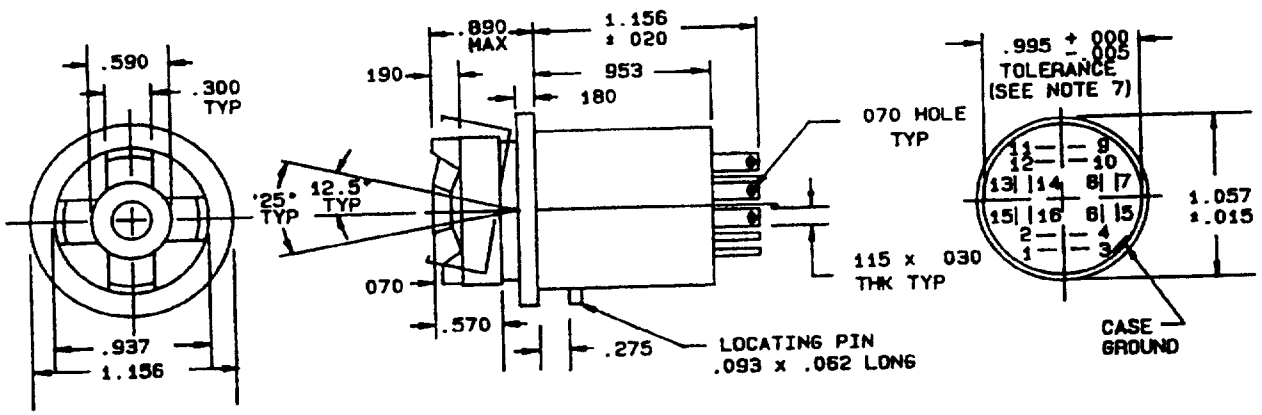

Configuration B

FIGURE 1 Dimensions and configurations - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

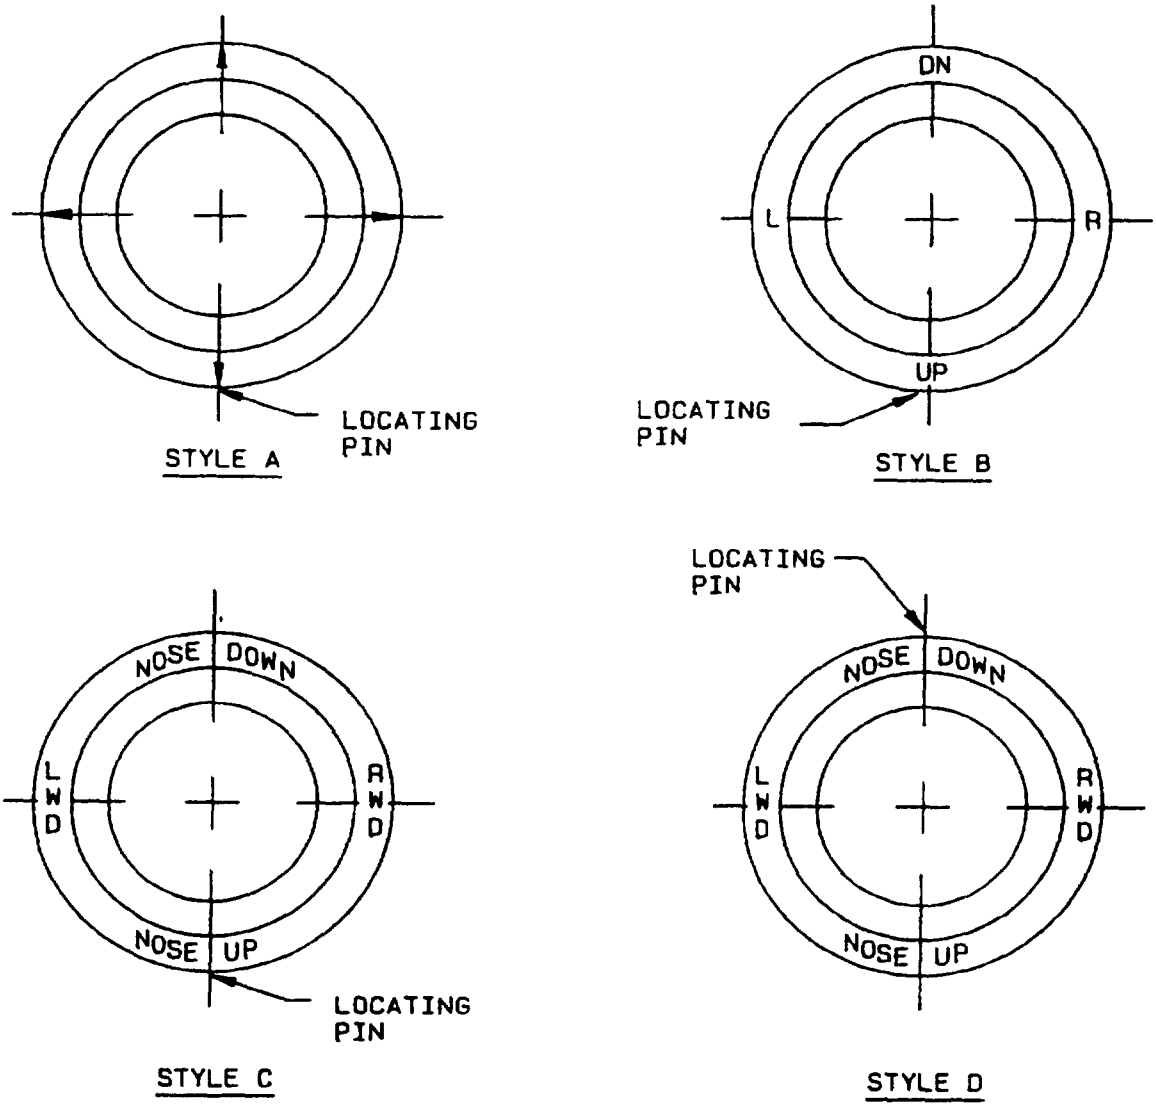

Locating pin and case legends

FIGURE 1. Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

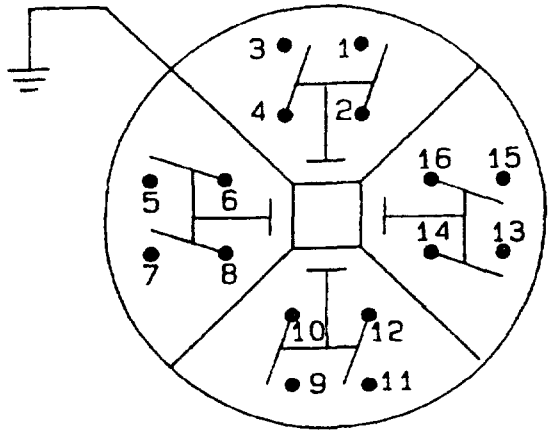

Circuit configuration

Inches	mm	Inches	mm
.005	0 13	435	11 05
.010	0 25	.570	14.48
.015	0.38	590	14 99
.020	0.51	625	15 88
030	0 76	770	19.56
.062	1 57	890	22.61
.093	2 36	.937	23.80
.115	2 92	938	23.83
180	4 57	953	24.21
190	4 83	995	25.27
208	5 28	1 056	26 82
.275	6.99	1.057	26.85
.300	7.62		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are .01 (0.3 mm) for two place decimals and 1° on angles.
4. Housing color: Black, except for white case legend markings as required
5. Case legend height: .14 maximum.
6. Terminal identification as shown is for reference only Actual terminal identification location is optional.
7. Tolerance applies to the 995 inch diameter within .000 to 625 inch of the mounting plane. Tolerance past .625 inch is +.000, -.010.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: No manual breaking of welded contacts, contacts close in opposite direction of travel

Case material: Black anodized aluminum.

Dimensions and configurations: See figure 1 and figure 2

Actuating lever: One piece noncurrent carrying mast with a spring loaded actuator, when toggled into any one of four positions, closes two independent, normally open contacts.

Electrical ratings: See table I

Actuating force: 28 ±8 ounces to be applied perpendicular to the longitudinal axis of the center of the button

Actuating lever travel: 12.5 degrees typical from center

Strength of actuating lever pivot, lever stop, and cap

5 inch-pound torque
50-pound load at 45 degrees.
50-pound load to top of cap
8-ounce drop at 4 inches.

Strength of terminals: 15 pounds.

Electrical endurance: 100,000 cycles.

Electrical overload: Not applicable.

Acceleration: Not applicable

Seal: Resilient in accordance with MIL-S-8805 to be performed during group A inspection (see table II) after temperature rise in group IV of MIL-S-9419 qualification inspection table

Altitude: 70,000 feet.

Random vibration level: Not applicable.

Group A inspection performed: In accordance with table II.

TABLE I. Electrical ratings

Load	Altitude		Electronic logic 5 V dc
	Sea level 28 V dc	70,000 feet 28 V dc	
Resistive	5 amperes	2.5 amperes	0.01 amperes
Inductive	3 amperes	1.5 amperes	


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

TABLE II Group A inspection

Examination or test
Resilient seal 1/
Visual and mechanical examination
Actuating force
Dielectric withstanding voltage
Contact resistance

1/ 100 percent inspection. In-process inspection may be used to satisfy this requirement

Part or Identifying Number (PIN) The PIN shall consist of the prefix M9419/3 followed by the appropriate three-digit alpha code letter from figure 1 and tables III and IV

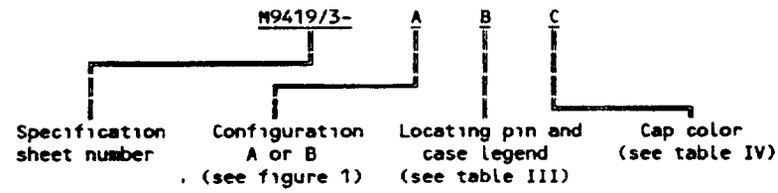

Example M9419/3-ABC is a four position toggle, of configuration A, case legend and locating pin style B, with an orange cap

TABLE III. Locating pin and case legend.

Code letter	Case legend style
A	A
B	B
C	C
D	D

TABLE IV Cap color

Code letter	Cap color
A	Red
B	Black
C	Orange
D	Yellow
E	Green
F	Blue
G	Purple
H	Grey
J	White

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian
Air Force - 85

Preparing activity
Air Force - 85

Agent.
DLA - ES

(Project 5930-F687)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:54Z
Check the source to verify that this is the current version before use.