
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, STRAIGHT, RFI/EMI, CATEGORY 2B (FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the accessories described herein shall consist of this specification sheet and the latest issue of MIL-C-85049.

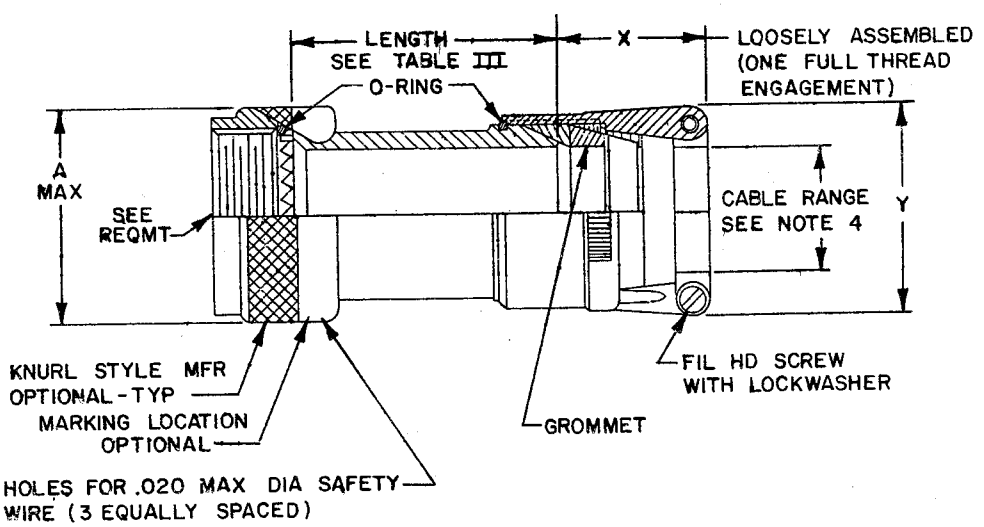

(B) NOTE:
1. See table I for minimum and maximum clamp size available with each shell size. See table II for cable range for each clamp size.

FIGURE 1. Configuration and dimensions.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Connector shell size and clamp size.

Shell size	Min clamp size	Max clamp size	A Max Dia of coupling ring
9	01	02	.75 (19.1)
11	01	03	.85 (21.6)
13	02	04	1.00 (25.4)
15	02	05	1.15 (29.2)
17	02	06	1.25 (31.8)
19	03	07	1.40 (35.6)
21	03	08	1.55 (39.4)
23	03	09	1.65 (41.9)
25	04	10	1.85 (47.0)

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

TABLE II. Clamp size and dimensions.

Clamp size	Cable range		Y Dim Max	X Max
	Min	Max		
01	.062 (1.57)	.125 (3.18)	.80 (20.3)	1.250 (31.75)
02	.125 (3.18)	.250 (6.35)	1.00 (25.4)	1.250 (31.75)
03	.250 (6.35)	.375 (9.53)	1.10 (27.9)	1.250 (31.75)
04	.375 (9.53)	.500 (12.70)	1.20 (30.5)	1.250 (31.75)
05	.500 (12.70)	.625 (15.88)	1.25 (31.8)	1.350 (34.29)
06	.625 (15.88)	.750 (19.05)	1.40 (35.6)	1.375 (34.93)
07	.750 (19.05)	.875 (22.23)	1.50 (38.1)	1.500 (38.10)
08	.875 (22.23)	1.000 (25.40)	1.65 (41.9)	1.625 (41.28)
09	1.000 (25.40)	1.125 (28.58)	1.75 (44.5)	1.625 (41.28)
10	1.125 (28.58)	1.250 (31.75)	1.90 (48.3)	1.625 (41.28)

TABLE III. Length.

Shell size	Code	Length in inches ±.032 (.81)
9 thru 25	Standard	1.50 (38.1)
9 thru 25	A	2.50 (63.5)
15 thru 25	B	3.50 (88.9)
21 thru 25	C	4.50 (114.3)

Ⓑ NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and tables I, II, and III.

Interface dimensions shall conform to MIL-C-38999 series III and IV.

The coupling nut shall be captivated to the adapter body and free to rotate.

Simplified assembly instructions shall be shipped with the unit package.

Material:

Adapter body and coupling nut - Aluminum alloy in accordance with MIL-C-85049.

Clamp screws and lockwashers - Corrosion resisting steel, passivate.
Ⓑ Grommet and O-Rings - Silicone Rubber.

Finish: In accordance with MIL-C-85049.

1/ N - Electroless nickel

W - Cadmium - olive drab.

Part number: See example below:

M85049/	18	9	W	02	A

Military designator

Specification sheet

Shell size, see table I

Finish

Clamp size, see table II

Length code, see table III

Omit for standard

QUALIFICATION: See MIL-C-85049, category 2B.

B QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46218.

1/ Not for Navy use. Limited to space application for Air Force use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3397-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.