
MILITARY SPECIFICATION SHEET

Ⓐ CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, STRAIGHT, SHIELD TERMINATION, CATEGORY 3C (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

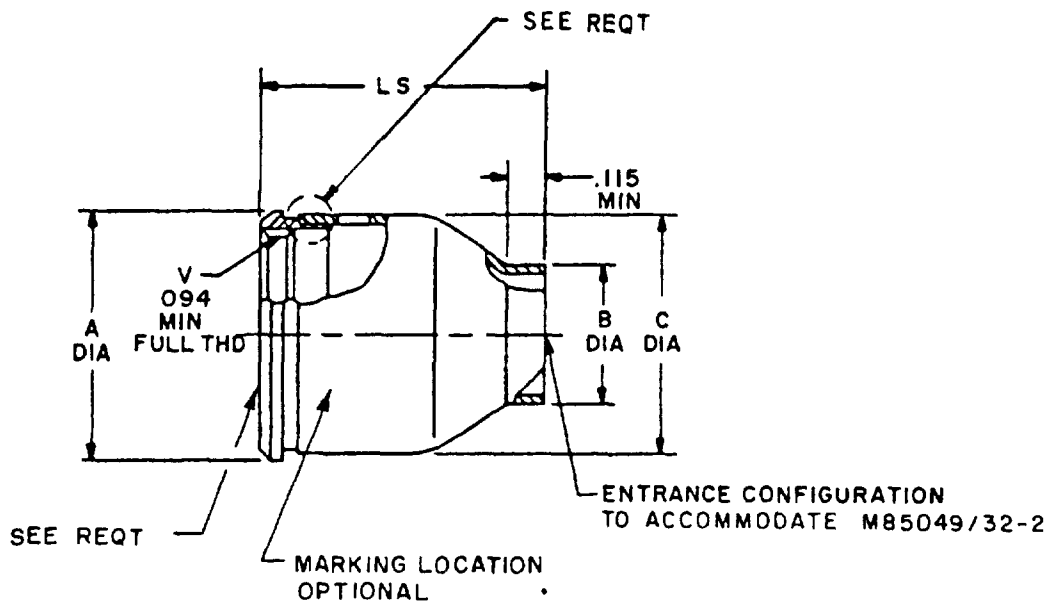

ADAPTER-1

Ⓐ FIGURE 1 Dimensions and configuration (see table I)

Ⓐ denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-25 14:04:22
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm	INCHES	mm
.015	.38	.719	18.26	1.062	26.97
.094	2.39	.734	18.64	1.094	27.79
.115	2.92	.766	19.46	1.141	28.98
.125	3.18	.781	19.84	1.156	29.36
.359	9.12	.796	20.22	1.219	30.96
.406	10.31	.844	21.44	1.265	32.13
.500	12.70	.859	21.82	1.344	34.14
.516	13.11	.891	22.63	1.391	35.33
.578	14.68	.938	23.83	1.469	37.31
.594	15.09	.969	24.61	1.516	38.51
.641	16.28	1.000	25.40	1.594	40.49
.656	16.66	1.016	25.81	1.719	43.66
.688	17.48	1.047	26.59		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply after plating.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

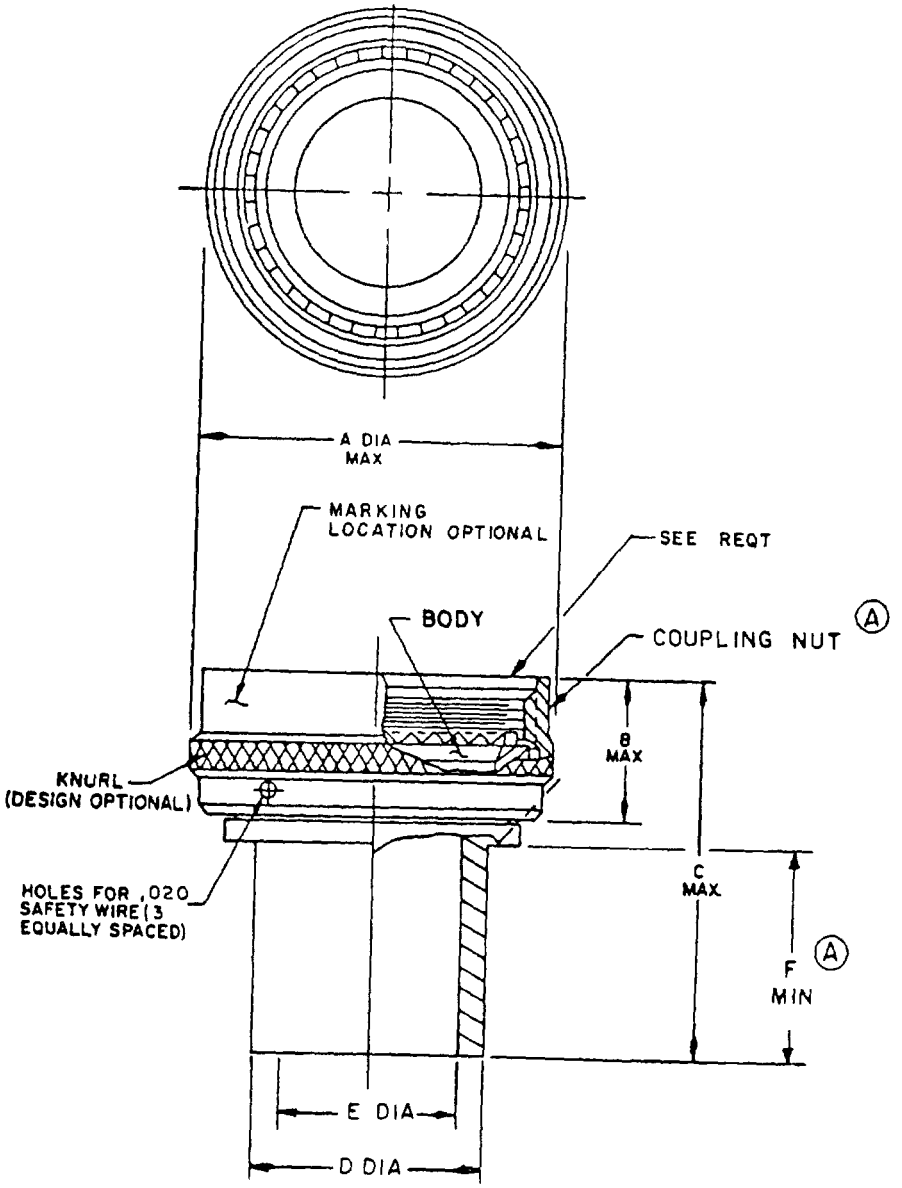

ADAPTER-2

Ⓐ FIGURE 2. Dimensions and configuration (see table II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm	INCHES	mm
.020	0.51	.620	15.75	1.112	28 24
.250	6 35	.670	17 02	1.120	28 45
.285	7 24	.75	19 05	1.14	28 96
.325	8 26	.789	20 04	1.192	30 28
.337	8 56	.85	21 59	1.25	31 75
.420	10 67	.880	22 35	1.40	35 56
.475	12 07	.914	23 22	1.50	38 10
.488	12.40	1.000	25 40	1.65	41 91
.500	12.7	1.039	26 39	1.75	44 45
.54	13.7	1.10	27 94		

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3. Crimp tool is Burndy Y40LH or equivalent
4 Dimensions apply after plating

FIGURE 2. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction.

(A) Dimensions and configuration. See figure 1 and 2, and tables I and II.

Straight adapter (figure 1) may be of two-piece construction Method of joining is optional

(A) Interface dimensions shall conform to MIL-C-38999, series I and II.

(A) The coupling nut shall be captivated to and free to rotate on the body Parts supplied to figure 2 shall consist of a coupling nut and body as shown, along with the appropriate M85049/26-2 shield crimp ring from Table II. For OEM use only, M85049/33-2-XXX can be supplied by qualified sources, without the M85049/26-2-XX shield crimp ring by specifying "without shield crimp ring" on purchase order Parts shall still be marked with M85049/33-2-XXX part number

Material and finish shall be as specified in table III.

(A) TABLE I. Shell size and dimensions.

Adapter shell size	Fits connector shell size		A maximum diameter	B maximum diameter	C maximum diameter	LS maximum	V thread UNEF class 2B
	Series II	Series I					
8	8	9	.594	.359	.516	.844	.4375-28
10	10	11	.719	.406	.641	.969	.5625-24
12	12	13	.844	.500	.766	1.094	.6875-24
14	14	15	.969	.578	.891	1.156	.8125-20
16	16	17	1.094	.641	1.016	1.219	.9375-20
18	18	19	1.219	.688	1.141	1.344	1.0625-18
20	20	21	1.344	.734	1.265	1.469	1.1875-18
22	22	23	1.469	.796	1.391	1.594	1.3125-18
24	24	25	1.594	.859	1.516	1.719	1.4375-18

TABLE II. Shell size and dimensions.

Dash no.	Fits connector shell size		A diameter maximum	B maximum	C maximum	D diameter ±.010	E ±.015	M85049/26-2 ring, shield crimp (ref) see requirements	F minimum
	Series II	Series I							
08	8	9	.75	.54	1.14	.337	.250	-8	.285
10	10	11	.85	.54	1.14	.488	.325	-10	.475
12	12	13	1.00	.54	1.14	.500	.420	-12	
14	14	15	1.10	.54	1.14	.620	.540	-14	
16	16	17	1.25	.54	1.14	.750	.670	-16	
18	18	19	1.40	.54	1.14	.880	.789	-18	
20	20	21	1.50	.54	1.14	1.000	.914	-20	
22	22	23	1.65	.54	1.14	1.120	1.039	-22	
24	24	25	1.75	.54	1.14	1.192	1.112	-24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

TABLE III. Material and finish.

Figure	Material	Finish
1	Copper alloy	Tin-lead solder plated
2	Aluminum alloy in accordance with MIL-C-85049	1/ N, W

1/ N Not for Navy use. Air Force For space applications only.

Part number: See example below:

For figure 1: See example below·

	M85049/	33	-1	-10
Military designator				
Specification sheet				
Figure				
Ⓐ Adapter shell size				

For figure 2: See examples below.

	M85049/	33	-2	-10	W
Military designator					
Specification sheet					
Figure					
Dash number					
Finish (see table III)					

Ⓐ Assembly instructions: Simplified assembly instructions shall be packaged with each accessory for figures 1 and 2.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Qualification:

Ⓐ See MIL-C-85049, category 3C, backshell shall be tested with MIL-C-38999, series I connectors.

Ⓐ QPL evaluating activity Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

Supersession data:

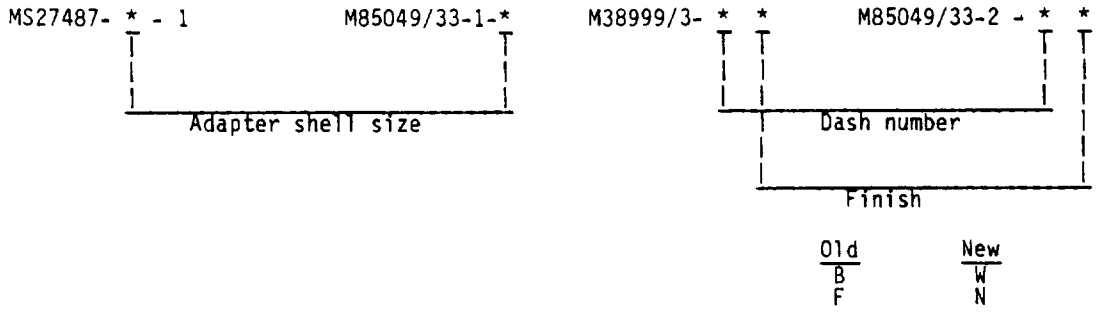

Ⓐ Parts qualified to MIL-C-85049/33 can be supplied for 1 year after the date of this document

Custodians.
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3377-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.