INCH-POUND


MIL-C-85049/42A
30 November 1990
SUPERSEDING
MIL-C-85049/42
16 January 1980
MS3057E
10 May 1982

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, NONENVIRONMENTAL,
STRAIN RELIEF, STRAIGHT, CATEGORY 4A
(FOR MIL-C-5015 SOLDER TYPE, V THREAD OF MS310X
CLASSES A, B, C OR K CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

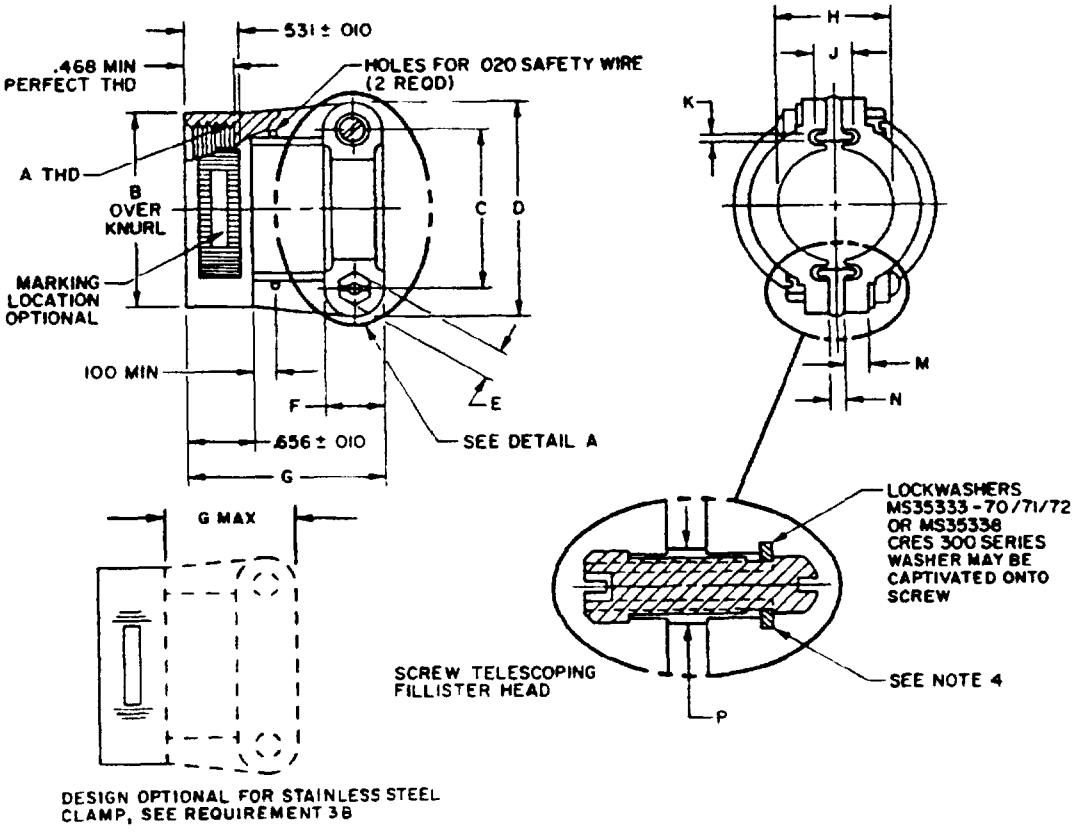

DETAIL A

FIGURE 1. Configuration and dimensions.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	A Thread Class 2A	B Dia Max	C ±.010	D ±.020	E +.000 -.007	F ±.010	G ±.020	H (see note 6) Wire Bundle Accommodation Range	
								Min	Max
-4D	.625-24UNEF	.937	.637	.937	.250	.312	1.281	.125	.312
-6D	.750-20UNEF	1.031	.763	1.125	.250	.375	1.281	.250	.437
-8D	.875-20UNEF	1.250	.942 ±.032	1.312	.250	.422 ±.026	1.281	.312	.562
-10D	1.000-20UNEF	1.250	.964	1.312	.250	.437	1.281	.350	.625
-12D	1.1875-18UNEF	1.437	1.130	1.531	.250	.437	1.312	.500	.750
-16D	1.4375-18UNEF	1.688	1.375	1.750	.250	.531	1.406	.625	.937
-20D	1.750-18UNS	2.000	1.703	2.093	.312	.531	1.593	.875	1.250
-24D	2.000-18UNS	2.250	1.906	2.343	.312	.531	1.625	1.000	1.375
-28D	2.250-16UN	2.500	2.218	2.750	.312	.812	1.900	1.250	1.625
-32D	2.500-16UN	2.750	2.500	3.000	.312	.812	1.900	1.437	1.875

Dash No.	J Dia ±.010	K ±.010	M ±.010	N ±.010	P ±.005	Screw Telescoping, Fil. Hd.
-4D	.218	.062	.156	.109	.166	#4-40 UNC-2*
-6D	.281	.062	.175	.125	.166	
-8D	.312	.062	.211 ±.018	.125	.166	
-10D	.312	.062	.218	.125	.166	
-12D	.375	.062	.250	.156	.192	#6-32 UNC-2*
-16D	.375	.062	.250	.188	.192	
-20D	.475	.078	.312	.188	.217	#8-32 UNC-2*
-24D	.500	.093	.312	.250	.217	
-28D	.625	.093	.312	.375	.217	
-32D	.675	.125	.312	.375	.217	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm
0.005	0.13	0.350	8.89	1.250	31.75
0.007	0.18	0.375	9.53	1.281	32.54
0.010	0.25	0.422	10.72	1.312	33.32
0.016	0.41	0.437	11.10	1.375	34.93
0.018	0.46	0.468	11.89	1.406	35.71
0.020	0.51	0.475	12.07	1.437	36.50
0.026	0.66	0.500	12.70	1.4375	36.51
0.032	0.81	0.531	13.49	1.531	38.89
0.062	1.57	0.562	14.27	1.593	40.46
0.078	1.98	0.625	15.88	1.625	41.28
0.093	2.36	0.637	16.18	1.688	42.88
0.100	2.54	0.656	16.66	1.703	43.26
0.109	2.77	0.675	17.15	1.750	44.45
0.125	3.18	0.750	19.05	1.875	47.63
0.156	3.96	0.763	19.38	1.900	48.26
0.166	4.22	0.812	20.62	1.906	48.41
0.175	4.44	0.875	22.22	2.000	50.80
0.188	4.78	0.937	23.80	2.093	53.16
0.192	4.88	0.942	23.93	2.218	56.34
0.211	5.36	0.964	24.49	2.250	57.15
0.217	5.51	1.000	25.40	2.343	59.51
0.218	5.54	1.031	26.19	2.500	63.50
0.250	6.35	1.125	28.58	2.750	69.85
0.281	7.14	1.130	28.70	3.000	76.20
0.312	7.92	1.1875	30.16		

REQUIREMENTS:

1. Design and construction:

   Dimensions and configuration: See figure 1 and table I.

2. Material and finish:

   a. Accessory components shall be as shown in table II.

   b. Clamp assembly screws shall be corrosion resistant steel in accordance with MIL-C-85049.

3. Qualification:


   a. See MIL-C-85049, category 4A.

   b. For the stainless steel clamp the dimensions F, G, J, K, M, N, P and .656 ±.010 shall be optional, but shall not exceed the dimensions listed in Table I.


   c. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

4. Part Number: See example below:

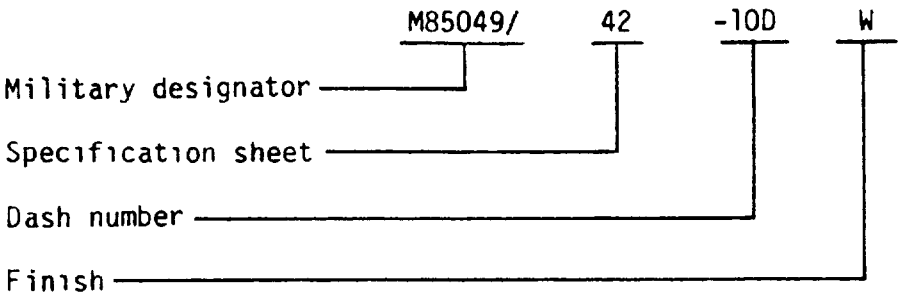

5. Supersession data:

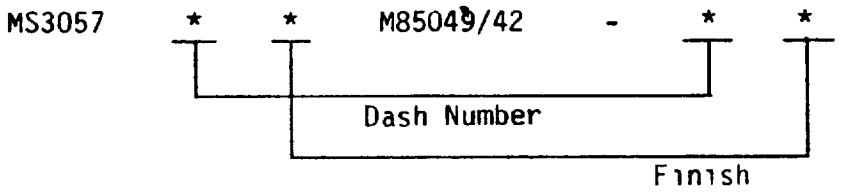

Old	New
DA	W
DC	W
DD	B
DN	N
DS	S

TABLE II. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	1/ N, 2/ W
Body	Corrosion resistant steel in accordance with MIL-C-85049	B, S

1/ Not for Navy use. Restricted to Air Force Space applications only.
2/ W finish is not for use in space application.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents shall be based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.
3. Unless otherwise specified, tolerances shall be: .XX = ±.01; .XXX = ±.005; angular: X° = ±1°00'; X°XX' = ±0°30'.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

4. When the clamp is in the fully closed position the telescoping screw and nut shall not be fully mated.

5. The MIL-C-85049/42 clamp is used to provide strain relief for the connector accessories MIL-C-85049/6, /7, /8, /9, /10, /11, /23, /24 and /25.

6. "Wire bundle accommodation range" dimension is defined as the envelope area for the wire bundle. This dimension is not meant to define the clamp hardware limits.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.