MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4c (FOR MIL-C-24308 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

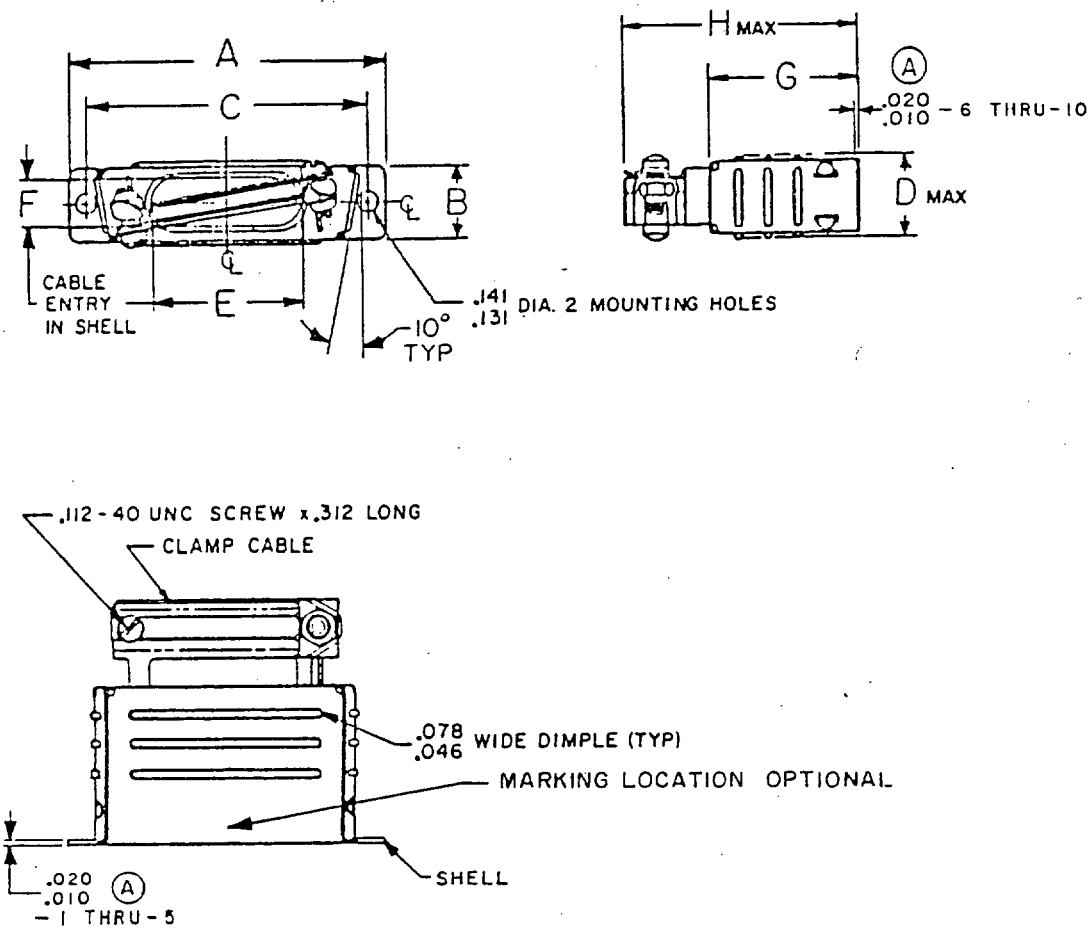


FIGURE 1. Configurations and dimensions

Ⓐ denotes changes

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.


Part number		Shell size	A	B	C	D	E	F	G	H
Steel	Nonmagnetic (brass) (A)									
M85049/48-1-1	M85049/48-1-6	1	1.218 1.188	.514 .469	.989 .979	.578 MAX	.390 .360	.390 .360	.765 .735	1.250 1.187
M85049/48-1-2	M85049/48-1-7	2	1.546 1.516	.514 .469	1.317 1.307	.578 MAX	.728 .698	.327 .297	.765 .735	1.250 1.187
M85049/48-1-3	M85049/48-1-8	3	2.093 2.063	.514 .469	1.857 1.847	.578 MAX	1.015 .985	.327 .297	1.015 .985	1.563 1.500
M85049/48-1-4	M85049/48-1-9	4	2.733 2.703	.514 .469	2.505 2.495	.578 MAX	1.390 1.360	.327 .297	1.015 .985	1.563 1.500
M85049/48-1-5	M85049/48-1-10	5	2.640 2.610	.623 .578	2.411 2.401	.687 MAX	1.421 1.391	.421 .391	1.140 1.110	1.688 1.625

Inches	mm	Inches	mm
1.187	30.15	1.625	41.28
1.188	30.18	1.688	42.88
1.218	30.94	2.063	52.40
1.250	31.75	2.093	53.16
1.500	38.10	2.610	66.29
1.516	38.51	2.640	67.06
1.546	39.27	2.703	68.66
1.563	39.70	2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

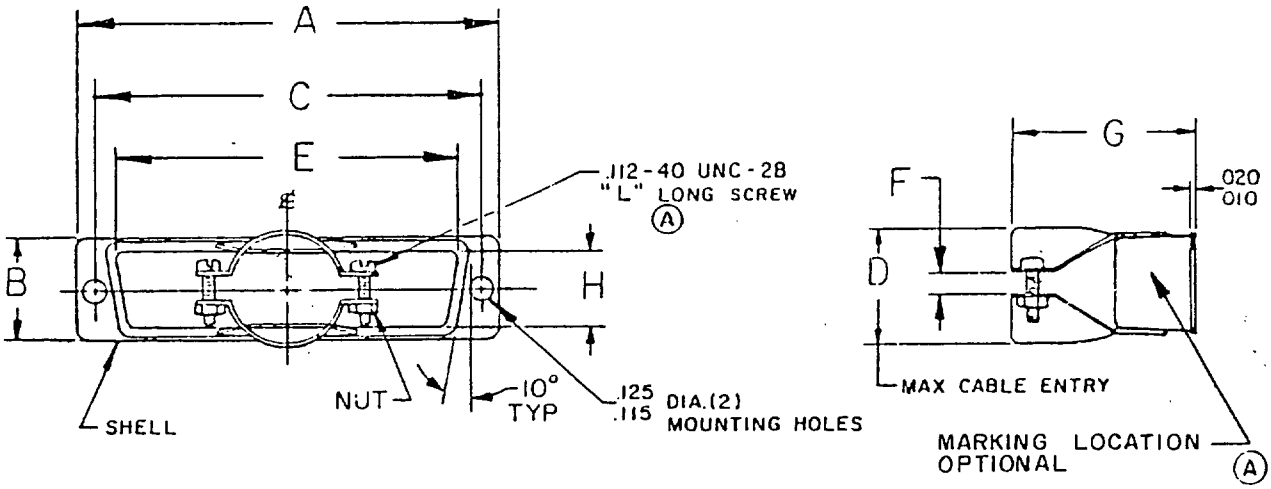


Part number		Shell size	A	B	C	D	E	F	G	H	L ± .031
Steel	Nonmagnetic (brass) (A)										
M85049/48-2-1	M85049/48-2-6	1	1.223 1.193	.515 .485	.989 .979	.406	.676 .646	.140 .110	1.061 1.001	.359 .329	.375
M85049/48-2-2	M85049/48-2-7	2	1.546 1.516	.515 .485	1.317 1.307	.406	.999 .969	.140 .110	1.061 1.001	.359 .329	.375
M85049/48-2-3	M85049/48-2-8	3	2.093 2.063	.515 .485	1.857 1.847	.593	1.530 1.500	.202 .172	1.092 1.032	.359 .329	.375
M85049/48-2-4	M85049/48-2-9	4	2.733 2.703	.515 .485	2.505 2.495	.718	2.186 2.156	.265 .235	1.092 1.032	.359 .329	.500
M85049/48-2-5	M85049/48-2-10	5	2.640 2.610	.624 .594	2.411 2.401	.812	2.108 2.078	.327 .297	1.092 1.032	.453 .423	.625

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.010	0.25	.406	10.31	.989	25.12	2.063	52.40
.020	0.51	.423	10.74	.999	25.37	2.078	52.78
.110	2.79	.453	11.51	1.001	25.43	2.093	53.16
.112	2.84	.485	12.32	1.032	26.21	2.108	53.54
.115	2.92	.500	12.70	1.061	26.95	2.156	54.76
.125	3.18	.515	13.08	1.092	27.74	2.186	55.52
.140	3.56	.593	15.06	1.193	30.30	2.401	60.99
.172	4.37	.594	15.09	1.223	31.06	2.411	61.24
.202	5.13	.624	15.85	1.307	33.20	2.495	63.37
.235	5.97	.625	15.88	1.317	33.45	2.505	63.63
.265	6.73	.646	16.41	1.500	38.10	2.610	66.29
.297	7.54	.676	17.17	1.516	38.51	2.640	67.06
.327	8.31	.718	18.24	1.530	38.86	2.703	68.66
.329	8.36	.812	20.62	1.546	39.27	2.733	69.42
.359	9.12	.969	24.61	1.847	46.91		
.375	9.53	.979	24.87	1.857	47.17		

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.

FIGURE 2. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

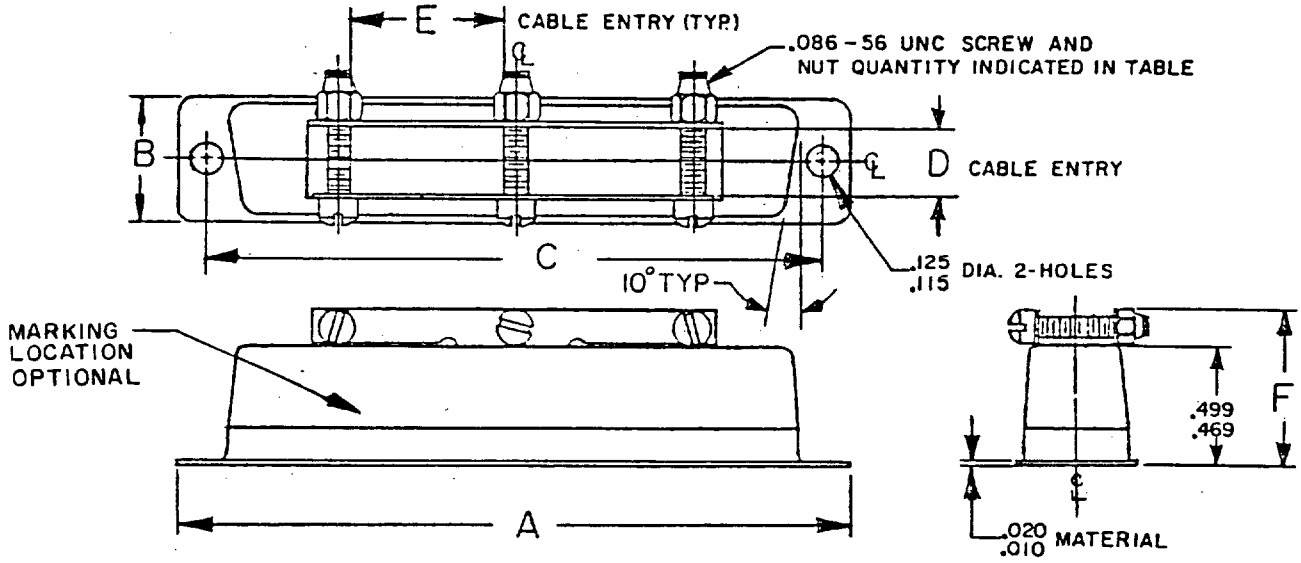

Part number		Shell size	No. of screws	A	B	C	D	E	F
Steel	Nonmagnetic (brass) (A)								
M85049/48-3-2	M85049/48-3-7	2	2	1.546 1.516	.515 .485	1.317 1.307	.311 .281	.327 .297	.679 .609
M85049/48-3-3	M85049/48-3-8	3	2	2.093 2.063	.515 .485	1.857 1.847	.311 .281	.811 .781	.679 .609
M85049/48-3-4	M85049/48-3-9	4	3	2.733 2.703	.515 .485	2.505 2.495	.311 .281	.702 .672	.679 .609
M85049/48-3-5	M85049/48-3-10	5	3	2.640 2.610	.624 .594	2.411 2.401	.405 .375	.702 .672	.703 .685

Inches	mm
.485	12.32
.515	13.08
.594	15.09
.624	15.85
1.516	38.51
1.546	39.27
2.063	52.40
2.093	53.16
2.610	66.29
2.640	67.06
2.703	68.66
2.733	69.42

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.
(A) 4. Electroless nickel finish is not for Navy use.
(A) 5. Electroless nickel shall be used in aerospace application only.

FIGURE 3. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figures 1, 2, and 3.
Screws and nuts are shown assembled for reference only and are to be shipped unassembled in a common container with the accessory.
Material and finish: See table I.

Ⓐ TABLE I. Material and finish.

Part name	Material 1/	Finish
Screw Nut 2/	300 series stainless steel	S
Screw Nut 3/	Brass	F, Z
Clamp cable	Low carbon sheet steel SAE 1010 .024 thick. Brass sheet in accordance with QQ-B-613 alloy 260 1/2 H.	F, Z, and N
Shell	Low carbon sheet steel SAE 1010 Soft rolled brass in accordance with QQ-B-613, composition 2, anneal temper	
Rivnut or equivalent	Aluminum alloy in accordance with MIL-C-85049	A

1/ For material see figure 1.
2/ For dash numbers -3, -4, and -5 - MS21083N04.
3/ For dash numbers -8, -9, and -10 - MS21083B04.

Finish designator:

Ⓐ Finish F - Yellow chromate over cadmium in accordance with QQ-P-416, type II, class 2.

Ⓐ Finish Z - Zinc plated in accordance with ASTM B633, type II.

Ⓐ Finish N - Electroless nickel in accordance with MIL-C-26074, class 1 or 2, grade B (see notes 4 and 5 on page 4).

Ⓐ Finish A - Black anodize in accordance with MIL-A-8625, type II.

Ⓐ Finish S - Passivate in accordance with QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Part number: See example below:

For figure 1:

M85049/ 48 - 1 - 10 - F

- Military designator
- Specification sheet
- Figure
- Dash number (see figure 1)
- Ⓐ Finish

For figure 2:

M85049/ 48 - 2 - 10 - F

- Military designator
- Specification sheet
- Figure
- Dash number (see figure 2)
- Ⓐ Finish

For figure 3:

M85049/ 48 - 3 - 10 - F

- Military designator
- Specification sheet
- Figure
- Dash number (see figure 3)
- Ⓐ Finish

Qualification:

See MIL-C-85049, category 4c.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Supersession data:

Ⓐ M24308/20 * → M85049/48-1 * * (Finish designator; Dash number; Figure number)

Ⓐ M24308/21 * → M85049/48-2 * * (Finish designator; Dash number; Figure number)

Ⓐ M24308/22 * → M85049/48-3 * * (Finish designator; Dash number; Figure number)

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Ⓐ Air Force - 11, 99
DLA - ES

ⒶCivil Agencies Coordinating Activities:
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3668-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.