INCH-POUND

MIL-C-85049/53A
30 November 1990
SUPERSEDING
MIL-C-85049/53
16 January 1980
MS3152E
10 May 1982

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, NONENVIRONMENTAL, STRAIGHT, CATEGORY 4C (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

**INACTIVE FOR NEW DESIGN AFTER 30 NOVEMBER 1990.
FOR NEW DESIGN USE MIL-C-85049/52.**

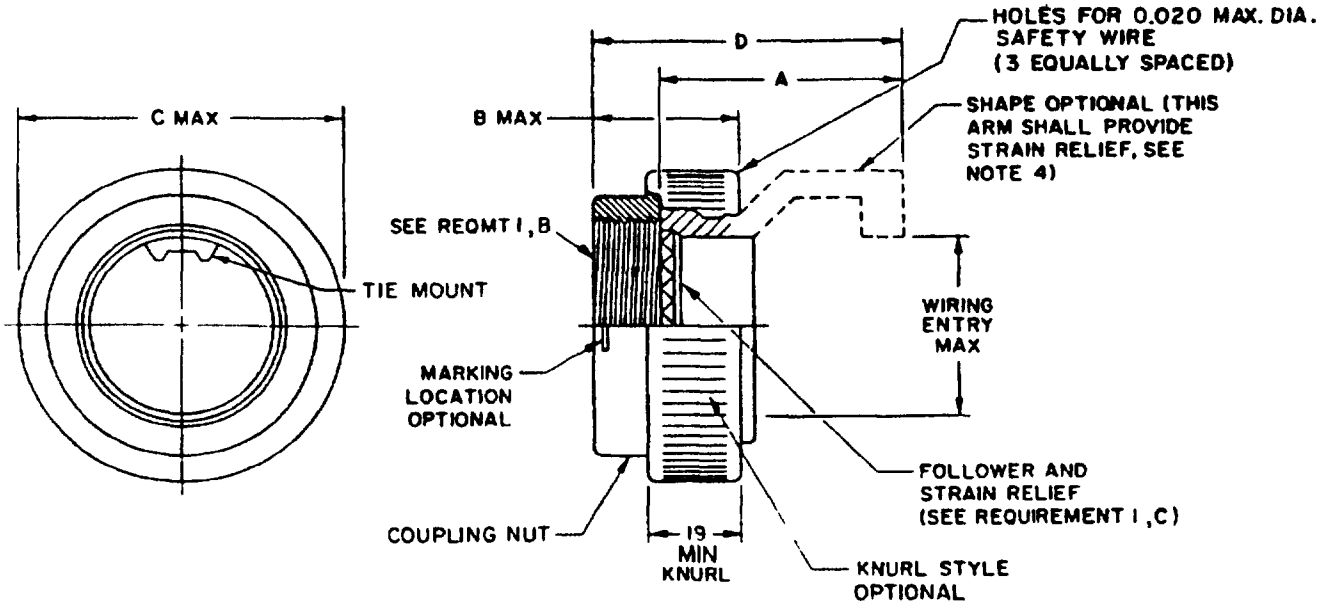


FIGURE 1. Configuration and dimensions.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash No.	For Connector Shell, Size (Ref)				A Max	B Max	C Dia Max	D Max	Wiring Entry Max
	MIL-C-81703 Series 3	MIL-C-26482 Series 2	MIL-C-5015 Crimp	MIL-C-83723 Series III					
03	3				.954	.540	.669	1.310	.260
08		8	8S	8	.954	.540	.617	1.310	.260
10		10	10,10SL	10	.954	.540	.734	1.310	.365
12	7	12	12,12S	12	.954	.540	.858	1.560	.501
14	12	14	14,14S	14	1.204	.540	.984	1.560	.575
16	19	16	16,16S	16	1.204	.540	1.112	1.560	.700
18	27	18	18	18	1.204	.540	1.218	1.560	.779
20	37	20	20	20	1.310	.540	1.345	1.666	.904
22		22	22	22	1.430	.540	1.468	1.786	1.029
24		24	24	24	1.560	.540	1.593	1.916	1.144
28			28		1.560	.702	1.969	2.098	1.379

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.015	0.38	0.167	15.67	0.984	24.99	1.392	35.36
0.020	0.51	0.669	16.99	1.029	26.14	1.430	36.32
0.030	0.76	0.700	17.78	1.112	28.24	1.468	37.29
0.031	0.79	0.702	17.83	1.144	29.06	1.560	39.62
0.190	4.83	0.734	18.64	1.204	30.58	1.593	40.46
0.260	6.60	0.779	19.79	1.218	30.94	1.666	42.31
0.365	9.27	0.858	21.79	1.310	33.27	1.916	48.67
0.501	12.73	0.904	22.96	1.345	34.16	1.969	50.01
0.540	13.72	0.954	24.23	1.379	35.03	2.098	53.29
0.575	14.60						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

RE REMENTS

1. Design and construction:

   a. Dimensions and configuration See figure 1 and table I.

   b. Interface dimensions shall be in accordance with MIL-C-85049, figure 4.

   c. Complete strain relief unit consists of coupling nut and a follower with strain relief arm. The coupling shall be captivated to the follower and free to rotate.

2. Material and finish: see table II.


TABLE II. Material and finish.

Figure	Material	Finish
Coupling nut and follower	Aluminum alloy in accordance with MIL-C-85049	A, 1/ W
Tie mount	Polyamid (optional)	None
Fastener	Stainless steel (optional)	None

1/ W finish is not for use in space application.

3. Qualification: See MIL-C-85049, category 4C. Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

4. Part Number: See example below:

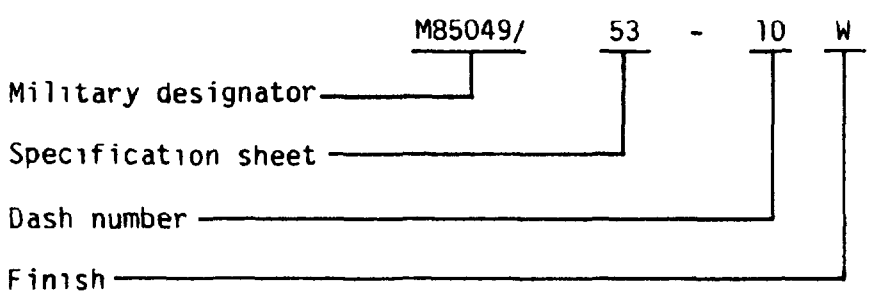

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

5. Supersession data

MS3152 * M85049/53 - * *

Dash Number

Finish

Old	New
Electroless Nickel	W

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.

3. Unless otherwise specified, tolerances shall be: XX = ±.03 and XXX = ±.015 angular. Tolerances X = ±2.

4. Strain relief unit is used with MS3367-1-X plastic strap qualified in accordance with MIL-S-23190, MIL-T-713 lacing twine, or MIL-T-43435 lacing tape, or equivalent, not supplied with the connector accessory.

5. This clamp will not accommodate connectors using size 8, 4 and 0 contacts.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS
(Project No. 5935-3729-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.