INCH-POUND

MIL-C-85049/55B
30 November 1990
SUPERSEDING
MIL-C-0085049/55A(USAF)
26 January 1987
MIL-C-85049/55
16 January 1980
MS3154C
10 May 1982


MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, NONENVIRONMENTAL, 90°, SELF-LOCKING AND NON-SELF-LOCKING, CATEGORY 4C (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049.

**INACTIVE FOR NEW DESIGN AFTER 30 NOVEMBER 1990.
FOR NEW DESIGN USE MIL-C-85049/51.**

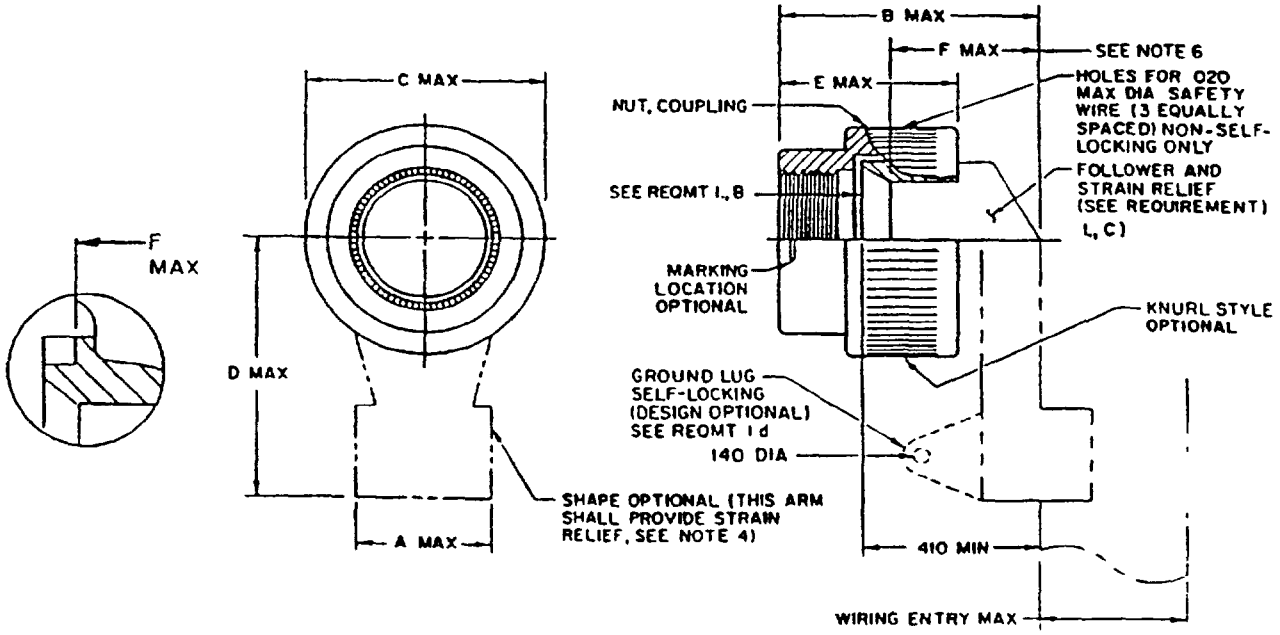

NON-SELF-LOCKING OR SELF-LOCKING

FIGURE 1. Configuration and dimensions.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, shell size and dimensions.

Dash No	For Connector Shell, Size (Ref)				Non-Self-Locking				Self-Locking			
	MIL-C-81703 Series 3	MIL-C-26482 Series 2	MIL-C-5015 Crimp	MIL-C-83723 Series III	B Max	C Max Dia	E Max	F Max	B Max	C Max Dia	E Max	F Max
03	3				.751	782	.540	.431	1.05	1 010	.710	.73
08		8	8S	8	.751	.657	.540	431	1.05	885	710	73
10		10	10S,10SL	10	.751	.782	.540	431	1.05	1 010	710	.73
12	7	12	12,12S	12	.751	.937	.540	.431	1.05	1.135	.710	.73
14	12	14	14,14S	14	.751	1.050	.540	.431	1.05	1 260	.710	73
16	19	16	16,16S	16	.751	1.239	.540	.431	1.05	1 385	.710	.73
18	27	18	18	18	776	1 378	.540	.456	1 05	1 510	710	.73
20	37	20	20	20	.776	1.500	.540	.456	1.07	1.635	.710	.75
22		22	22	22	.776	1.631	.540	.456	1.07	1.760	.710	.75
24		24	24	24	.776	1.750	.540	.456	1.07	1.885	.710	.75
28			28		.938	1.970	.702	.448	1.24	2.135	.890	.75

TABLE I. Dimensions (continued).

Non-Self-Locking and Self-Locking			
Dash No.	A Max	B Max	Wiring Entry Max
03	.500	1.29	.260
08	.463	1.22	.260
10	.551	1.29	.365
12	.644	1.62	.501
14	.738	1.66	.575
16	.834	1.72	.700
18	.914	1.72	.779
20	1.00	1.79	.904
22	1.10	1.85	1.029
24	1.20	1.91	1.144
28	1.48	2.06	1.379

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

INCH	mm	INCH	mm	INCH	mm	INCH	mm
0.015	0.380	0.702	17.830	1.010	25.650	1.480	37.590
0.030	0.760	0.710	18.030	1.029	26.130	1.500	38.100
0.140	3.550	0.730	18.540	1.050	26.670	1.510	38.350
0.260	6.600	0.738	18.740	1.070	27.170	1.620	41.140
0.365	9.270	0.750	19.050	1.100	27.940	1.631	41.420
0.431	10.940	0.751	19.070	1.135	28.820	1.635	41.520
0.448	11.370	0.776	19.710	1.144	29.050	1.660	42.160
0.456	11.580	0.779	19.780	1.200	30.480	1.720	43.680
0.463	11.760	0.782	19.860	1.220	30.980	1.750	44.450
0.500	12.700	0.834	21.180	1.239	31.470	1.760	44.700
0.501	12.720	0.885	22.470	1.240	31.490	1.796	45.610
0.540	13.710	0.890	22.600	1.260	32.000	1.858	46.990
0.551	13.990	0.904	22.960	1.290	32.760	1.885	47.870
0.575	14.600	0.914	23.210	1.378	35.000	1.910	48.510
0.644	16.350	0.937	23.790	1.379	35.020	2.060	52.320
0.657	16.680	0.938	23.820	1.385	35.170	2.135	54.220
0.700	17.780	1.000	25.400				

REQUIREMENTS:

1. Design and construction:

   a. Dimensions and configuration: See figure 1 and table I.

   b. Interface dimensions shall be in accordance with MIL-C-85049, figure 4.

   c. Complete strain relief unit consists of coupling nut and a follower with strain relief arm. The coupling shall be captivated to the follower and free to rotate.

   d. Grounding lug is not for Navy use, not for new design for Air Force.

2. Material and finish: See table II.

TABLE II. Material and finish.

	Material	Finish
Coupling nut and follower	Aluminum alloy in accordance with MIL-C-85049	1/ W A
Tie mount	Polyamid (optional)	None
Fastener	Stainless steel (optional)	None

1/ W finish is not for use in space application.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

4. Qualification:


Non-self-locking and self-locking: See MIL-C-85049, category 4C.

Information pertaining to qualification of products may be obtained from the Commanding Officer, Naval Avionics Center, Attention: Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

5. Part Number: See example below:

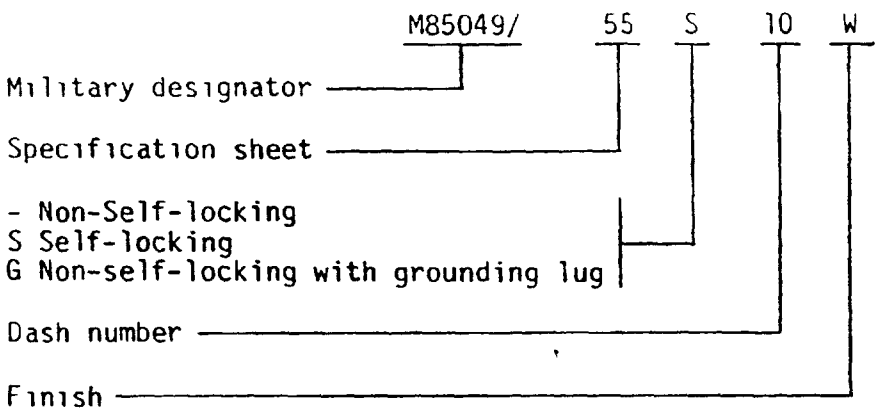

6. Supersession data:

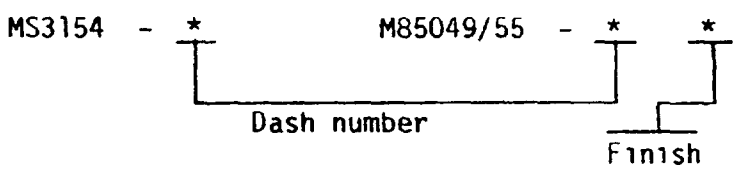

Old	New
Electroless Nickel	W

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are based upon 1.00 inch = 25.4 mm and shall be in accordance with ASTM E380, paragraph 4.5, Method A and ASTM E29, rounding-off method.

3. Tolerances shall be: XX = ±.03 and .XXX = ±.015 angular tolerances X = ±2.

4. Strain relief unit is used with MS3367-1-X plastic strap qualified in accordance with MIL-S-23190, MIL-T-713 lacing twine, or MIL-T-43435 ~~lacing tape, or equivalent, not supplied with the connector accessory.~~

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

5. This clamp will not accommodate connectors using size 8, 4 and 0 contacts.

6. Measured from the root of the tooth to the back of the coupling nut.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity:
Navy - AS
Project No. 5935-3734-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.