MILITARY SPECIFICATION SHEET

Ⓐ CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, SPLIT 90°, CATEGORY 4C
(FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

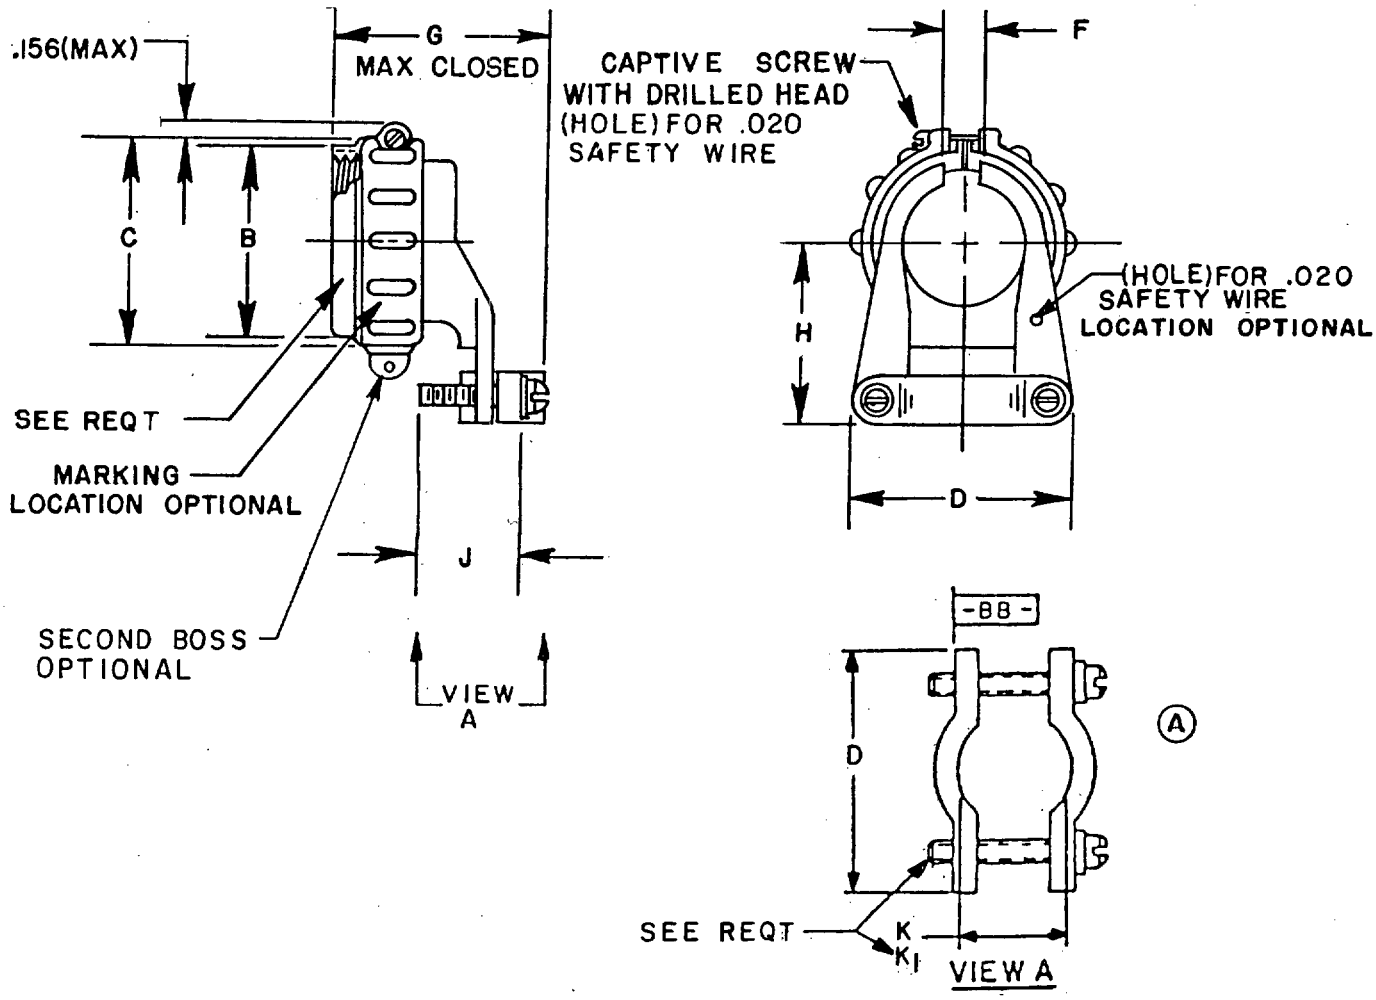



FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Ⓐ TABLE I. Shell and clamp sizes, and coupling ring dimensions.

| Accessory shell size | Fits connector shell size | | B +.000 -.062 diameter | C maximum diameter | D maximum dimension | F minimum slot | G maximum dimension | H maximum dimension | J ±.032 screw length | Screw size | K maximum closed | $K_1$ minimum full open |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Series II | Series I | | | | | | | | | | |
| 8 | 8 | 9 | .562 | .688 | .85 | .125 | 1.20 | 1.00 | .500 | 6-32 | .082 | .234 |
| 10 | 10 | 11 | .688 | .812 | .90 | .125 | 1.20 | 1.10 | .500 | 6-32 | .082 | .234 |
| 12 | 12 | 13 | .812 | .938 | 1.10 | .188 | 1.40 | 1.10 | .625 | 6-32 | .114 | .328 |
| 14 | 14 | 15 | .938 | 1.062 | 1.15 | .188 | 1.45 | 1.25 | .750 | 6-32 | .176 | .457 |
| 16 | 16 | 17 | 1.062 | 1.188 | 1.30 | .188 | 1.60 | 1.30 | .750 | 6-32 | .238 | .634 |
| 18 | 18 | 19 | 1.188 | 1.312 | 1.50 | .250 | 1.70 | 1.35 | .750 | 6-32 | .208 | .614 |
| 20 | 20 | 21 | 1.312 | 1.438 | 1.60 | .250 | 1.85 | 1.60 | .875 | 8-32 | .302 | .698 |
| 22 | 22 | 23 | 1.438 | 1.562 | 1.70 | .312 | 1.95 | 1.75 | 1.000 | 8-32 | .302 | .823 |
| 24 | 24 | 25 | 1.562 | 1.688 | 1.80 | .312 | 2.10 | 1.85 | 1.125 | 8-32 | .332 | .853 |

| INCHES | mm | INCHES | mm | INCHES | mm | INCHES | mm |
|---|---|---|---|---|---|---|---|
| .032 | 0.81 | .312 | 7.92 | .823 | 20.90 | 1.312 | 33.32 |
| .062 | 1.57 | .328 | 8.33 | .853 | 21.67 | 1.35 | 34.29 |
| .082 | 2.08 | .457 | 11.61 | .875 | 22.22 | 1.40 | 35.56 |
| .114 | 2.90 | .500 | 12.7 | .938 | 23.82 | 1.438 | 36.53 |
| .125 | 3.18 | .562 | 14.27 | 1.000 | 25.40 | 1.45 | 36.83 |
| .176 | 4.47 | .614 | 15.60 | 1.062 | 26.97 | 1.50 | 38.10 |
| .188 | 4.78 | .625 | 15.88 | 1.10 | 27.94 | 1.562 | 39.67 |
| .208 | 5.28 | .634 | 16.10 | 1.125 | 28.58 | 1.60 | 40.64 |
| .234 | 5.94 | .688 | 17.48 | 1.15 | 29.21 | 1.688 | 42.88 |
| .238 | 6.05 | .698 | 17.73 | 1.188 | 30.18 | 1.70 | 43.18 |
| .250 | 6.35 | .750 | 19.05 | 1.25 | 31.75 | 1.75 | 44.45 |
| .302 | 7.67 | .812 | 20.62 | 1.30 | 33.02 | 1.80 | 45.72 |
| | | | | | | 1.85 | 46.99 |
| | | | | | | 1.95 | 49.53 |
| | | | | | | 2.10 | 53.34 |

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only.
4. This accessory will not accommodate connectors using 8, 4, and 0 contacts.

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Ⓐ Dimensions and configuration: See figure 1 and table I.

Interface dimensions shall conform to MIL-C-38999, series I and II.

In the assembled mode, the coupling nut shall be captivated to the adapter body and free to rotate.

Ⓐ Figure 1 dimensions G and $K_1$ are applicable when the end of the screw is flush with -BB-.

Material:

Coupling nut, ring, clamp, saddle bars: Aluminum alloy in accordance with MIL-C-85049.

Ⓐ Fasteners: 300 series corrosion resistant steel, passivated.

Ⓐ Finish: In accordance with MIL-C-85049.

Aluminum components: 1/ N, W.

Ⓐ Part number: See example below:

| M85049/ | 65 | - | 10 | W |
|---|---|---|---|---|

Military designator

Specification sheet

Accessory shell size (see table I)

Finish

Qualification:

Ⓐ See MIL-C-85049, category 4C. Accessory shall be tested with MIL-C-38999 series I connector.

Ⓐ QPL evaluating activity: Naval Avionics Center, Code B/714, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

1/ N Not for Navy use. Air Force: For space applications only.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3377-19)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.