MIL-C-85049/65B
19 December 1989
SUPERSEDING
MIL-C-85049/65A
21 November 1986

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIFF, SPLIT 90°, CATEGORY 4C (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

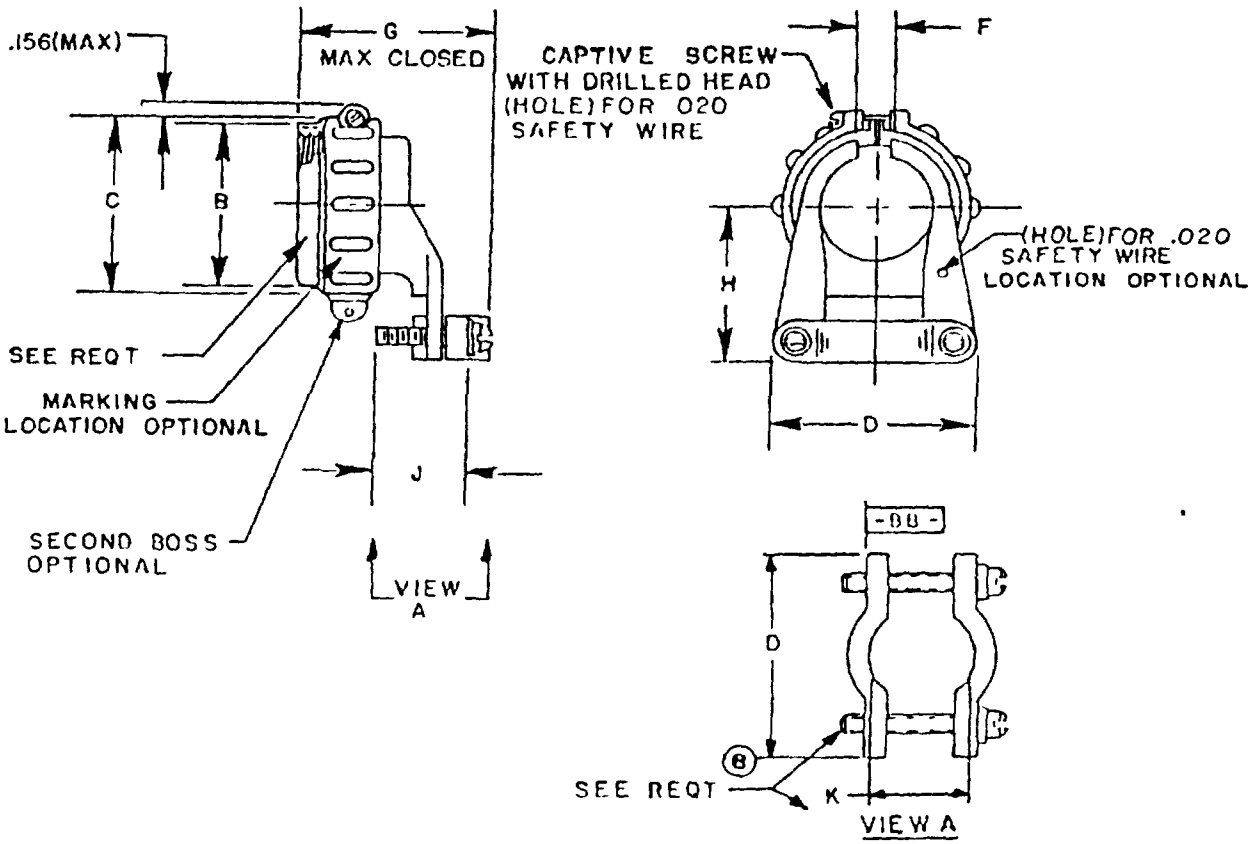


FIGURE 1 Dimensions and configuration.

(B) denotes changes

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

TABLE I Shell and clamp sizes, and coupling ring dimensions (B) (3)

Accessory shell size	Fits connector shell size		B ±.000 -.062 dia	C max dia	D max dim	F min slot	G max dim	H max dim	J ±.032 screw length	Screw size	K wire bundle accommodation	
	Series II	Series I									Min	Max
8	8	9	.562 (14.3)	.688 (17.5)	.85 (21.6)	.125 (3.18)	1.20 (30.4)	1.00 (25.4)	.625 (15.9)	6-32	0.8 (2.49)	.234 (5.94)
10	10	11	.668 (17.5)	.812 (20.6)	.90 (22.9)	.125 (3.18)	1.20 (30.4)	1.10 (27.9)	.625 (15.9)	6-32	.153 (3.87)	.234 (5.94)
12	12	13	.812 (20.6)	.938 (23.8)	1.10 (27.9)	.188 (4.78)	1.40 (35.6)	1.10 (27.9)	.625 (15.9)	6-32	.190 (4.83)	.328 (8.33)
14	14	15	.938 (23.8)	1.062 (27.0)	1.15 (29.2)	.188 (4.78)	1.45 (36.8)	1.25 (31.8)	.750 (19.1)	6-32	.260 (6.60)	.457 (11.61)
16	16	17	1.062 (27.0)	1.188 (30.2)	1.30 (33.0)	.188 (4.78)	1.60 (40.6)	1.30 (33.0)	.750 (19.1)	6-32	.283 (7.19)	.634 (15.60)
18	18	19	1.188 (30.2)	1.312 (33.3)	1.50 (38.1)	.250 (6.35)	1.70 (43.1)	1.35 (34.2)	.750 (1.91)	8-32	.325 (8.26)	.614 (16.10)
20	20	21	1.312 (33.3)	1.438 (36.5)	1.60 (40.6)	.250 (6.35)	1.85 (47.0)	1.60 (40.6)	.875 (22.2)	8-32	.343 (8.71)	.698 (17.73)
22	22	23	1.438 (36.5)	1.562 (39.7)	1.70 (43.2)	.312 (7.92)	1.95 (49.5)	1.75 (44.4)	1.000 (25.4)	8-32	.381 (9.68)	.823 (20.90)
24	24	25	1.562 (39.7)	1.668 (42.9)	1.80 (45.7)	.312 (7.92)	2.10 (53.3)	1.85 (4.70)	1.125 (28.6)	8-32	.481 (10.62)	.853 (21.66)

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
032	0 81	343	8 71	85	21 6	1 312	33 32
.062	1.57	.381	9.67	.853	21 67	1.35	33.3
.125	3 18	.457	11.61	.875	22.22	1.40	35.6
.150	3.81	.481	12 21	.90	22.9	1.438	36.53
.187	4.75	.562	14.27	938	23.83	1.50	38.1
.188	4.78	.614	15.59	1.000	25 40	1.562	39.67
.234	5 94	.625	15.88	1.062	26.97	1.60	40.6
.250	6.35	634	16.10	1.040	27.94	1.688	42.88
.260	6.60	.688	17.48	1 125	28 58	1 70	43 6
.283	7.18	.698	17.73	1.15	29.2	1.75	44.6
.312	7.92	.750	19 05	1.188	30 18	1.80	45.7
.325	8.25	.812	20.62	1.20	30.48	1.85	47.0
.328	8 33	.823	20 90	1.25	31.75	1.95	49 5
				1.30	33.0	2.10	53.34

(B) NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3 Metric equivalents are given for general information only.
4. This accessory will not accommodate connectors using 8, 4, and 0 contacts.

FIGURE 1. Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction.

Dimensions and configuration See figure 1 and table I

Interface dimensions shall conform to MIL-C-38999, series I and II.

Clamps shall have no protrusions or sharp edges which may pinch cable

In the assembled mode, the coupling nut shall be captivated to the adapter body and free to rotate.

(B) Figure 1 dimensions K_{MAX} are applicable when the end of the screw is flush with -BB- or a maximum of two screws threads protrude.

Material

Coupling nut, ring, clamp, saddle bars Aluminum alloy in accordance with MIL-C-85049.

Fasteners 300 series corrosion resistant steel, passivated

Finish In accordance with MIL-C-85049.

(B) Aluminum components 1/ N, 2/ W.

Part number: See example below

M85049/	65	-10	W
Military designator			
Specification sheet			
Accessory shell size (see table I)			
Finish			

Qualification

See MIL-C-85049, category 4C. Accessory shell be tested with MIL-C-38999 series I connector.

QPL evaluating activity: Naval Avionics Center, Code B/444, 6000 East 21st Street, Indianapolis, Indiana 46219-2189.

1/ N Not for Navy use Air Force For space applications only
(B) 2/ W is not for use in space application

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC
Air Force - 11, 15, 19, 99
DLA - ES

Civil agencies coordinating activity
NASA - NA

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5935-3607-02)

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:13Z
Check the source to verify that this is the current version before use.