MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, SPLIT STRAIGHT, CATEGORY 4C
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3
AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

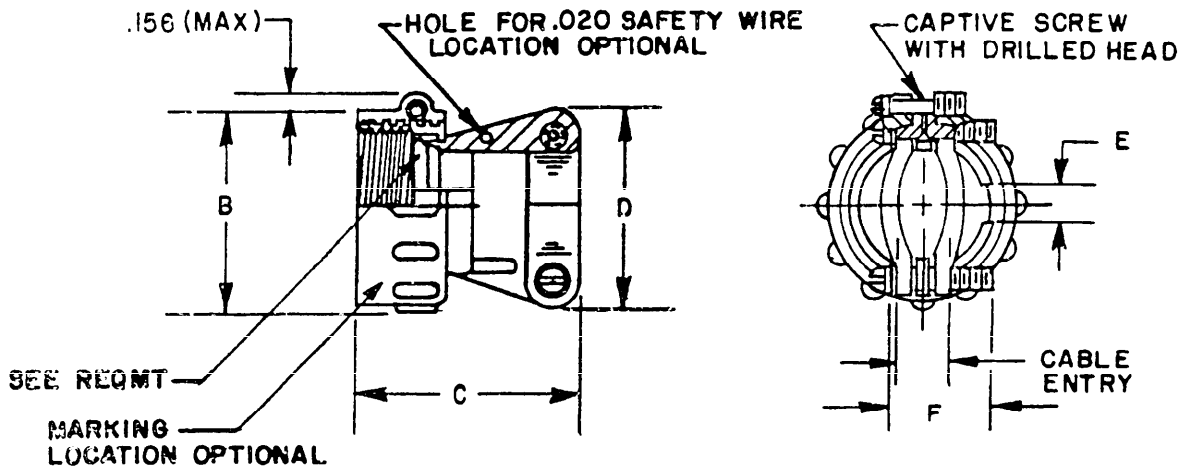


FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	For connector shell size (ref) MIL-C-81703 Series 3	MIL-C-26482 Series 2	MIL-C-5015 Crimp	MIL-C-83723 Series III	B Max Dia	C Max Dim	D Max Dim	E Min Slot	F ±.032 screw length	Screw size	Cable range Max	Cable range Min
8		8	8S	8	.750	.952	.752	.125	.500	6-32	.204	.125
10		10	10S,10SL	10	.875	1.062	.832	.125	.500	6-32	.286	.187
12	7	12	12S,12	12	1.000	1.188	.988	.188	.625	6-32	.416	.291
14	12	14	14S,14	14	1.125	1.188	1.046	.188	.625	6-32	.476	.351
16	19	16	16S,16	16	1.250	1.312	1.319	.188	.625	6-32	.625	.501
18	27	18	18	18	1.312	1.562	1.451	.250	.750	8-32	.706	.518
20	37	20	20	20	1.438	1.688	1.557	.250	.875	8-32	.831	.581
22		22	22	22	1.562	1.812	1.653	.312	1.000	8-32	.956	.644
24		24	24	24	1.688	1.938	1.775	.312	1.125	8-32	1.081	.706
28			28		2.000	2.250	2.020	.312	1.250	8-32	1.187	.750
32			32		2.250	2.438	2.386	.312	1.250	1/4-20	1.250	.875
36			36		2.500	2.812	2.496	.312	1.500	1/4-20	1.375	.938
40			40		2.750	3.000	2.566	.312	1.500	1/4-20	1.500	.938
44			44		3.000	3.375	2.860	.312	1.750	1/4-20	1.750	1.188

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.032	.81	.581	14.76	1.125	28.58	1.812	46.02
.125	3.18	.625	15.88	1.183	30.05	1.938	49.23
.156	3.96	.644	16.36	1.188	30.18	2.000	50.80
.187	4.75	.706	17.93	1.234	31.34	2.020	51.31
.188	4.78	.750	19.05	1.250	31.75	2.250	57.15
.204	5.18	.752	19.10	1.296	32.92	2.386	60.60
.250	6.35	.831	21.11	1.312	33.32	2.438	61.93
.286	7.26	.832	21.13	1.358	34.49	2.496	63.40
.291	7.39	.875	22.23	1.375	34.93	2.500	63.50
.312	7.92	.938	23.83	1.438	36.53	2.566	65.18
.315	8.00	.952	24.18	1.451	36.86	2.750	69.85
.351	8.92	.956	24.28	1.500	38.10	2.812	71.42
.416	10.57	.988	25.10	1.562	39.67	2.860	72.64
.476	12.09	1.000	25.40	1.653	41.99	3.000	76.20
.500	12.70	1.046	26.57	1.688	42.88	3.375	85.73
.501	12.73	1.062	26.97	1.750	44.45		
.518	13.16	1.081	27.46	1.775	45.09		

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. This clamp will not accommodate connectors using 8, 4 and 0 contacts.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MS3155.

Material:
Coupling nut, ring, clamp, saddle bars - aluminum alloy in accordance with MIL-C-85049.
Fasteners - stainless steel, 300 series.

Finish:
Aluminum components - W
Fasteners - S 1/ N

Part number: See example below:

M85049/ 66 - 10 W

Military designator
Specification sheet
Dash number
Finish

QUALIFICATION:
See MIL-C-85049, category 4C.
QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

1/ Not for Navy use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-85)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.