MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, SPLIT 90°, CATEGORY 4C
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3
AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

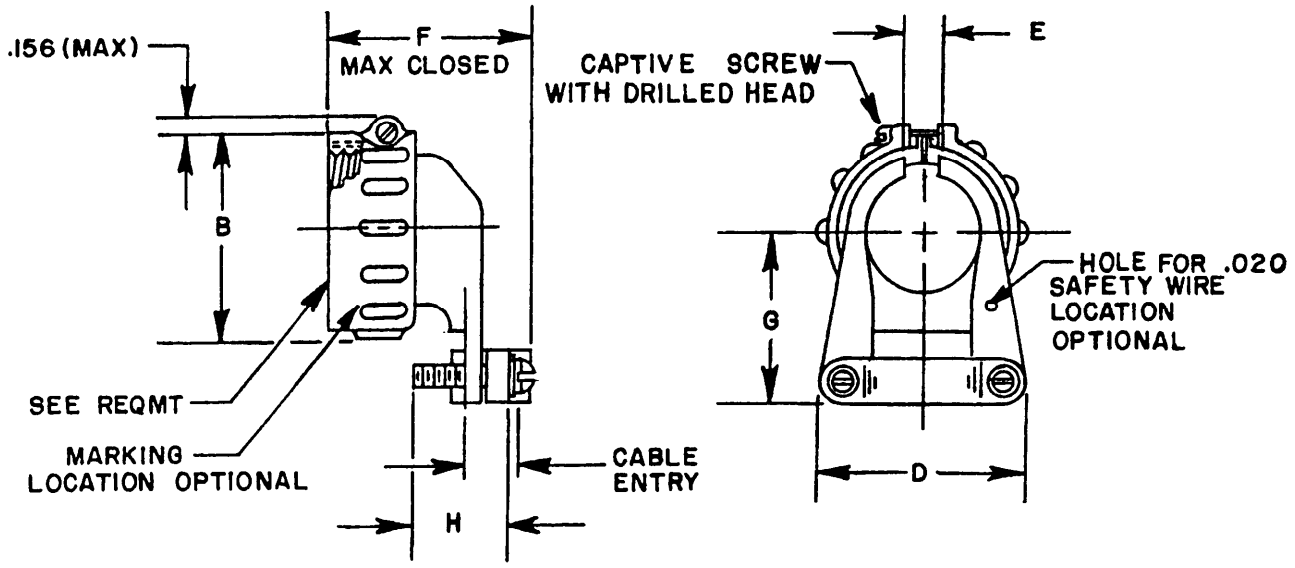


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Dash number	For connector shell size (REF) MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III	B max dia	D max dim.	E min slot	F max dim	G max dim	H ±.032 screw length	Screw size	Cable range max	Cable range min
8		8	8S	8	.750	.752	.125	1.101	.812	.500	6-32	.204	.125
10		10	10S, 10SL	10	.875	.832	.125	1.183	.875	.500	6-32	.286	.187
12	7	12	12S, 12	12	1.000	.988	.188	1.376	.938	.625	6-32	.416	.291
14	12	14	14S, 14	14	1.125	1.046	.188	1.436	1.000	.625	6-32	.476	.351
16	19	16	16S, 16	16	1.250	1.319	.188	1.585	1.062	.625	6-32	.625	.501
18	27	18	18	18	1.312	1.451	.250	1.697	1.234	.750	8-32	.706	.518
20	37	20	20	20	1.438	1.557	.250	1.822	1.296	.875	8-32	.831	.581
22		22	22	22	1.562	1.653	.312	1.947	1.358	1.000	8-32	.956	.644
24		24	24	24	1.688	1.775	.312	2.072	1.420	1.125	8-32	1.081	.706
28			28		2.000	2.020	.312	2.372	1.634	1.250	8-32	1.187	.750
32			32		2.250	2.386	.312	2.435	1.859	1.250	1/4-20	1.250	.875
36			36		2.500	2.496	.312	2.560	1.984	1.500	1/4-20	1.375	.938
40			40		2.750	2.566	.312	2.685	2.109	1.500	1/4-20	1.500	.938
44			44		3.000	2.860	.312	2.935	2.358	1.750	1/4-20	1.750	1.188

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.032	.81	.706	17.93	1.312	33.32	2.020	51.31
.125	3.18	.750	19.05	1.358	34.49	2.072	52.63
.156	3.96	.752	19.10	1.375	34.93	2.109	53.57
.187	4.75	.831	21.11	1.376	34.95	2.250	57.15
.188	4.78	.832	21.13	1.436	36.47	2.258	57.35
.204	5.18	.872	21.15	1.438	36.53	2.358	59.89
.250	6.35	.875	22.23	1.451	36.86	2.372	60.25
.286	7.26	.938	23.83	1.500	38.10	2.386	60.60
.296	7.52	.956	24.28	1.557	39.55	2.435	61.85
.312	7.92	.988	25.10	1.562	39.67	2.496	63.40
.315	8.00	1.000	25.40	1.634	41.50	2.500	63.50
.351	8.92	1.046	26.57	1.653	41.99	2.560	65.02
.416	10.57	1.062	26.97	1.688	42.88	2.685	68.20
.476	12.09	1.081	27.46	1.697	43.10	2.750	69.85
.500	12.70	1.125	28.58	1.750	44.45	2.860	72.64
.501	12.73	1.183	30.05	1.775	45.09	3.000	76.20
.518	13.16	1.188	30.18	1.822	46.28		
.581	14.76	1.234	31.34	1.859	47.22		
.625	15.88	1.250	31.75	1.947	49.45		
.644	16.36	1.296	32.92	2.000	50.80		

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. This clamp will not accommodate connectors using size 8, 4 and 0 contacts.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MS3155.

Material:
Coupling nut, ring, clamp, saddle bars - aluminum alloy in accordance with MIL-C-85049.
Fasteners - stainless steel, 300 series.

Finish:
Aluminum components - W, 1/ N
Fasteners - S

Part number: See example below:

M85049/ 67 - 10 W

- M85049/ — Military designator
- 67 — Specification sheet
- 10 — Dash number
- W — Finish

QUALIFICATION:
See MIL-C-85049, category 4C.
QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

1/ Not for Navy use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-87)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:13Z
Check the source to verify that this is the current version before use.