
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, STRAIGHT, SELF-LOCKING, SHIELD BAND TERMINATION (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3 AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-85049.

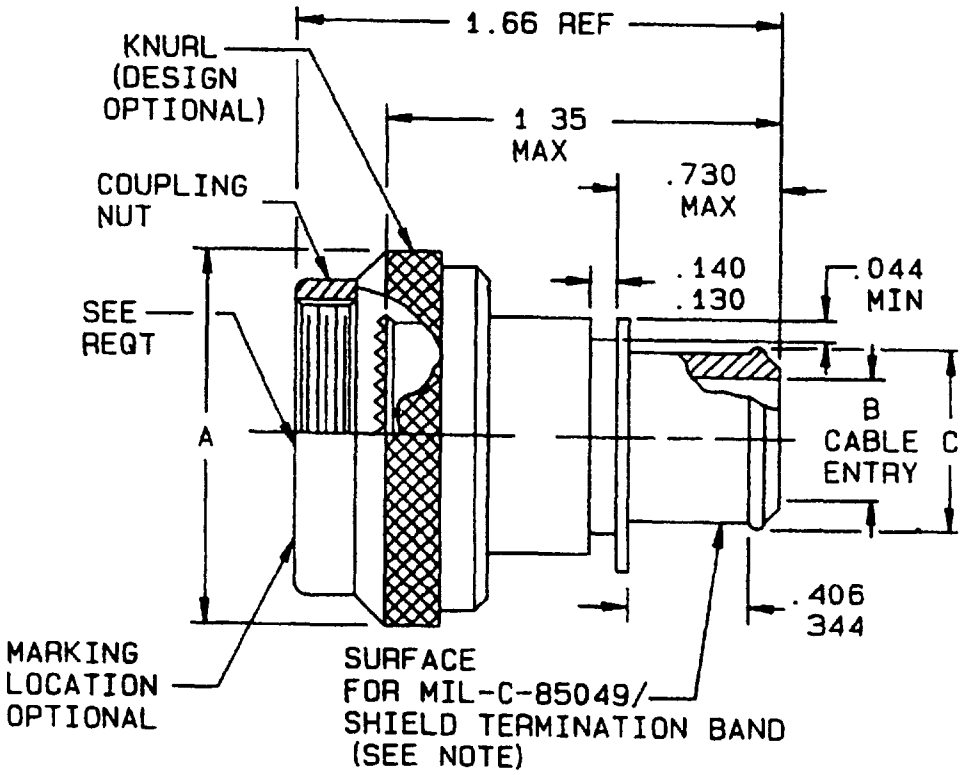


NOTE Ribbed, internal knurl or surface roughness R_A 125-250 in accordance with ANSI B46 1
See figure 2 for selective plating detail

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

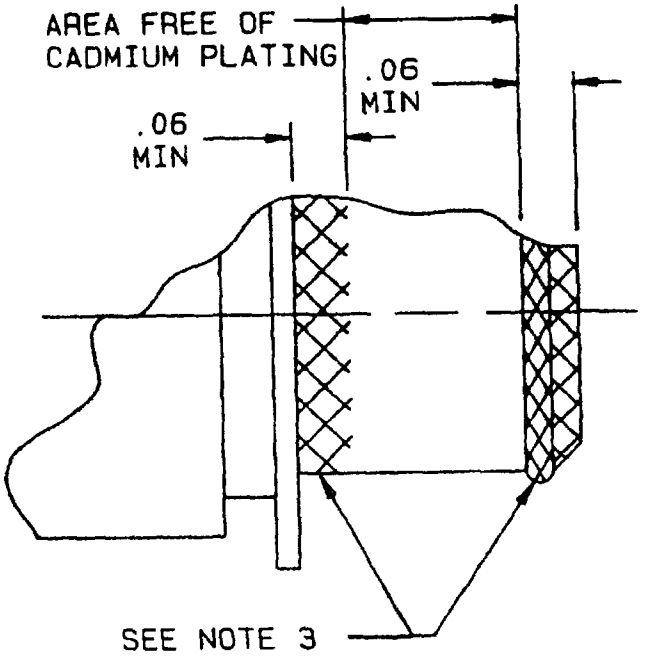

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.044	1.12	.500	12 70	750	19.05	957	24.30	1.190	30 23
130	3.30	562	14 27	770	19 56	1 000	25 40	1.260	32 00
.140	3 56	.583	14 81	812	20 62	1 010	25.65	1.270	32 26
.250	6.35	.625	15 88	829	21 06	1.020	25.91	1.385	35 18
.312	7 92	660	16 76	875	22 22	1 083	27 51	1.510	38.35
.395	10.03	684	17.37	.885	22 48	1.125	28 58	1 635	41.53
438	11.13	.707	17.96	895	22 73	1.135	28 83	1.750	44.45
.457	11.61	730	18 54	938	23 83	1 145	29.08	1 885	47 88
								2 135	54 23

NOTES.
1 Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2 Selective plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I Shell size and dimensions

Accessory shell size	For connector shell size (ref)				A max dia	B dia ± .010 entry size		C dia ref	
	MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III		02	03	02	03
08	---	8	8s	8	.885	N/A	250	N/A	395
10	---	10	10S, 10SL	10	1.010	N/A	.312	N/A	.457
12	7	12	12S and 12	12	1.135	.312	438	.457	583
14	12	14	14S and 14	14	1 260	.438	.562	.583	.707
16	19	16	16S and 16	16	1 385	.500	.625	.645	770
18	27	18	18	18	1.510	.625	.750	.770	895
20	37	20	20	20	1.635	.625	812	770	.957
22	---	22	22	22	1.760	.688	.938	829	1.083
24	---	24	24	24	1 885	.750	1.000	.895	1 145
28	---	---	28	---	2 135	.875	1.125	1 020	1.270

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1

Interface dimensions Shall conform to MIL-C-85049.

Coupling nut. Shall be captivated to the adapter body and free to rotate

Material and finish In accordance with MIL-C-85049 and table II herein

TABLE II. Material and finish

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium olive drab	Aluminum alloy

1/ Not for Navy use Limited to space applications for Air Force use

Vibration. Backshells shall be subjected to test parameters of applicable connector specifications The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN) See example below

M85049/ 82 - 16 P 02

Military designator

Specification sheet

Shell size (see table I)

Finish

Entry size

QUALIFICATION

Qualification See MIL-C-85049, category 3B

QPL evaluating activity Naval Air Warfare Center, Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent.
DLA - ES

(Project 5935-3760-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.