
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 45°, SELF-LOCKING, SHIELD, BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation.
MIL-C-85049

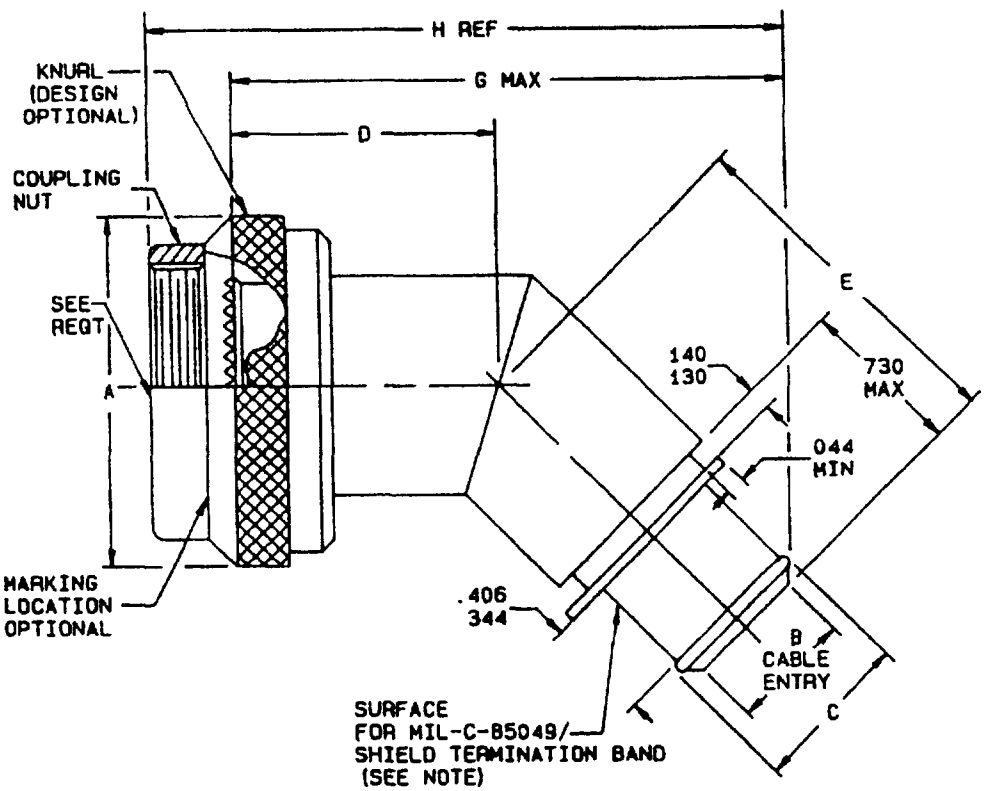


NOTE Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46 1 See figure 2 for selective plating details

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

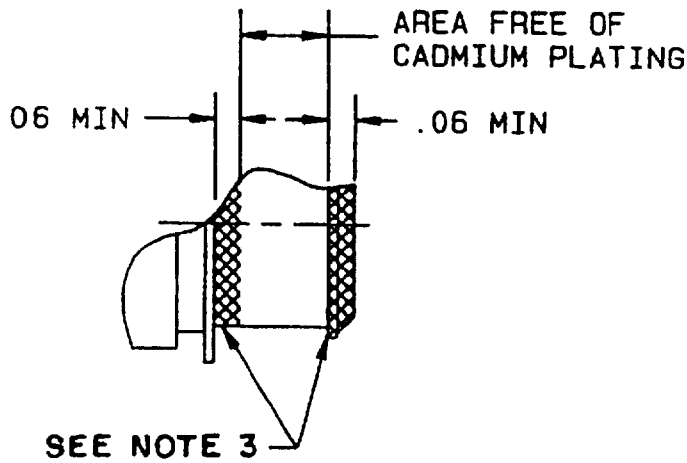

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
044	1.12	562	14.27	.829	21.06	960	24 38	1.135	28.83	1.310	33.27
060	1.52	583	14.81	.870	22.10	980	24 89	1 145	29.08	1 340	34.03
130	3 30	625	15.88	875	22 22	1 000	25 40	1 160	29 46	1 380	35 05
140	3 56	645	16.38	.885	22 48	1.010	25 65	1 180	29 97	1.385	35 18
250	6.35	688	17 48	890	22 61	1.020	25 91	1 200	30 48	1 510	38 35
312	7 92	.707	17 96	.895	22.73	1.030	26 16	1.220	30 99	1.542	39 17
.395	10.03	.730	18.54	.920	23.37	1.050	26.67	1.250	31.75	1 635	41.53
438	11 13	750	19.05	938	23.83	1.083	27 51	1 260	32 00	1.760	44.70
457	11 61	770	19.56	940	23 88	1 100	27.94	1 270	32 26	1 885	47 88
.500	12 70	812	20 62	.957	24 31	1 125	28 57	1 290	32 77	2 135	54 23

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 (25 4 mm)
3. Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2 Selective plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I Shell size and dimensions

Accessory shell size	For connector shell size (ref)				A max dia	B dia ± 010 entry size		C dia ref dim		D max dim	E max	G max with C		H ref with C	
	MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III		02	03	02	03			02	03	02	03
08	---	8	8s	8	885	N/A	250	N/A	395	87	1 16	N/A	1 830	N/A	2 135
10	---	10	10S, 10SL	10	1.010	N/A	.312	N/A	457	89	1.18	N/A	1.886	N/A	2.191
12	7	12	12S and 12	12	1 135	312	438	457	583	.92	1 20	1 930	1 975	2 235	2 280
14	12	14	14S and 14	14	1 260	438	562	583	707	.94	1.22	2 009	2.053	2.314	2 358
16	19	16	16S and 16	16	1.385	.500	625	.645	770	96	1 25	2 072	2.116	2.377	2.421
18	27	18	18	18	1.510	.625	.750	770	.895	98	1.26	2.143	2.187	2.448	2 492
20	37	20	20	20	1 635	625	.812	770	957	1 00	1.29	2 184	2.251	2.489	2 556
22	---	22	22	22	1 760	688	938	829	1.083	1 03	1.31	2 249	2 339	2.554	2.644
24	---	24	24	24	1 885	.750	1.000	895	1 145	1 05	1.34	2.314	2.402	2 619	2.707
28	---	---	28	---	2.135	.875	1.125	1 020	1.270	1.10	1.38	2.594	2.683	3.061	3 150

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configuration See figure 1 and table I

Interface dimensions Shall conform to MIL-C-85049

Coupling nut Shall be captivated to the adapter body and free to rotate

Material and finish In accordance with MIL-C-85049 and table II herein

TABLE II. Material and finish

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium olive drab	Aluminum alloy

1/ Not for Navy use Limited to space applications for Air Force use

Vibration: Backshells shall be subjected to test parameters of applicable connector specifications The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN) The PIN shall be in the following form

M85049/ 83 - 16 P 02

- Military designator
- Specification sheet
- Shell size, (see table I)
- Finish
- Entry size

QUALIFICATION

Qualification See MIL-C-85049, category 3B

QPL evaluating activity Naval Air Warfare Center, Code 8/444, 6000 East 21st Street, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity
Air Force - 85

Agent.
DLA - ES

(Project 5935-3760-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/83

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST.
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.