
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-85049.

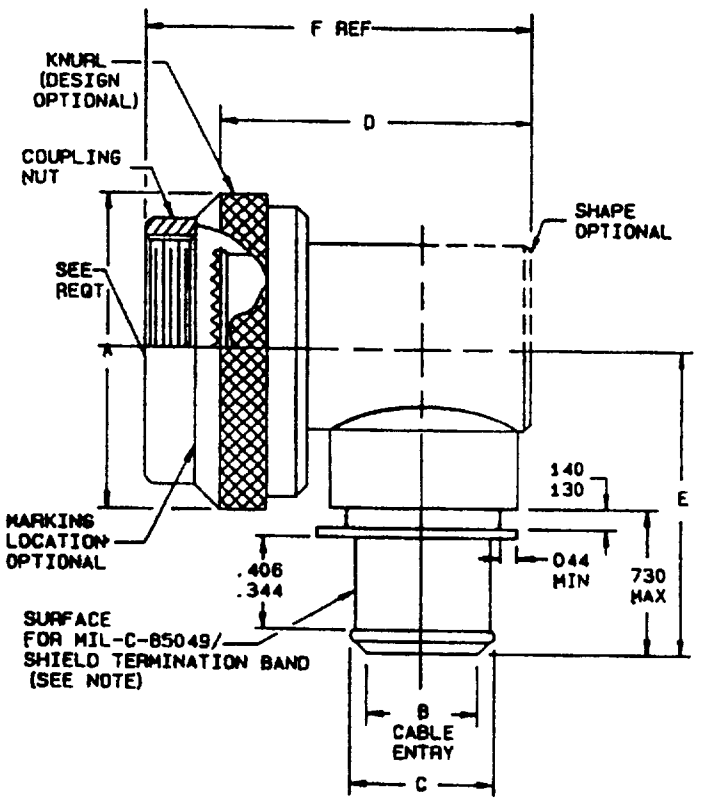


NOTE; Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46 1. See figure 2 for selective plating details

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

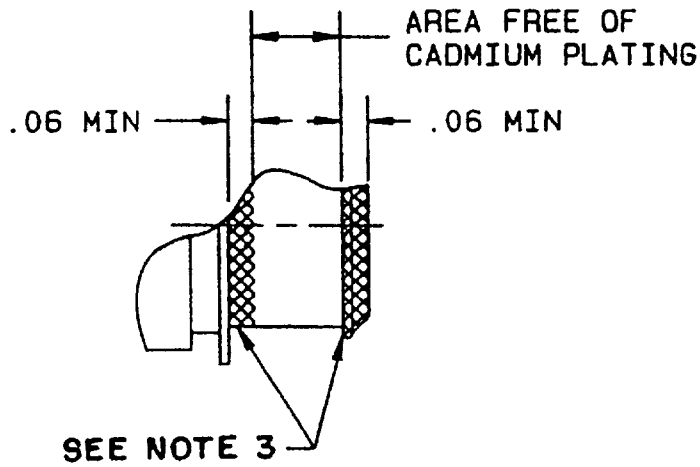

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.044	1 12	.660	16.76	.957	24.31	1 270	32.26	1 635	41.53	1.906	48.41
.130	3.30	.684	17.37	1.000	25.40	1.343	34 11	1 656	42.06	1.917	48.69
140	3.56	707	17 96	1 010	25 65	1.385	35 18	1 667	42 34	1 965	49 91
250	6.35	.730	18 54	1.020	25.91	1.417	35 99	1 715	43 37	2.027	51 49
.312	7.92	750	19.05	1 083	27.51	1.468	37.29	1.718	43.64	2.031	51 59
.395	10 03	.770	19 56	1.125	28.58	1 480	37.59	1.730	43.94	2 042	51.87
438	11 13	.812	20 62	1.135	28.83	1 497	38 02	1 750	44 45	2 135	54.23
457	11 61	.829	21.06	1.145	29.08	1.510	38 35	1 792	45 52	2.153	54.69
500	12 70	.875	22.22	1 156	29.36	1.531	38 89	1 840	46 74	2.247	57.07
562	14 27	.885	22 48	1 160	29.46	1.542	39.17	1 843	46 81	2 402	61.01
.583	14 81	.895	22.73	1.218	30.94	1.590	40.37	1.850	46 99	3 002	76.25
625	15 88	.938	23 83	1.260	32.00	1.605	40 77	1 885	47.88		

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm
3. Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2 Selective plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I Shell size and dimensions

Accessory shell size	For connector shell size (ref)				A max dia	B dia ±.010 entry size		C dia ref		D max dim	E max dim	F ref
	MIL-C-81703 series 3	MIL-C-26482 series 2	MIL-C-5015 crimp	MIL-C-83723 series III		02	03	02	03			
08	---	8	8s	8	885	N/A	.250	N/A	395	1 188	1 417	1 497
10	---	10	10S, 10SL	10	1 010	N/A	312	N/A	457	1 281	1 480	1.590
12	7	12	12S and 12	12	1 135	312	438	.457	.583	1.406	1.542	1 715
14	12	14	14S and 14	14	1 260	.438	562	583	.707	1 531	1.605	1 84
16	19	16	16S and 16	16	1 385	.500	.625	.645	.770	1.656	1.667	1.965
18	27	18	18	18	1 510	625	750	.770	.895	1.718	1 730	2 027
20	37	20	20	20	1 635	625	812	770	.957	1.844	1.792	2.153
22	---	22	22	22	1 760	684	938	829	1 083	1 938	1.850	2.247
24	---	24	24	24	1 885	750	1 000	895	1.145	2.093	1.917	2 402
28	---	---	28	---	2 135	875	1 125	1 020	1.270	2 531	2 042	3 002

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction.

Dimensions and configuration See figure 1 and table I

Interface dimensions Shall conform to MIL-C-85049

Coupling nut Shall be captivated to the adapter body and free to rotate

Material and finish: In accordance with MIL-C-85049 and table II herein

TABLE II Material and finish.

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium olive drab	Aluminum alloy

1/ Not for Navy use Limited to space applications for Air Force use

Vibration Backshells shall be subjected to test parameters of applicable connector specifications. The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN) See example below:

M85049/ 84 - 16 P 02

Military designator

Specification sheet

Shell size, see table I

Finish

Entry size

QUALIFICATION

Qualification See MIL-C-85049, category 3B

QPL evaluating activity: Naval Air Warfare Center, Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3760-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/84

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.