
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 45°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-85049.

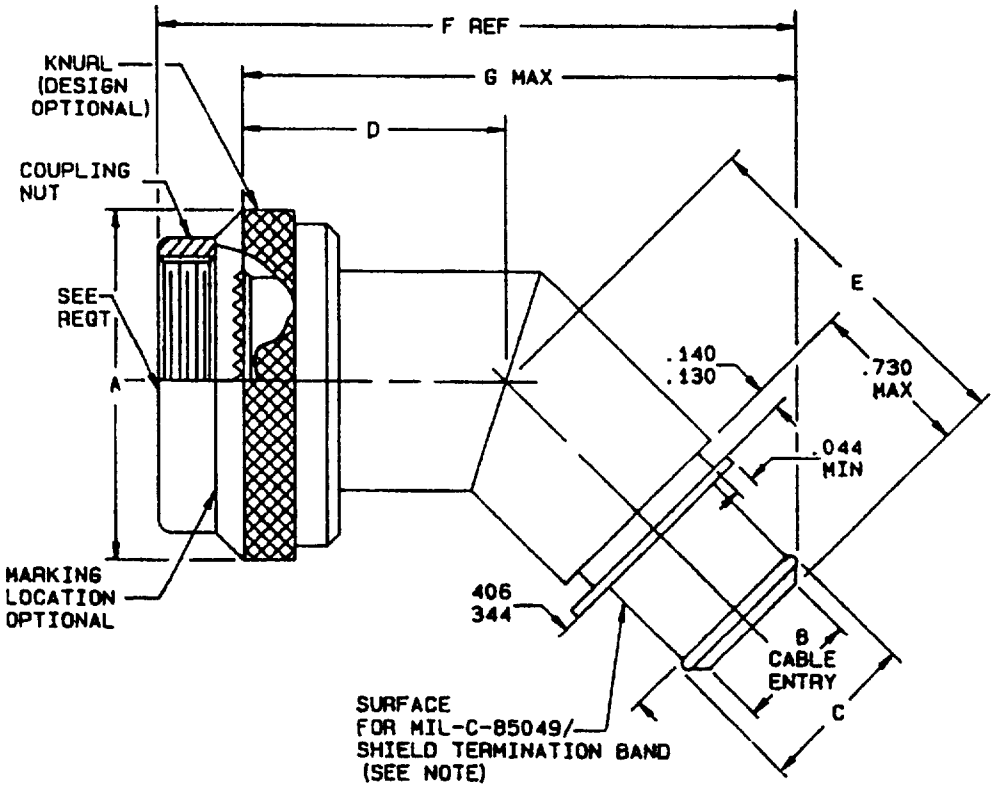


NOTE Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46.1. See figure 2 for selective plating details

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

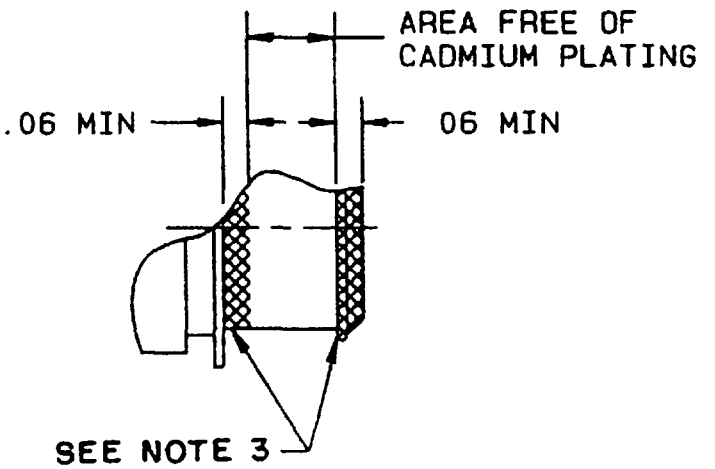

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.044	1.12	.500	12 70	.770	19.56	950	24.13	1.145	29.08	1.300	33 02
060	1.52	562	14 27	812	20 62	.957	24 30	1 156	29 36	1 330	33 78
130	3.30	583	14 81	.829	21.06	980	24 89	1.160	29.46	1 350	34 29
140	3.56	625	15 88	859	21.81	.984	24 99	1 190	30 23	1 406	35 71
250	6.35	645	16 38	.870	22.10	1 000	25.40	1.210	30.73	1.516	38.51
312	7 92	688	17 48	895	22.73	1 010	25 65	1.240	31 50	1 641	41 68
395	10.03	707	17 96	900	22 86	1 040	26 42	1.260	32 00	1 766	44 86
438	11 13	730	18 54	.920	23 37	1 070	27 18	1 270	32 26	1 891	48 03
457	11 61	750	19 05	.938	25 83	1.083	27.51	1 281	32 54		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 (25 4 mm)
3. Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2. Selective plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I. Shell size and dimensions.

Accesory shell size	Connector shell size		A max dia	B dia ± 010 entry size		C dia ref		D max dim	E max dim	G max		F ref	
	Series I	Series II		02	03	02	03			02	03	02	03
08	9	8	.859	N/A	.250	N/A	395	87	1.16	1.69	1.83	1.878	2 018
10	11	10	984	N/A	312	N/A	457	.90	1.19	1 741	1 903	1.929	2 091
12	13	12	1.156	312	.438	.457	.583	.92	1.21	1 937	1.982	2.125	2 17
14	15	14	1.281	.438	562	.583	.707	.95	1.24	2.033	2.077	2.221	2 265
16	17	16	1.406	500	625	645	770	98	1.26	2 099	2 143	2.287	2 331
18	19	18	1 516	625	750	.770	895	98	1.27	2.15	2.194	2.338	2.382
20	21	20	1 641	625	812	770	957	1 01	1.30	2 201	2 268	2.389	2 456
22	23	22	1.766	688	938	829	1 083	1 04	1.33	2 274	2.363	2.462	2 551
24	25	24	1.891	750	1 000	.895	1 145	1 07	1.35	2.341	2 429	2.529	2 617

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Interface dimensions: Shall conform to MIL-C-85049

Coupling nut Shall be captivated to the adapter body and free to rotate

Material and finish: In accordance with MIL-C-85049 and table II

TABLE II. Material and finish.

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium olive drab	Aluminum alloy

1/ Not for Navy use Limited to space applications fors Air Force use.

Vibration Backshells shall be subjected to test parameters of applicable connector specifications. The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN). The PIN shall be in the following form

85049/ 86 - 16 P 02

Military designator

Specification sheet

Shell size, see table I

Finish

Entry size

QUALIFICATION:

Qualification See MIL-C-85049, category 3B

QPL evaluating activity: Naval Air Warfare Center, Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3760-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/86

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.