INCH-POUND


MIL-C-85049/87
18 August 1992

MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 90°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-C-38999 SERIES I AND II CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-85049

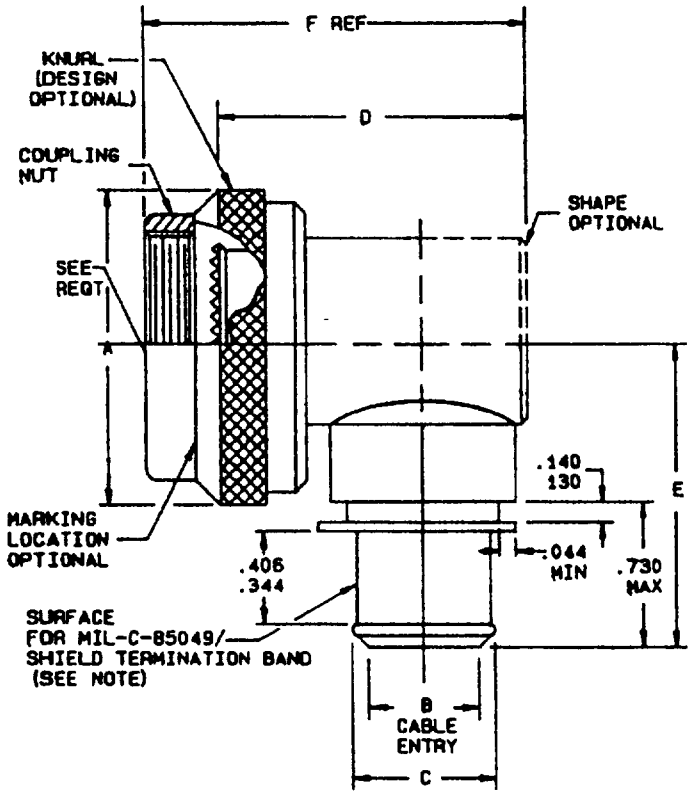


NOTE Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46 1 See figure 2 for selective plating details

FIGURE 1 Configuration and dimensions

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

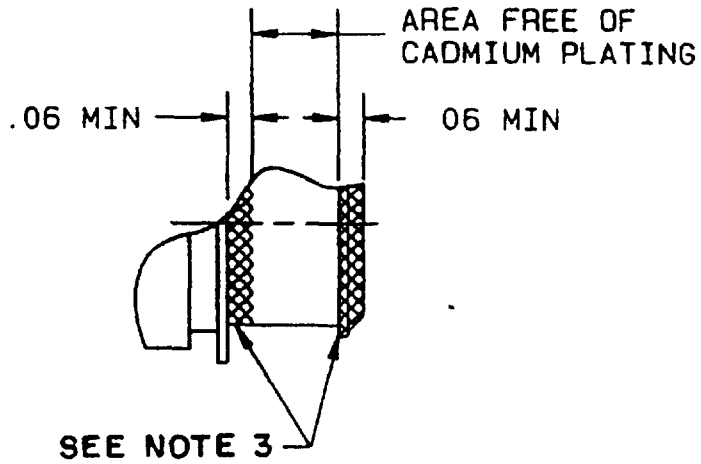

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
044	1 12	583	14 81	895	22.73	1 404	35 66	1 678	42 62
130	3.30	625	15.88	.938	23.83	1.406	35.71	1 718	43 64
.140	3.56	.660	16.76	.957	24.31	1 467	37.26	1 733	44.02
.250	6 35	684	17.37	.984	24.99	1 468	37.29	1 768	44.90
.312	7 92	707	17.96	1 000	25 40	1.516	38.51	1 796	45.62
395	10 03	750	19.05	1 083	27.51	1 531	38.89	1 843	46 81
438	11 13	770	19 56	1.145	29.08	1 553	39.45	1.859	47 22
457	11 61	812	20 62	1.157	29.36	1 614	41.00	1 889	47 98
500	12 70	.829	21.05	1.310	33 27	1 642	41.71	1 906	48 41
562	14.27	858	21 79	1.343	34 11	1.656	42 06	1 919	48.74

NOTES

1 Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1 00 (25 4 mm)
3 Cadmium/nickel interface shall be coated with polysulfide sealant

FIGURE 2 Selective plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

TABLE I Shell size and dimensions

Accessory shell size	Connector shell size		A max dia	B dia ± 010 entry size		C dia ref		D max dim	E max dim	F ref
	Series I	Series II		02	03	02	03			
08	8	9	.858	N/A	.250	N/A	.395	1.375	1.417	1.563
10	10	11	.984	N/A	.312	N/A	.457	1 437	1.480	1.625
12	12	13	1.157	.312	.438	.457	.583	1.562	1 553	1 750
14	14	15	1.279	438	.562	.583	.707	1.687	1.614	1.875
16	16	17	1 406	.500	625	.645	770	1 750	1 678	1.938
18	18	19	1 516	.625	.750	770	895	1 875	1.733	2.063
20	20	21	1.642	.625	.812	770	957	1 938	1 796	2.126
22	22	23	1.768	.684	.938	.829	1.083	2.062	1.859	2.250
24	24	25	1.889	.750	1 000	.895	1 145	2.125	1 919	2 313

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configuration See figure 1 and table I

Interface dimensions. Shall conform to MIL-C-85049

Coupling nut. Shall be captivated to the adapter body and free to rotate

Material and finish In accordance with MIL-C-85049 and table II herein

TABLE II. Material and finish.

Finish	Material
N - Electroless nickel 1/ P - Cadmium olive drab over electroless nickel (selective plating, see figure 2) W - Cadmium olive drab	Aluminum alloy

1/ Not for Navy use Limited to space applications for Air Force use

Vibration: Backshells shall be subjected to test parameters of applicable connector specifications The coupling torque shall be within +20, -10 inch-pounds of the initial value

Part or Identifying Number (PIN): See example below

M85049/ 87 - 16 P 02

Military designator

Specification sheet

Shell size, see table I

Finish

Entry size

QUALIFICATION.

Qualification. See MIL-C-85049, category 3B.

QPL evaluating activity Naval Air Warfare Center, Code B/444, 6000 East 21st Street, Indianapolis, IN 46219-2189.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 19, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3760-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
STANDARDIZATION
CUSTOMER SATISFACTION INQUIRY

TELEPHONE - COM 513-296-5517 DSN 986-5517
FAX - COM 513-296-8783 DSN 986-8783

VERY DISSATISFIED	DISSATISFIED	SOMEWHAT DISSATISFIED	SOMEWHAT SATISFIED	SATISFIED	VERY SATISFIED	NOT APPLICABLE
1	2	3	4	5	6	7

(PLEASE ENTER THE VALUE THAT YOU FEEL IS APPROPRIATE)

I. STAFF

1. PROVIDERS QUALIFICATIONS/COMPETENCE---------- ☐

2. PROVIDERS PROFESSIONALISM---------- ☐

	TIMELINESS	QUALITY
3. PROVIDERS RESPONSE TO YOUR INITIAL REQUEST----------	☐	☐

II. PRODUCT

	TIMELINESS	QUALITY
1. INITIAL DRAFT----------	☐	☐
2. REVISION/AMENDMENT SATISFIED YOUR REQUIREMENT----------	☐	☐

III. COMMENTS/SUGGESTIONS

(CONSTRUCTIVE COMMENTS OR SUGGESTIONS APPRECIATED)

MIL-C-85049/87

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.

"Please Fold and Tape"

First Class

Official Business

DEPARTMENT OF THE AIR FORCE
2750 LOG/ES
GENTILE STATION
1060 HAMILTON ST.
DAYTON, OHIO 45444-5400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:14Z
Check the source to verify that this is the current version before use.