INCH-POUND


MIL-C-17/134C
13 April 1993
SUPERSEDING
MIL-C-17/134B
18 July 1985

MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, TRIAXIAL, .245 INCH, 50 OHM, WATERBLOCKED, NON-WATER BLOCKED AND CROSSLINKED, LOW SMOKE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification listed in that issue of the Department of Defense Index of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-17.

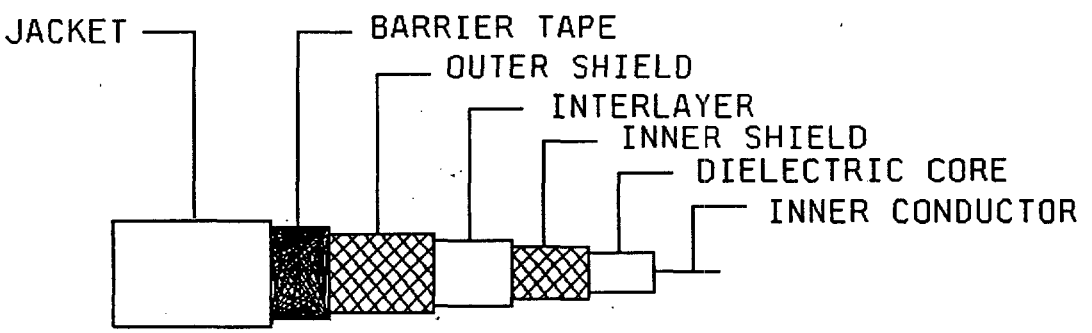

CABLE SHOULD BE CONSTRUCTED OF NON-TOXIC MATERIAL

FIGURE 1. General configuration.

Changes to the text have been highlighted.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

TABLE I. Description.

Component	Construction
Inner conductor	Solid strand of silver-coated copper wire. Diameter: .033 inch ±0.001.
Dielectric core	Type A-1: Solid polyethylene. Diameter: .116 inch ±0.004.
Inner shield	Single braid of AWG No. 36 silver-coated copper wire. Diameter: .150 inch maximum. Coverage: 90%, minimum. Carriers: 16 Ends: 6 Picks/inch: 10.4 Separator tape optional.
Interlayer (M17/134-00001 and M17/134-00002)	Type A-1: Solid Polyethylene Diameter: .175 inch ±.005.
Interlayer (M17/134-00003 and M17/134-00004)	Cross-linked polyolefin. Diameter: .175 inch ±.005.
Outer shield M17/134-00001 through M17/134-00004	Single braid of AWG No. 36 silver-coated copper wire. Diameter: .203 inch, maximum. Coverage: 90%, minimum. Carriers: 16 Ends: 8 Picks/inch: 9.8 Separator tape optional.
Barrier tape M17/134-00003 and M17/134-00004	A .001 inch thick polyester tape faced with a .002 inch thick layer of aluminum. The tape will be applied with a 50% overlap minimum, aluminum face toward the outer conductor. Diameter: .203 inch, maximum.
Jacket M17/134-00003 and M17/134-00004	Cross-linked polyolefin. Diameter: .245 inch ±.005
Jacket M17/134-00001 and M17/134-00002	Type IIIa: Polyethylene. Diameter: .245 inch ±.005.

Note: Free strippable blocking compound needed where necessary to meet hydrostatic test. The inner shield may be partially imbedded in the dielectric. Applicable to water blocked cables only.

ENGINEERING INFORMATION:

Continuous working voltage: 1,400 V rms, maximum.

Operating frequency: 3 GHz, maximum.

Velocity of propagation: 65.9 percent, nominal.

Power rating: See figure 2.

Operating temperature range:

-40°C to +70°C (M17/134-00001 and M17/134-00002)
-30°C to +85°C (M17/134-00003 and M17/134-00004)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

Inner conductor properties:

DC resistance (maximum at 20°C): 1.05 ohms per 100 feet.

Elongation: 25 percent, minimum.

Tensile strength: Not applicable.

Engineering note: This cable useful for nonhosing low temperature applications.

REQUIREMENTS:

Dimensions, configuration, and description: See figure 1 and table I.

Environmental and mechanical:

Visual and mechanical examination:

Out-of-roundness: Not applicable.

Eccentricity: 10 percent, maximum.

Adhesion of conductors:

M17/134-0000X: 2 pounds minimum, 20 pounds maximum.

Aging stability:

+90°C ±2°C (M17/134-00001 and M17/134-00002)
+98°C ±2°C (M17/134-00003 and M17/134-00004)

Stress crack resistance: Not applicable.

Outer conductor integrity: Not applicable.

Cold bend:

-55°C ±2°C (M17/134-00001 and M17/134-00002)
-30°C ±2°C (M17/134-00003 and M17/134-00004)

Dimensional stability: +85°C ±2°C.

Inner conductor from core: .062 inch, maximum.

Inner conductor from jacket: .125 inch, maximum.

Contamination: Not applicable.

Bendability: Not applicable.

Flammability: Not applicable.

Flame propagation: Applicable 1/

Acid gas generation: 2.0 percent, maximum 1/

Halogen content: 0.2 percent, maximum 1/

1/ Applicable to M17/134-0003 and M17/134-0004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

Immersion test: 1/

Tensile strength, percent of unaged minimum: 50 1/

Elongation, percent of unaged minimum: 50 1/

Smoke index: 25 maximum 1/

Toxicity index: 5 maximum 1/

Durometer hardness: (type A) 80 minimum 1/

Weathering: Applicable 1/

Abrasion resistance: 75 cycles minimum (jacket only) 1/

Tear strength: 35 pounds per inch minimum 1/

Heat distortion: 30 percent maximum distortion 1/

Physical tests on unaged jacket:

Tensile strength: 1,300 psi, minimum 1/

Elongation: 160 percent, minimum 1/

Physical tests on aged jacket: 1/

Air oven:

Tensile strength, percent minimum: 60

Elongation, percent minimum: 60

Hot oil immersion: 1/

Tensile strength, percent minimum: 50

Elongation, percent minimum: 50

Tensile strength and elongation: 1,300 psi, 160 percent, minimum. 1/


Weight: 4.5 pounds per 100 feet, maximum (M17/134-00001 and M17/134-00002).
5 pounds per 100 feet, maximum (M17/134-00003 and M17/134-00004).

Watertightness (not applicable to M17/134-00002 or M17/134-00004): One end of a five foot length of completed cable shall be placed in a terminal fitting which will allow water pressure to be applied directly to the exposed cross-sectional area of the end of the cable. Exposure of the sides of the cable to water shall be kept to a minimum, and the fitting shall not exert radial compression against the cable. Unless otherwise approved by the qualifying activity, the sealer used for the packing gland in the terminal fitting shall be a metal alloy having a maximum melting point of 88°C. The specimen shall be subjected to a water pressure of 25 lb_f/in^2 for a period of 6 hours. Any evidence of water leakage shall be a cause for rejection.

Hydrostatic (open end) (not applicable to M17/134-00002 or M17/134-00004): A 5-foot specimen of completed cable shall be fitted into a gland similar to USL 44500B-12. The cable shall be capable of withstanding 1,000 lb_f/in^2 applied to the gland end of the specimen for a period of 2 hours. Any evidence of water leakage shall be cause for rejection.

1/ Applicable to M17/134-00003 and M17/134-00004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

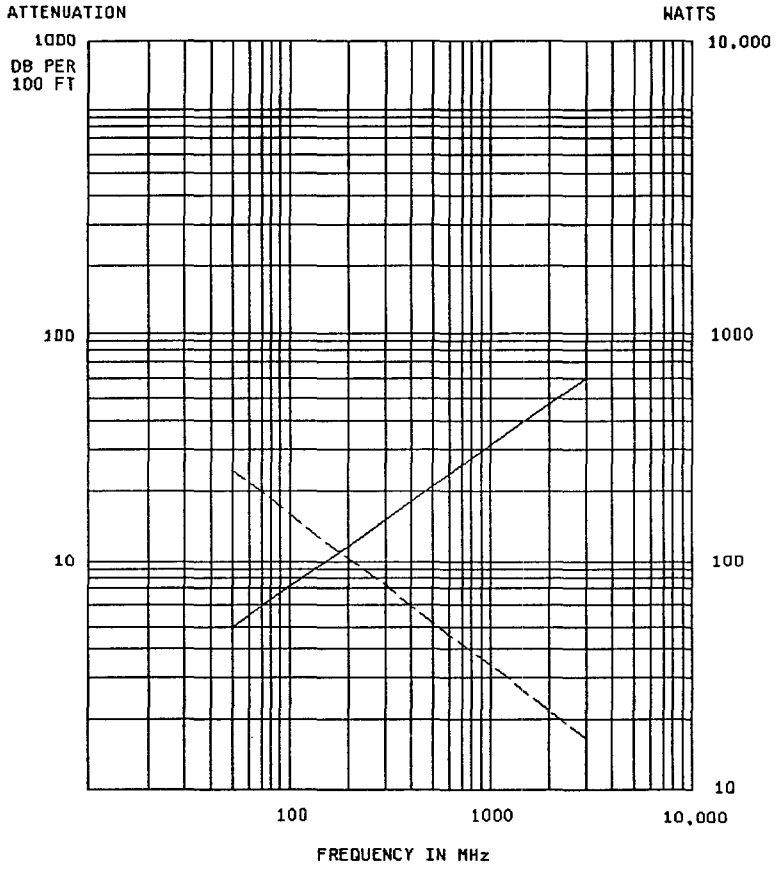

Maximum power - - - at 25°C sea level

Maximum attenuation ————————

Frequency MHz	Attenuation dB	Watts dB
50	4	240
100	6	150
1000	26	33
3000	60	16

Test requirements shall be as line indicated on graph.

FIGURE 2. Power rating and attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

SWR	Reflection coefficient	Return loss dB	SWR	Reflection coefficient	Return loss dB
17.3910	.8913	1	1.3767	.1585	16
8.7242	.7943	2	1.3290	.1413	17
5.8480	.7079	3	1.2880	.1259	18
4.4194	.6310	4	1.2528	.1122	19
3.5698	.5623	5	1.2222	.1000	20
3.0095	.5012	6	1.1957	.0891	21
2.6146	.4467	7	1.1726	.0794	22
2.3229	.3981	8	1.1524	.0708	23
2.0999	.3548	9	1.1347	.0631	24
1.9250	.3162	10	1.1192	.0562	25
1.7849	.2818	11	1.1055	.0501	26
1.6709	.2512	12	1.0935	.0447	27
1.5769	.2239	13	1.0829	.0398	28
1.4985	.1995	14	1.0736	.0355	29
1.4326	.1778	15	1.0653	.0316	30

Frequency MHz	Min SRL
50	27
400	24.4
1000	22.5
2000	21.5
3000	20

(Test requirements shall be noted as line indicated on graph).

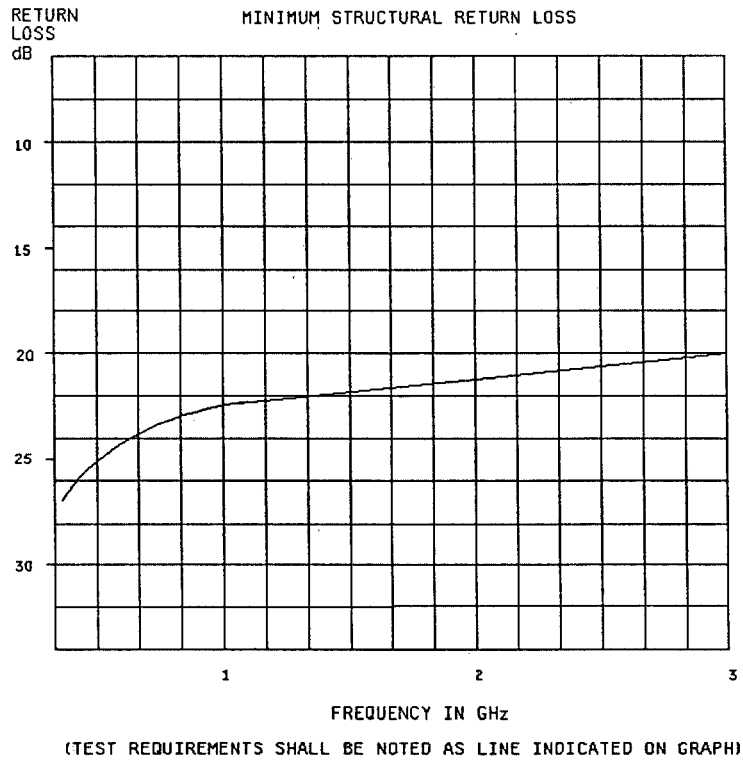


FIGURE 3. Structural return loss.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

Electrical:

Continuity: Applicable.

Spark test: 5,000 V rms, +10%, -0%.

Voltage withstanding: 5,000 V rms minimum applied between the inner and outer conductors with the outer conductor grounded; 500 V dc minimum applied between the outer conductor and the extra shield with the extra shield grounded.

Insulation resistance: Not applicable.

Corona extinction voltage: 1,900 V rms, minimum.

Characteristic impedance: 50 ohms ±2.

Attenuation: See figure 2.

Structural return loss: See figure 3.

Capacitance: 32.2 pF per foot, maximum.

Capacitance stability: Not applicable.

Capacitance unbalance: Not applicable.

Transmission unbalance: Not applicable.

Mechanically induced noise voltage: Not applicable.

Time delay: Not applicable.

Part number: See table II.

Supersession data: See table II.

TABLE II. Cross-reference of part number.

Part number	Superseded Part number or type designation	Type
M17/134-00001	TRF58	Water blocked
M17/134-00002	YR19210	Non-water blocked
M17/134-00003	AA-7557	Water blocked
M17/134-00004	AA-7558	Non-water blocked

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, TD
Air Force - 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA-ES

(Project 6145-2019)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:16Z
Check the source to verify that this is the current version before use.