MILITARY SPECIFICATION SHEET

# CABLE, RADIO FREQUENCY, FLEXIBLE COAXIAL, 95 OHMS, M17/139-00001

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cables described herein shall consist of this specification and the latest issue of MIL-C-17.

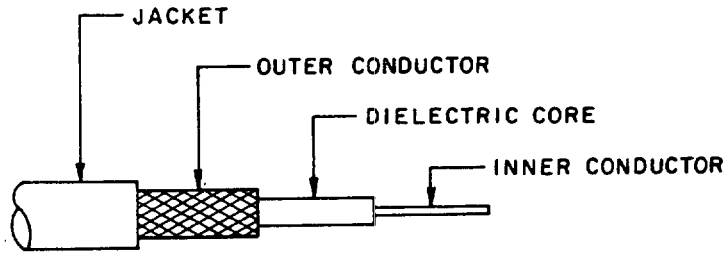



FIGURE 1. Configuration.

TABLE I. Description.

| Components | Construction details |
|---|---|
| Inner conductor | Seven strands of silver-coated, beryllium copper, C17200 1/ 0.004 inch each.<br>Overall diameter: 0.012 inch ±0.001. |
| Dielectric core | Type F-1: Solid extruded PTFE.<br>Diameter: 0.102 inch ±0.003. |
| Outer conductor | Single braid of AWG No.38, silver-coated cadium bronze, C16200 1/.<br>Diameter: 0.124 inch, maximum.<br>Coverage: 91.0% nominal<br>Carriers: 16<br>Ends: 7<br>Picks/inch: 12.0% ±10 |
| Jacket | Type XIII: PFA.<br>Diameter: 0.141 inch ±0.004. |


1/ Reference C16200 in accordance with ASTM B-105 and C17200 in accordance with ASTM B-197.

(P) denotes changes



FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:18Z
Check the source to verify that this is the current version before use.

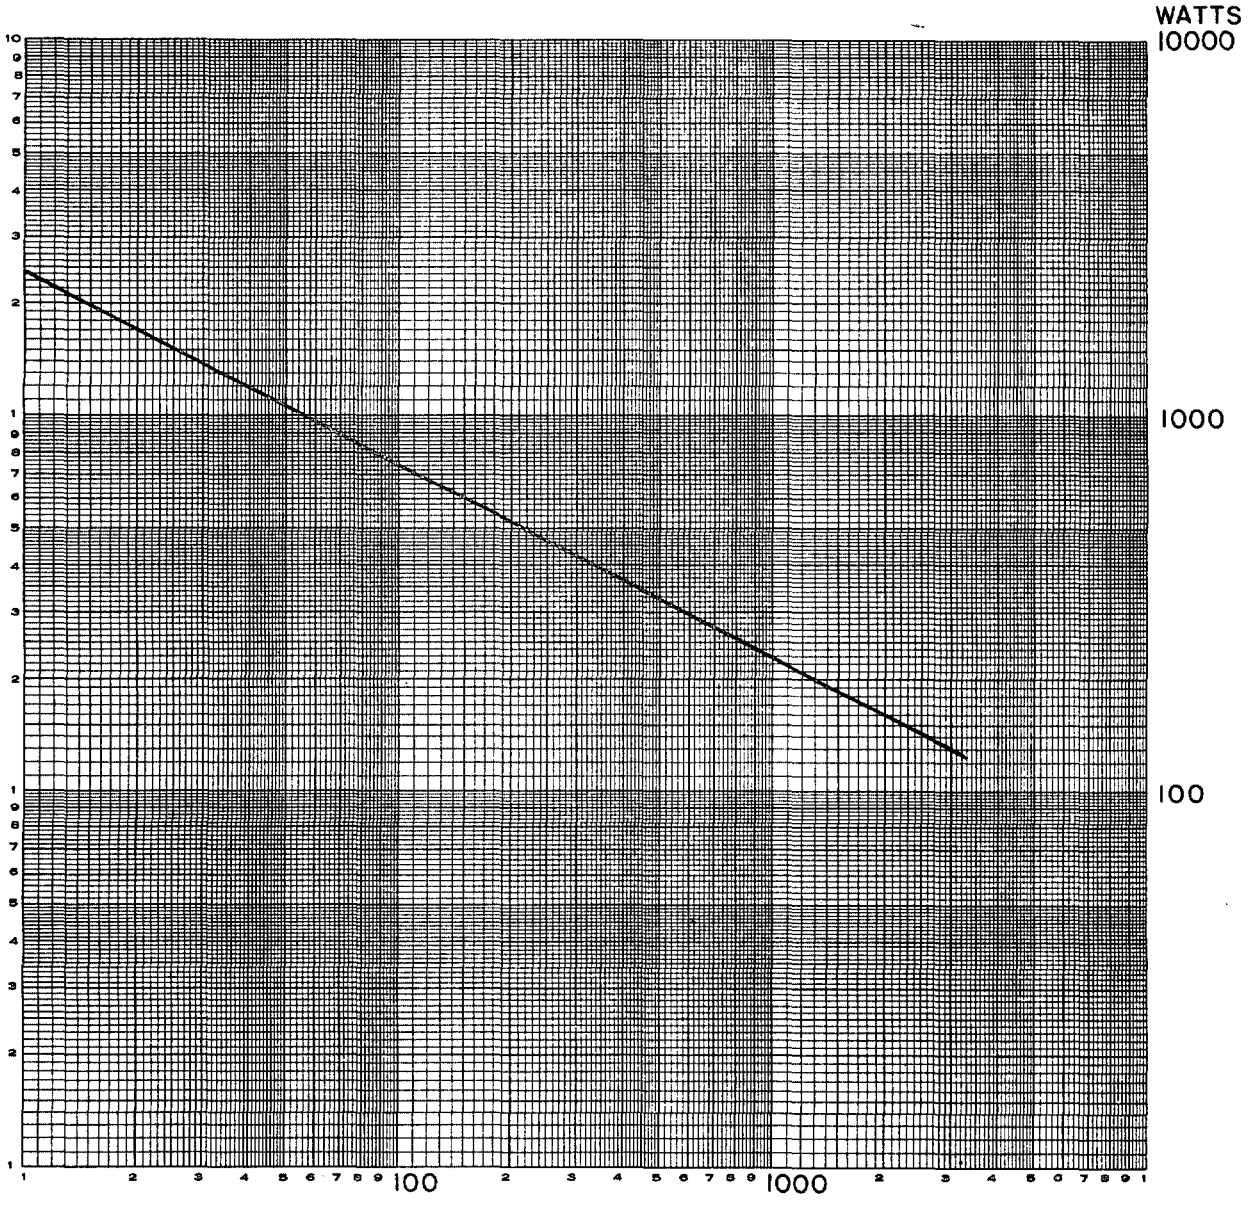


MAX POWER _____

Power rating for information only.

FIGURE 2. Power rating @ 25°C sea level.



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:18Z
Check the source to verify that this is the current version before use.

ENGINEERING INFORMATION:

Continuous working voltage: 1,100 V rms, maximum.
Operating frequency: 3 GHz, maximum.
Velocity of propagation: 69.5 percent, nominal.
Operating temperature range: -55°C to +200°C
Inner conductor properties:
DC resistance (maximum at 20°C): 32.8 ohms per 100 feet.
Elongation: 8 percent, minimum.
Tensile strength: 80 klbf/inch$^2$, minimum.
Engineering notes: This cable useful in high temperature, high tensile strength applications. (See connector series "TNC" and "BNC" per MIL-C-39012).

REQUIREMENTS:

Dimensions, configuration, and descriptions: See figure 1 and table I.
Environmental and mechanical:
Visual and mechanical: Applicable.
Out-of-roundness: Applicable.
Eccentricity: 10 percent, maximum.
Adhesion of conductors:
Inner conductor to core: 1.5 pounds, minimum; 4 pounds, maximum.
Aging stability: Not applicable.
Stress-crack resistance: +230°C ±5°C mandrel size 7 times the cable diameter.
Outer conductor integrity: Not applicable.
Cold bend: -55°C ±2°C.
Dimensional stability: +200°C ±5°C.
Inner conductor from core: .187 inch, maximum.
Inner conductor from jacket: .250 inch, maximum.
Contamination: Not applicable.
Bendability: Not applicable.
Weight: 178 pounds per 100 feet, maximum.
Flammability: Applicable.

ELECTRICAL:

Continuity: Applicable.
Spark test: 2,000 V rms, minimum.
Voltage withstanding: 2,000 V rms, minimum.
Insulation resistance: 5,000 megohms, minimum.
Corona extinction voltage: 1,500 V rms, minimum.
Characteristic impedance: 95 ohms ±5.
Attenuation: 18 dB per 100 feet maximum at .4 GHz.
Structural return loss: Not applicable.
Capacitance: 15.4 pF per foot, maximum.
Capacitance stability: Not applicable.
Capacitance unbalance: Not applicable.
Transmission unbalance: Not applicable.
Phase stability: Not applicable.
Mechanically induced noise voltage: Not applicable.
Time delay: Not applicable.

Part number: M17/139-00001.



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES, IS

User activities:
Army - AR, AT, ME
Navy - AS, MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 6145-0869)



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:18Z
Check the source to verify that this is the current version before use.