INCH-POUND
A-A-55060A
December 6, 2023
SUPERSEDING
A-A-55060
June 19, 1992

COMMERCIAL ITEM DESCRIPTION

GLOVES, MEN'S AND WOMEN'S HEAVY DUTY

The General Services Administration has authorized the use of this Commercial Item Description (CID) as a replacement for MIL-G-2366 for all federal agencies.

1. SCOPE. This CID covers the requirements of heavy-duty leather work glove for use by both men and women.

2. CLASSIFICATION. The men's and women's heavy duty leather work gloves will be of one (1) type in the following sizes:

2.1 Sizes. (see 7.5).

Size: 1, 2, 3, 4, and 5.

3. SALIENT CHARACTERISTICS.

3.1 Description. The gloves (see Figure 1) shall be a slip-on, half inseamed, all leather, gun cut design with a buckle strap closure on the back of the wrist and a leather reinforcement covering the palm. Constructed of full grain leather, one-piece back and front, continuous thumb inseam with full welt inserted or separate back and front piece, lap seam joined at thumb side of index finger, continuous thumb inseam with partial welt inserted, except back may be split leather.

3.1.1 Figure. Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.2 Materials.

3.2.1 Basic material. The gloves shall be made from full grain cattlehide or full grain horsehide. The full grain cattlehide shall conform to all requirements of Type II, Class A or B of MIL-DTL-40051, except for thickness requirement. The full grain horsehide shall conform to all requirements of Type VII of MIL-DTL-32092, except for thickness requirement. As an alternate to full grain leather, split cattlehide leather may be used for the back piece of the glove. The split cattlehide shall conform to all requirements of Type VIII of MIL-DTL-32092, excluding the thickness requirements and it shall conform to the colorfastness requirements of Type V of MIL-DTL-32092. The thickness of the leather in the finished gloves, except the welts, shall be no less than 3.1 ounces or greater than 4.0 ounces when tested in accordance with ASTM D1813. The thickness of the leather welt strap and the thumb welt shall be no less than 2.0 or greater than 4.0 ounces when tested in accordance with ASTM D1813.
The gloves shall be paired with left and right hands of corresponding leather types.

3.2.2 Color. The color of the leather shall be cream or as specified in the contract or purchase order. The finished leather shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.2.1 Visual shade matching. The color and appearance of the leather shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.4.1) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the leather shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65 (see 7.4.2). The leather shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200).

3.3 Thread. The gloves shall be sewn with a natural color thread conforming to Type II, Class A, Tex size 90, 3 or 4 ply of A-A-59826. As an alternate natural color polyester thread conforming to Type II, Class I, Subclass A, Tex size 90, 3 or 4 ply of A-A-59963 may be used. Use of Type I (soft finish) of A-A-59826 may be used as an alternate for bobbin only. Neither cotton nor aramid threads shall be used for stitching any part of the glove.

3.3.1 Stitches, seams and stitching. All stitching shall be 9 - 11 stitches per inch and shall conform to ASTM D6193. Prior to setting the middle and ring fingers into the palm, the fingers shall be joined together with a lapped seam not less than 3/16-inch nor more than 5/16-inch wide with two (2) rows of stitching 1/16 to 1/8-inch gauge. The thumb piece shall be inseam sewn 1/16 to 3/16-inch gauge to the hand and the base of the fingers with a leather reinforcement welt in the seam from crotch to crotch to cover the stitching as shown in Figure 1. The curved fingertips of the four (4) fingers shall be shirred on the palm side prior to the closing operations and the tape shall have two (2) rows of stitching or bartacks located at the buckles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.4 Tape. The tape shall be woven cotton, conforming to the requirements of Type I, Class 3, 5/8-inches wide of MIL-DTL-43566. The color of the tape shall match the color of the leather.

3.5 Buckles. The buckles shall be 5/8-inch, double bar, tongueless, lip type and shall conform to Type II, Style 3, Class 3 requirements of MIL-B-543.

3.6 Combination size, identification, and instruction label. Each glove shall have a combination size, identification, and instruction label in accordance with Type VI, Class 4 of MIL-DTL-32075. When cattlehide is used, the nomenclature in the label shall be Gloves, Heavy Duty, Cattlehide. When horsehide is used, the nomenclature in the label shall be Gloves, Heavy Duty, Horsehide. The label shall contain the following information:

SIZE: MEDIUM (EXAMPLE)
NSN: XXXX-XX-XXX-XXXX
ITEM NAME:
CONTRACT NUMBER:
CONTRACTOR'S NAME:

A printed slip of thin paper containing use and care instructions as indicated below shall be inserted in each right-hand glove:

WEARING INSTRUCTIONS

In cold weather wear gloves over glove inserts.
In warm weather the glove without the insert is sufficient.
Fit gloves snugly but not tightly over glove inserts. Adjust strap for fit. Wash gloves in mild soap and lukewarm water or dry-clean them.
Dry gloves and glove inserts away from extreme heat or flame.
When conditions require chemical protective handwear to be worn, the leather gloves are to be worn over the chemical protective handwear to provide maximum durability.

3.6.1 Barcode hangtag. Each glove shall be individually barcoded with hangtag label conforming to Type VIII, Class 17 of MIL-DTL-32075. The barcoding element shall be a 13-digit National Stock Number (NSN). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be human-readable interpretation (HRI), located so that it is completely visible on the glove when it is folded and/or packaged as specified causing no damage to the gloves. This UPC code must also be located so that it is completely visible. Each tag shall have in addition the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

MADE FOR DEFENSE LOGISTICS AGENCY
CONTRACTOR'S NAME:
CONTRACT NUMBER:
SIZE:
NSN: XXXX-XX-XXX-XXXX
GLOVES, HEAVY DUTY (see 3.6)

3.7 Patterns. The Government shall furnish a complete set of patterns or a master pattern with grade rules to maintain uniformity and consistency in manufacturing. The Government patterns shall be used to create the contractor's working patterns. Minor pattern modifications are permitted to accommodate manufacturing procedures; however, the design and finished measurements must be obtained. Pattern guidelines shall not be modified. Adhesive patterns are prohibited, and the Government will furnish all five (5) size patterns of the item. Pattern parts shall be as listed in Table I.

TABLE I. List of pattern parts.

Basic Material	Nomenclature	Pattern Abbreviation	Cut Number
	Ring Finger 1	A_A_55060-RING-FNGR1	2
	Ring Finger 2	A_A_55060-RING-FNGR2	2
	Ring Finger 3	A_A_55060-RING-FNGR3	2
	Ring Finger 4	A_A_55060-RING-FNGR4	2
	Ring Finger 5	A_A_55060-RING-FNGR5	2
	Middle Finger 1	A_A_55060-MDDL-FNGR1	2
	Middle Finger 2	A_A_55060-MDDL-FNGR2	2
	Middle Finger 3	A_A_55060-MDDL-FNGR3	2
	Middle Finger 4	A_A_55060-MDDL-FNGR4	2
	Middle Finger 5	A_A_55060-MDDL-FNGR5	2
	Back Thumb 1	A_A_55060-BCK-THUMB1	2
	Back Thumb 2	A_A_55060-BCK-THUMB2	2
	Back Thumb 3	A_A_55060-BCK-THUMB3	2
	Back Thumb 4	A_A_55060-BCK-THUMB4	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts. - Continued

Material	Nomenclature	Pattern Abbreviation	Cut Number
Basic Material	Back Thumb 5	A_A_55060-BCK-THUMB5	2
	Back Hand 1	A_A_55060-BCK-HAND1	2
	Back Hand 2	A_A_55060-BCK-HAND2	2
	Back Hand 3	A_A_55060-BCK-HAND3	2
	Back Hand 4	A_A_55060-BCK-HAND4	2
	Back Hand 5	A_A_55060-BCK-HAND5	2
	Front Hand 1	A_A_55060-FRT-HAND1	2
	Front Hand 2	A_A_55060-FRT-HAND2	2
	Front Hand 3	A_A_55060-FRT-HAND3	2
	Front Hand 4	A_A_55060-FRT-HAND4	2
	Front Hand 5	A_A_55060-FRT-HAND5	2
	Palm Patch 1	A_A_55060-PALM-PTCH1	2
	Palm Patch 2	A_A_55060-PALM-PTCH2	2
	Palm Patch 3	A_A_55060-PALM-PTCH3	2
	Palm Patch 4	A_A_55060-PALM-PTCH4	2
	Palm Patch 5	A_A_55060-PALM-PTCH5	2

NOTE: Basic Material: Leather (cattlehide or horsehide). No mixing of leather within a glove.

3.7.1 Sizes and finished measurements. The finished gloves shall conform to the measurements as specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

TABLE II. Sizes and finished measurements (inches).

Size	Overall length 1/	Width 2/
1	9-3/8	4
2	9-3/4	4-1/2
3	10-1/8	5
4	10-1/2	5-1/2
5	10-7/8	6
Tolerance	+3/4, -1/4	±1/4

1/ Length - Measurement taken from tip of middle finger to edge of cuff.
2/ Width - Measurement taken by stretching out the glove and measuring 1/2-inch from base of little finger.

3.8 Workmanship. The finished gloves shall conform to the quality of product established in this document. The gloves shall be free from defects which would affect its serviceability, appearance, uniformity, and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13693; as applicable. (See 7.1.2 and 7.1.3)

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The gloves provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished gloves offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

5.4 Visual examination. Each finished glove set shall be examined for the defects listed in Table III. The lot size shall be expressed in pairs of gloves. The sample unit shall be one (1) pair of gloves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

TABLE III. Visual examination defects.

Material defects (leather and tape) Any hole, cut, abraded area, tear, or rip; permanent fold, pleat, or crease; any spot or stain or foreign matter on outside. Leather and tape color not as specified or not uniform due to discoloration, any outwardly visible part shaded, any serious material defect or objectionable odor. Leather not full grain except where split cattlehide is allowed. Grain damage or imperfections. Leather improperly cut. Leather not soft and pliable; flakey; loose or spongy; bony or thin spots.
Stitches, seams, and stitching Loose or tight stitching tension, broken or missing thread or stitch, needle chew or improper stitching; any open seams, any part caught in an unrelated operation or stitching; thread breaks, thread ends not removed; any seam slippage, re-stitching, pleating, or puckering; distorted, open, pulled, or snagged stitches, twisted, ragged or inconsistent edge. Twisted fingers or thumb where any part of the seam is rotated 45 degrees or greater from the vertical.
Workmanship Distorted parts or poor workmanship. The finished gloves shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed. Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, any dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels Label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on packaged item, bar code attachment causes damage to the item.
Packaging Not packaged in accordance with the contract or purchase order.

5.5 Dimensional examination. The finished gloves shall conform to the dimensions specified in Table II when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) pair of gloves.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or procurement documents (see 7.5).

7. NOTES.

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

7.1.2 EPA and EO 13693 information are available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) ae available online at https://acquisition.gov.

7.2 Source of Non-Government documents.

7.2.1 AATCC Standards are available for purchase online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 - Sampling Procedures are available online at https://asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The gloves are intended for heavy duty work. They may be worn alone or, for additional warmth under cold conditions, may be worn with glove inserts. The gloves are also intended for wear over chemical protection field handwear.

7.4 Standard samples. For access to standard shade samples of leather, address the contracting activity issuing the invitation for bids or request for proposal.

7.4.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.4.2 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75.

7.5 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description
b. Size required (see 2.1)
c. Color required (see 3.2.2)
c. Product conformance (see 5.1)
d. Acceptance criteria (see 5.6)
e. Packaging requirements (see 6.)

7.6 National stock number (NSN). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSN	Size
8415-00-268-7871	1
8415-00-268-7872	2
8415-00-268-7869	3
8415-00-268-7870	4
8415-00-268-7868	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

7.7 Key words.

Cattlehide
Horsehide
Split leather

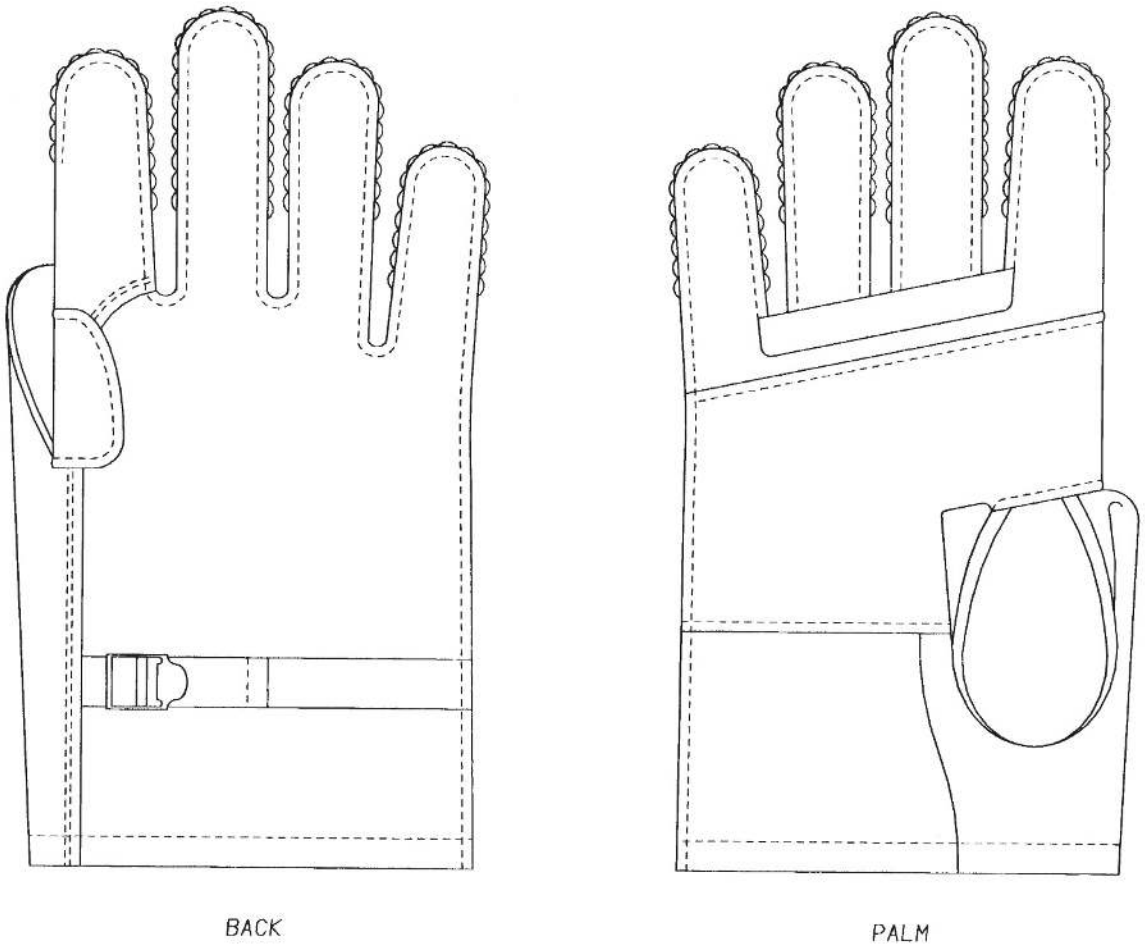


FIGURE 1. Gloves, Men's and Women's Heavy Duty– Back and Palm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - NU
Air Force 11

Review Activities:
Army – MD
Navy - MC, SH

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FAS

Preparing Activity:
DLA - CT

(Project: 8415-2024-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.